

## Development of a tensiometer-TDR coil probe for the measurement of soil-water retention curves on water-repellent soils

SUBEDI, Shaphal<sup>1\*</sup>, Ken Kawamoto<sup>1</sup>, Per Moldrup<sup>2</sup>, Lis Wollesen de Jonge<sup>3</sup>, Toshiko Komatsu<sup>1</sup>

<sup>1</sup>Saitama University, <sup>2</sup>Aalborg University, <sup>3</sup>Aarhus University

Soil-water repellency accounts for influencing many of the key soil hydrological processes such as reduced infiltration, preferential flow and surface water flow. Water repellency-induced fingered flow can lead to considerable variations in water content in an initially water repellent soil. The precise and continuous measurement of hydraulic properties of water repellent soils is important for understanding soil-water interaction. Moreover, there is a need for small-scale, non-destructive measurement techniques to obtain direct, high resolution measurement of soil-water content and water potential. To study the soil-water retention properties for hydrophobized sands and natural volcanic ash soil during repeated wetting and drying processes, a mini tensiometer-time domain reflectometry (T-TDR) coil probe was developed with dimensions of 6-mm diameter and 30-mm length. Seven mini T-TDR coil probes were developed and the performances were tested against Toyoura sand, hydrophobized sands and volcanic ash soil. Due to the poor performance of dielectric mixing models, a simple two-point calibration equation was proposed. The new mini T-TDR coil probe also provided reliable, simultaneous measurements of volumetric water content and soil-water potential ( $h$ ) measurements when investigating the soil-water retention characteristics of hydrophobized sands and natural volcanic ash soils under repeated wetting and drying cycles.

Keywords: Mini T-TDR coil probe, soil-water retention, water repellency

## Parameter Estimation of Hysteretic Soil Hydraulic Functions of an Andisol using the Multistep Outflow-inflow Experiments

RUDIYANTO, Rudyanto<sup>1\*</sup>, TORIDE, Nobuo<sup>1</sup>

<sup>1</sup>Graduate school of Bioresources, Mie University

Japanese volcanic ash soils, Andisols, have unique physical properties. For example, the water retention curve of an Andisol generally has a dual-porosity shape resulting from separate macropore (inter-aggregate) and micropore (intra-aggregate) contributions, and a very high saturated water content (often as high as  $0.85 \text{ cm}^3/\text{cm}^3$ ) because of the inherent nature of soil aggregation in these soils. Since capillary retention is dominant in inter-aggregate pores, hysteresis in water retention curves may occur between drying and wetting processes. This study presents inverse estimation of hysteretic soil hydraulic functions of Andisol using the multistep outflow-inflow experiments.

An Andisol from an upland field at the National Institute of Vegetable and Tea Science in Mie, Japan was passed through 2 mm sieve. The soil was packed with a bulk density of  $0.75 \text{ g/cm}^3$  in a 5-cm-long, 5-cm-diameter acrylic column having a porous plate at the bottom. The bottom boundary pressure ranging from 0 to -85 cm was controlled for drainage and wetting from the bottom. A tensiometer was installed horizontally at 2.5 cm depth. Cumulative water outflow-inflow was monitored based on the weight of the soil column.

Soil hydraulic functions described with a bimodal van Genuchten (VG) introduced by Durner (1994) were separately estimated for drainage and wetting. We assumed hysteresis only appears in the first part of the VG function. When  $\alpha_1$  values for the first VG are different between drying ( $\alpha_1^d$ ) and wetting ( $\alpha_1^w$ ), however, hysteretic unsaturated hydraulic conductivity in terms of water contents appears in lower water contents. Hence we defined an independent  $\alpha_1^k$  for the unified unsaturated conductivity in terms of water contents. Initial values for the bimodal VG were determined based on the observed water retention curve. Parameters  $\alpha_1$ ,  $n_1$ ,  $w_2$ ,  $K_s$  and  $l$  were optimized for the objective functions of pressure readings, cumulative water flux at the bottom, and the average water contents of the soil column using HYDRUS1D. The modified hydraulic conductivity of bimodal VG was found to successfully describe hysteretic soil water retention and unsaturated hydraulic conductivity in term of pressure head, whereas the estimated unsaturated hydraulic conductivity is non-hysteretic in terms of water content.

Keywords: Andisol, Hysteresis, Water retention curve, Unsaturated hydraulic conductivity, Inverse analysis

## Occurrence of soil water repellency and implications for the filtering function of soils

MUELLER, Karin<sup>1\*</sup>, Markus Deurer<sup>1</sup>, Carlo van den Dijssel<sup>1</sup>, Karen Mason<sup>1</sup>, Paramsothy Jeyakumar<sup>1</sup>, John Carter<sup>1</sup>, CLOTHIER, Brent<sup>1</sup>

<sup>1</sup>Plant & Food Research

There is increasing global concern about soil water repellency (SWR) as a soil degradation process. SWR is a transient property expressed in patchy wetting-up behaviour of soils once they dry out below a soil-specific critical water content. It might pose a threat to the delivery of soil ecosystem services in particular to the regulating services in relation to water and carbon, and food provisioning. The understanding of the economic, ecological and environmental consequences of SWR is still limited. Moreover, we are unable to predict when and where SWR will occur, or when it might disappear.

To improve our knowledge on the extent of SWR in the North Island of New Zealand, we conducted a survey on the occurrence of SWR under pastoral land use. We sampled the top 4 cm of soils across 50 sites from ten soil orders and five drought-proneness classes in the summer 2009/10. We found that 98% of the sites will become hydrophobic when they dry out, and that 70% of the sites were hydrophobic at the time of sampling. The survey revealed that the phenomenon of SWR is prevalent throughout all regions and it is independent of climate but it is influenced by soil order. The degree of SWR and its persistence for air-dried samples were positively correlated with the soils carbon and nitrogen contents, and negatively with bulk density. The persistence of SWR for field-fresh samples was additionally negatively correlated with the soil water content.

To improve our understanding of the environmental consequences of SWR, we conducted field and laboratory experiments with water-repellent soils from New Zealand. We focused on the local scale runoff, infiltration and leaching processes. Theoretically, in a hydrophilic dry soil, water infiltrates across the entire cross section of the soil surface. While in soils suffering from SWR, water infiltrates only across a fraction of the soil surface in the form of fingers, or it runs off. Measuring water and ethanol infiltration with tension disc-infiltrimeters in the field, we found that SWR indeed reduced water infiltration by up to a factor of 20. Solute transport experiments through intact soil columns in the laboratory revealed that the soils buffering and filtering services were compromised by soil-water repellency. Enhanced preferential flow was found in the hydrophobic soils with elevated levels of soil organic matter. To quantify directly the impact of SWR on runoff, we developed a laboratory-scale runoff measurement apparatus. We compared the runoff resulting from the run-on of water with that resulting from an ethanol solution. The experiments with the ethanol solution can be taken as a proxy measure of the wetting-up behaviour of hydrophilic soils. No runoff occurred in the experiments with ethanol from any of the soils. We observed that runoff of water did not occur evenly across the entire soil slab, but was concentrated in channels, and covered only a fraction of the soil surface. Consequently, even a soil with an extremely high persistence of SWR resulting in almost the entire run-on water running off the soil slab, lost only a relatively small fraction of the solutes applied evenly to the soil surface, in runoff. We hypothesize that the channel-like pattern of runoff is typical for hydrophobic soils, and that the potential for nutrient loss in runoff from hydrophobic soils is limited.

Our research demonstrated that the filtering and buffering functions of water-repellent soils were compromised at the local scale. Integrating these local phenomena up to a larger scale of a catchment is not straightforward. We are unable to predict the larger-scale impact of water-repellent soils on catchment hydrology, and nor could we predict the impact on the regulating and provisioning ecosystem services that soils provide. More research is needed to understand better the causes and occurrence of SWR, and the larger-scale environmental, ecological and economic impacts of SWR.

Keywords: soil water repellency, infiltration, preferential flow, runoff, pesticide transport, soil organic carbon

## Mass and Heat Transport Characteristics in Differently-Decomposed Peaty Soils at Variably-Saturated Conditions

Shiromi Himalika Dissanayaka<sup>1\*</sup>, Shoichiro Hamamoto<sup>1</sup>, Ken Kawamoto<sup>2</sup>, Toshiko Komatsu<sup>1</sup>

<sup>1</sup>Department of Civil and Environmental Engineering, Saitama University, Japan, <sup>2</sup>Institute for Environmental Science and Technology, Saitama University, Japan

Peaty soils in wetlands are known as one of the major sources and sinks of global C and it is escaped as greenhouse gases to the atmosphere (e.g., Alm et al., 1999; Pilegaard et al., 2003). Knowledge of mass and heat transport characteristics in differently-decomposed and variably textured peaty soils at different moisture contents is important for simulating the emissions of the greenhouse gases, especially methane, from the wetlands (e.g., Alm et al., 1999; Pilegaard et al., 2003). Unique physical Characteristics of peaty soils such as high organic matter content, high total porosity and volume shrinkage may influence various transport properties of peaty soils. In this study, the analogies and differences between the soil transport parameters were investigated for differently-textured and variably-saturated soils and unified models were developed based on modified Archie's laws.

The study site was Bibai marsh, Hokkaido in Japan. Undisturbed peat samples were taken from three different sites in Bibai marsh at different depths using 100cm<sup>3</sup> cylindrical cores. Peat 1 samples were sampled inside the marsh area, while Peat 2 samples were sampled from the area nearby a drainage ditch surrounding the marsh. Peat 3 samples were obtained from forested area located outside the wetland. Fiber contents showed that Peat 3 samples were the most decomposed followed by Peat 2 and Peat 1 samples. The peat samples were initially saturated and subsequently drained using two different methods corresponding to the matric suction ranges. The thermal conductivity (TC), gas diffusivity (Dp), air permeability (Ka) and unsaturated hydraulic conductivity (Kunsat) were measured at different soil moisture suction levels.

A percolation threshold was introduced for each heat and mass transport parameter and the normalized TC, Dp, Ka and Kunsat as a function of normalized fluid content suggested a strong analogy between these parameters. This analogy was well represented by an excluded volume expansion of Archie's second law. It showed a clear two-region behavior suggesting the applicability of the new two-region model concept for bimodal porous materials. However, each parameter showed its own characteristic behavior with different fluid contents. Model curves for the each transport parameter by using Archie's law with reference point (EXAR) were fitted well to the measured data for all transport parameters for both pore regions. And the consistent parameter values of the Archie saturation exponents (n) in two regions were obtained for three peaty soils. Thus, the EXAR models seem useful for describing the two-region behaviors of heat and mass transport parameters for peaty soils. In perspective further studies will be conducted to obtain all four parameters across same soil moisture conditions.

Keywords: Mass and heat transport, Peaty soil, Differently decomposed, Differently saturated

## Modeling of fate and transport of rice pesticide in river basin a case study for the Chikugo River basin

KONDO, Kei<sup>1\*</sup>, WATANABE Hirozumi<sup>1</sup>, PHONG, THAI K.<sup>2</sup>, YOSHINO Katsunori<sup>3</sup>, HIRAMATSU Kazuaki<sup>4</sup>, INOUE Tsuyoshi<sup>5</sup>

<sup>1</sup>Tokyo University of Agriculture and Technology, <sup>2</sup>University of Queensland, <sup>3</sup>Sekisui Chemical CO., LTD, <sup>4</sup>Kyusyu University, <sup>5</sup>Water Supply Authority of Southern Fukuoka Prefecture

Pesticide runoff from paddy field is one of the major causes on non-point source pollution in aquatic environment. It may induce the adverse effects on the aquatic life via pesticide exposure. Various monitoring studies have reported that rice pesticides were detected at public water area during rice cultivation season so far. Meanwhile, verification of monitoring results using a mathematical model based on the field data have hardly conducted. Therefore, this study aims to develop a mathematical model to assess the pesticide exposure in paddy watershed.

An integrated model, named the PCPW model, was developed in this study. The model consists of three sections; river section, paddy block section, and non-paddy section. In the river section, while solving Saint-Venant equations were solved numerically with the Preissmann implicit scheme for unsteady flow simulation, one-dimensional advection dispersion equation was solved with the modified finite element method to predict pesticide concentrations. In the paddy block section, a compartment model, named PCPF-B model, was used to simulate water balance and pesticide fate and transport in multiple paddy plots simultaneously. As for the non-paddy section, rainfall-runoff processes for city, upland and forest were estimated using a modified tank model. Numerical solutions of the PCPW model were coded with Visual Basic for Applications in Microsoft Excel.

The PCPW model was verified by comparing simulated results with rice herbicides concentrations collected in Kose river basin located Fukuoka Prefecture, Japan. Hydrologic and soil data in Kose River basin were imported from Geographical Information System (GIS). The target basin was divided into sub-basin. The extracted numerical data such as elevation, area of individual land uses and physicochemical properties of paddy soil were assigned as the input parameters of each sub-basin. The observed data of discharge at reservoir and estimated values from the tank model for forest were imposed as the upstream boundary condition for unsteady flow simulation. Information regarding applied herbicide, such as application date and usage ratio, physicochemical properties, and recommended water management were prepared from literatures. The two rice herbicides, pretilachlor and mefenacet were selected as the target compounds. Simulation was conducted from June to July in 2009. Simulated herbicide concentrations at up-, mid- and downstream of Kose River were evaluated with observed concentrations.

Results showed that river flow rates were predicted satisfactory. The simulated herbicide breakthrough curves show two distinct shapes; broad and sharp ones. Judging from rainfall data and applied water management scenario, it was considered that the former was due to water management and the latter was due to intensive rainfall events. Aforementioned results indicated that the PCPW model was potentially applicable for advanced assessment tool of pesticide exposure in river basin.

Keywords: rice herbicide, simulation model, river basin, GIS

## Behaviors of carbon dioxide in soils as affected by tillage systems

GUO, Linlin<sup>1\*</sup>, MIYAZAKI, Tsuyoshi<sup>1</sup>, NISHIMURA, Taku<sup>1</sup>, IMOTO, Hiromi<sup>1</sup>

<sup>1</sup>University of Tokyo

Agricultural practices have the potential to store or emit greenhouse gas which is a crucial part of sustainable development. Therefore the study of carbon sequestration especially the behaviors of carbon dioxide in soils under different agricultural practices are so significant. Considered about tillage is one of the most important agricultural managements and some contradictions also existed in recent literatures, this research aimed at the effects of tillage management on carbon dioxide behaviors (CO<sub>2</sub> flux, concentration) and carbon store in soil. We sampled the undisturbed soil columns from the field and incubated in greenhouse that the temperature and water content were controlled. The results indicated that: The cumulated CO<sub>2</sub> flux of tillage soil was 377.8g m<sup>-2</sup> that was greater than no tillage soil (332.3 g m<sup>-2</sup>) during the whole incubation period. But the significant higher CO<sub>2</sub> concentrations in no tillage soil profile were measured compared with the tillage soil especially in the 7.5cm, 12.5cm, 20cm and 30cm depth. The result did not coincide with the general situation that high concentration may reflect the high production of CO<sub>2</sub>. Also soil environment such as temperature, water content and structure were different under two tillage systems. In general CO<sub>2</sub> behaviors and carbon cycling in soil were affected by tillage systems and the mechanism of the impacts on CO<sub>2</sub> production and transfer will be detailed analyzed in the presentation.

Keywords: Tillage systems, CO<sub>2</sub> flux, CO<sub>2</sub> concentrations, Soil carbon, Incubation experiment

## Characterization of Solid waste material from industrial landfill in Japan

Damith Nandika Hiniduma Liyanage<sup>1\*</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, Japan

T. Koide<sup>2</sup>, K. Kawamoto<sup>1, 2</sup>, S. Hamamoto<sup>1, 2</sup>, T. Komatsu<sup>1, 2</sup>, and K. Endo<sup>3</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, Japan

<sup>2</sup>Institute for Environmental Science and Technology, Saitama University, Japan

<sup>3</sup>Center for Material Cycles and Waste Management Research, National Institute for Environmental Studies, Japan

### Abstract

Knowledge of geotechnical properties of solid waste properties and their dependencies on the age (i.e., degradation of organic matter) and composition of solid waste material is important for optimizing design of engineering landfill and assessing its long-term performance. In this study, geotechnical properties of solid material with different size fractions taken from an industrial waste landfill in Japan were measured. Laboratory tests were performed to determine the index properties of water content, grain size distribution and composition, total organic content, C/N ratio, specific gravity, Atterberg limits, pH and EC values, and geotechnical properties of compaction, compressibility and shear strength parameters. Field moisture content of solid waste was around 48% and liquid limit and plastic limits were 65% and 42%, respectively. The specific gravities of solid waste material were 2.72 and 2.62 for the finer fraction (grain size less than 2mm) and coarser fraction (grain size lesser than 10mm) respectively. The C/N ratio of waste was around 56 for finer fractions. In addition, ignition losses were about 18.2% and 17.2% for finer fraction and coarser fraction, respectively. Higher C/N ratio and ignition loss value might suggest that the solid waste at finer fraction contains higher amount of less-decomposable organic matters. The pH value of landfill material is about 8.8 and EC value is about 2.8mS/cm, then both values prove that waste material is alkaline. Based on the measurement of the geotechnical properties for solid waste material with different size fraction, the relation between index and geotechnical properties will be investigated.

**KEYWORDS:** solid waste, landfill, index properties, geotechnical properties, degradation

## Kinetics of Biological Methane Oxidation for Some Selected Composts and Landfill Cover Soil

ABBAS, Zafar<sup>1\*</sup>, Shoichiro Hamamoto<sup>2</sup>, Ken Kawamoto<sup>2</sup>, Toshiko Komatsu<sup>2</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, 225 Shimo - Okubo, 338-8570 Japan, <sup>2</sup>Institute for Environmental Science and Technology, Saitama University, 225 Shimo-Okubo, Sakura-Ku,

The microbial oxidation of methane in landfill cover soil highly contributes to reduced methane emissions from landfill sites. In previous studies, composts are used to promote methane oxidation since methane degradation rates in the landfill cover soils and composts can be expressed by biological kinetic parameters ( $K_m$ :  $V_{max}$ ). In this study using two different compost materials and soil-compost mixtures at different moisture conditions, the biological kinetic parameters were measured. Compost samples with different water content were incubated under around 8% of  $CH_4$  as initial concentration at 30°C. The results from all incubation experiments showed that for every material there was an optimum moisture content at which microbial oxidation of methane is highest. Three kinetics parameters were calculated to fully describe methane oxidation kinetic and also assess the effect of oxygen concentration on methane oxidation rate.

Keywords: Composts, Landfill Cover Soil, Biological Kinetic Parameters



## Composition change from fluvial to estuarine environment: Mahaweli River, Sri Lanka

YOUNG, Sansfica<sup>1\*</sup>, Hiroaki Ishiga<sup>1</sup>, Amarasooriya Pitawala<sup>2</sup>

<sup>1</sup>Department of Geoscience, Shimane University, 690-8504, Matsue, Japan, <sup>2</sup>Department of Geology, University of Peradeniya, Peradeniya, Sri Lanka

The sediments from the Mahaweli River is brought and deposited at the Trincomalee bay a natural deep submarine canyon. In the river most elemental concentrations increase with a decrease in particle size. Regional differences reflect the mass transfer process from terrestrial areas to coastal seas and the influence of the local marine geology. The mean chemical compositions of coastal sea sediments are not similar to those of stream sediments in adjacent terrestrial areas. This observation supports the fact that coastal sea sediments have certainly originated from a mixture of terrestrial and marine materials. The low concentrations of all elements except Sr and Ca in the bay area attribute to the dilution effect due to quartz. However, the spatial distributions of elemental concentrations are not always continuous between the land and coastal seas. The estuary circulation causes the heavy minerals to deposit in the west side of the Trincomalee bay and Th/Sc-Zr/Sc shows that the sediments are of andesite to rhyolite in composition.

Keywords: Mahaweli River, Trincomalee bay, heavy minerals, terrestrial, marine

## Computational Physics of Flow Through Porous Media: Permeability Scaling

WINTER, Larry<sup>1\*</sup>, HYMAN, Jeffrey<sup>1</sup>, SMOLARKIEWICZ, Piotr<sup>2</sup>

<sup>1</sup>University of Arizona, <sup>2</sup>National Center for Atmospheric Research

The advent of high-performance computers and advanced fluid dynamics simulation codes allows the Navier-Stokes equations to be solved in realistic three-dimensional pore spaces. As a result it is possible to perform computational experiments on virtual and real porous media that are equivalent in accuracy to physical experiments while yielding unprecedented levels of detail about the resulting flow fields. We will discuss a set of simulations that are aimed at understanding the dynamical basis behind empirical estimates of permeability like the Kozeny equation and related power law models. The Kozeny equation states that the permeability of a porous medium is proportional to the product of porosity with the square of mean hydraulic radius. A Kozeny-type equation is a more general function of porosity and/or hydraulic radius that estimates permeability, in this case a power law. Since its introduction in 1927, the Kozeny equation has been widely applied, but with mixed results. We present computational evidence that the Kozeny equation is most accurate when applied to samples of porous media that fall in a range of porosities between 0.3 - 0.7. In general, the Kozeny equation does not apply to low or high porosity media, and it is less accurate than power law alternatives at all levels of porosity including 0.3 - 0.7. Specifically, we compare estimates of permeabilities based on the Kozeny equation to estimates obtained from three Kozeny-type power laws. Since we produce the entire velocity field within explicit an pore space, we also are able to observe individual streamlines and calculate their tortuosities. We compute statistics of streamline lengths and corresponding breakthrough curves. Based on these microscopic statistics we observe that streamlines fall into two classes: (1) normal streamlines of particles that remain near their neighbors throughout the flow field, i.e., streamlines with low Lyapunov exponents, and (2) streamlines with high Lyapunov exponents that exhibit chaotic behavior by swiftly moving away from their initial neighbors.

Keywords: Porous Media, Permeability Scaling, Kozeny equation, Streamlin

## Numerical analysis of fate and transport of leaked heat exchanger fluids in borehole

MORITANI, Shigeoki<sup>1\*</sup>, SAITO, Hirotaka<sup>1</sup>, MUTO, Hiromu<sup>1</sup>, Yuji Kohgo<sup>1</sup>

<sup>1</sup>Tokyo University of Agriculture and Technology, <sup>2</sup>Tokyo University of Agriculture and Technology, <sup>3</sup>Tokyo University of Agriculture and Technology, <sup>4</sup>Tokyo University of Agriculture and Technology

The ground source heat pump (GSHP) systems need to be evaluated in terms of potential risk on groundwater contamination due to the leakage of heat exchanger fluids. The antifreeze fluid is widely used as heat exchanger fluid for the closed GSHP system with ethylene glycol and propylene glycol. Although the toxicity of these fluids is low, the fluid leakage from the tube can deteriorate groundwater quality. As increasing in the installation of GSHP, the risk of ground and groundwater contamination becomes higher. The objective of this study was therefore to predict the fate and transport of leaked heat exchanger fluid around the borehole.

HYDRUS software was used in this study to simulate the fluids transport, which was based on the numerical solution of Richards equation for variably saturated water flow in porous media and advection-dispersion equations for solute transport in the liquid phase. The analysis domain was 10 m \* 10 m \* 50 m with 10 geological layers to mimic the GSHP system installed at the study site in Tokyo University of Agriculture and Technology. Hydrological and thermal properties obtained from borehole core samples were assigned to each layer. Several different leaking scenarios were simulated in this study. This study demonstrated that fate and transport of leaked heat exchanger fluids can be simulated by HYDRUS. This allows the users of GSHP to assess the potential risk of contaminating surrounding ground and groundwater.

Keywords: ground source heat pump, solute transport, potential risk of contaminating

## The groundwater quality and pore water composition of alluvial deposit in Arakawa Low-land, Japan

SAITO, Takeshi<sup>1\*</sup>, Ei Ei Mon<sup>1</sup>, Shoichiro Hamamoto<sup>1</sup>, Takato Takemura<sup>2</sup>, Hirotaka Saito<sup>3</sup>, Jun-ichi Ohnishi<sup>1</sup>, Ken Kawamoto<sup>1</sup>, Toshiko Komatsu<sup>1</sup>

<sup>1</sup>Saitama University / JST, <sup>2</sup>Nihon University / JST, <sup>3</sup>Tokyo University of Agriculture and Technology / JST

The ground source heat pump (GSHP) has been recognized as one of the most energy conserving systems. However, there is a possibility that the thermal disturbance by using the system might affect the subsurface environment including groundwater quality. In this study, the geochemical properties of the groundwater and pore water were discussed to assess the impact of GSHP on subsurface environments.

Three boreholes of 50 m depth were excavated in the campus of Saitama University and groundwater monitoring wells were installed with two strainers for the upper (GL-16.25 m to 17.80 m) and the lower (GL-38.70 m to 40.15 m) aquifers for each well. The groundwater was sampled from both aquifers for several times from October to November, 2011. Also the pore water was extracted by dilution method (dry sample: water = 1: 10) from twenty-one core samples obtained from one of three boreholes. The water quality such as pH, EC, DO, ORP, inorganic dissolved ions, heavy metals and dissolved gases were measured for the groundwater. Only inorganic dissolved ions and heavy metals were measured for the pore water.

In the lower aquifer, the groundwater showed Ca-HCO<sub>3</sub> type, while in the upper aquifer, it was Na, Mg-HCO<sub>3</sub> type and also contained higher concentrations of the dissolved components (EC), Li, B and Sr as compared to the lower aquifer. This might be because the upper aquifer consists of marine sediment. For both aquifers, DO and ORP showed low values and only NH<sub>4</sub><sup>+</sup> was detected as inorganic nitrogen. The dissolved gases such as H<sub>2</sub>S and CH<sub>4</sub> were detected but almost no SO<sub>4</sub><sup>2-</sup> in the groundwater. These facts suggested that the groundwater in both aquifers is under the methanogenesis environment.

High concentrations of heavy metals such as As, Cr, Al and Fe were detected in the pore water of the layer below GL-40 m compared to upper layers. The pore water also contained higher concentrations of heavy metals with comparison to the groundwater. These results imply that heavy metals might dissolve to the groundwater with increase of the subsurface temperature.

Keywords: alluvial deposit, groundwater, pore water, heavy metals

## Temperature effects on hydro-mechanical characteristics of Kaolinite

MON, Ei Ei<sup>1\*</sup>, HAMAMOTO, Shoichiro<sup>1</sup>, SAITO, Takeshi<sup>2</sup>, KAWAMOTO, Ken<sup>1</sup>, KOMATSU, Toshiko<sup>1</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, <sup>2</sup>Institute for Environmental Science and Technology, Saitama University

The concern of thermal effect on geo-mechanical behaviors of soils is growing especially due to the applications of ground source heat pumps (GSHP) as well as nuclear waste disposal facilities in geo-environment. The effects of temperature variation on hydro-mechanical characteristics of clay (Kaolinite) were investigated by using a modified oedometer test. The standard oedometer apparatus was modified by installing heat coils, bender elements, and water tanks, which enable the sequential measurements of consolidation characteristics, shear modulus, and hydraulic conductivity for the sample under different consolidation pressure and temperature conditions. In this study, pre-consolidated Kaolinite (ASP 100 clay) samples (6cm diameter with 10cm height) were used to perform consolidation tests at three temperatures (5°C, 15°C, 40°C). Under each consolidation pressure, the greater saturated hydraulic conductivity ( $K_s$ ) was observed at higher temperature whereas the void ratios were almost similar at the same consolidation pressure. Further measurements of shear modulus, pore size distribution, and surface areas analysis will be performed for the samples during consolidation tests at different temperature conditions. The hydro-mechanical characteristics of kaolinite induced by temperature such as volume change behaviors and hydraulic property will be discussed with information on the micro-scale pore structure of the samples.

Keywords: temperature, hydro-mechanical characteristics, Kaolinite, modified oedometer

## Fusion of Active and Passive Hydrologic and Geophysical Tomographic Surveys: The Future of Subsurface Characterization

YEH, Jim<sup>1\*</sup>

<sup>1</sup>University of Arizona

This presentation explains the need for high-resolution imaging techniques to characterize the subsurface, and then discusses difficulties of traditional characterization approaches, followed by a presentation of recent advances in hydrologic/geophysical characterization of the subsurface: information fusion based on active tomographic survey concepts for field scale problems. It finally concludes with examples and propositions regarding how to collect and analyze data intelligently by exploiting natural recurrent events as energy sources for basin-scale passive tomographic surveys. The development of information fusion technologies that integrate traditional point measurements and active/passive hydrogeophysical tomographic surveys, as well as advances in sensor, computing, and information technologies may ultimately advance our capability of characterizing groundwater basins to achieve resolution far beyond the feat of current science and technology.

Keywords: tomographic survey, information fusion, hydrogeophysical, geophysical

## SPATIO-TEMPORAL RELATIONSHIPS OF CATIONS-ANIONS, F, Fe, & Pb WITH As CONTAMINATED WATER OF KAUDIKASA, CHATTISGARH, INDIA

SHUKLA, Dericks<sup>1\*</sup>, Chandra Shekhar Dubey<sup>1</sup>, Elvis Anup Shukla<sup>2</sup>, Naoto Matsue<sup>2</sup>, Bhupendra Kumar Mishra<sup>1</sup>

<sup>1</sup>Department of Geology, University of Delhi, Delhi., <sup>2</sup>Life Environmental Conservation Department, Ehime University, Matsuyama

Water chemistry presents a widely research area where interactions at rock-water interfaces play a major role in governing the water quality. Elements that are not available in the rock minerals in contact with the water cannot be expected to be present in the final solution. All water contains inorganic contaminants but presence of arsenic has posed a great threat to human health. In recent years lots of work has been done on arsenic in groundwater of India, but its origin is not well established till now. The water sampling carried out in three consecutive years (2006, 2007, and 2008) from Kaudikasa area show high As contamination (max. 4.05 ppm or mg/L) along with high Fe (max. 22.23 mg/L), F (max. 1.85 mg/L) and Pb (max. 0.15 mg/L) well exceeding the WHO limit. Various plots (Piper, Durov, Schoeller) indicate that water belongs to fresh type of shallow zone which has not travelled a long distance according to Chebotarev sequence. There exists a good inverse relationship of cations-anions (except K) with As, Fe and Pb while a direct positive relationship occurs with F. The spatial variation plots show bimodal characteristics for nearly all elements, indicating the presence of a NW-SE boundary. Arsenic, having its source in felsic rocks, gets emplaced in N-S trending quartz reefs; it is leached out to groundwater at this NW-SE boundary. This arsenic is localized in this area, as shown by depth vs. distance and arsenic profile. Hence as one goes away from this hotspot, the arsenic concentration decreases. Thus the interactions of geochemical relationships play a major role in arsenic dispersion in this area.

Keywords: Arsenic, Lead, Spatio-Temporal Relationship, Groundwater Pollution, Kaudikasa, Chattisgarh

## Linking local soil transport processes to catchment hydrology and policy options

CLOTHIER, Brent<sup>1\*</sup>, Steve Green<sup>1</sup>, Markus Deurer<sup>1</sup>, Karin Mueller<sup>1</sup>, Alec Mackay<sup>2</sup>, Jon Roygard<sup>3</sup>

<sup>1</sup>Plant and Food Research, <sup>2</sup>AgResearch, <sup>3</sup>Horizons Regional Council

A dualism between measurement-modelling is needed to link knowledge of water and nutrient losses at the local scale in order to understand hydrology at the catchment scale. New measurement technologies and networks of remote devices, aided by a suite of rapidly improving modelling techniques, are leading to the development of knowledge to link land management of the catchments inventory of natural capital stocks to the diverse ecosystem services that flow from them (Clothier et al., 2011).


Tension fluxmeters, which mimic local hydraulic conditions in the field, are reasonably priced devices that can be installed in networks across catchments and connected wirelessly to record drainage in real-time. This enables timely manual sampling of their reservoirs to determine nutrient leaching. The results from our network of over 400 fluxmeters in New Zealand, Australia, Korea, and the Pacific Islands are providing detailed information to parameterise our mechanistic transport models. As we show, these biophysical models of transport in soil can then provide detailed understanding from which we can develop meta-models of leaching at the farm scale. From this meta-modelling, nutrient leaching from the patchwork of farm enterprises can be linked to the measured quality of receiving water bodies. A challenge is to understand and model the attenuation of nutrients through the diverse transport-pathways to the receiving water bodies. Our initial attempts, just based on empirical inference, are described.

Policy to improve catchment-wide outcomes can take various forms: be it by direct regulation of nutrient inputs, or by grand-parenting through benchmarking and then mandating for a reduction in nutrient losses. Alternatively, this can be done by assessing the value of the provisioning ecosystem services flowing from the landscapes natural capital stocks. We discuss the merits and disadvantages of the various approaches that have been used in different jurisdictions in New Zealand to address the critical issue of water quality in catchments.

Reference: Clothier, B.E., A.J. Hall, M. Deurer, S.R. Green and A.D. Mackay 2011. Soil Ecosystem Services: Sustaining Returns on Investment into Natural Capital. In: Sustaining Soil Productivity & Climate Change: Science, Policy and Ethics, Wiley-Blackwell, Chapter 9, pp 115-137.

Figure. Left: Installing tension fluxmeters in an apple orchard in Australia. Right: Measurements of cumulative drainage and cumulative leaching of nitrogen from two different New Zealand apple orchards.

Keywords: soil water transport, nutrient leaching, tension fluxmeters, modelling, water quality, policy

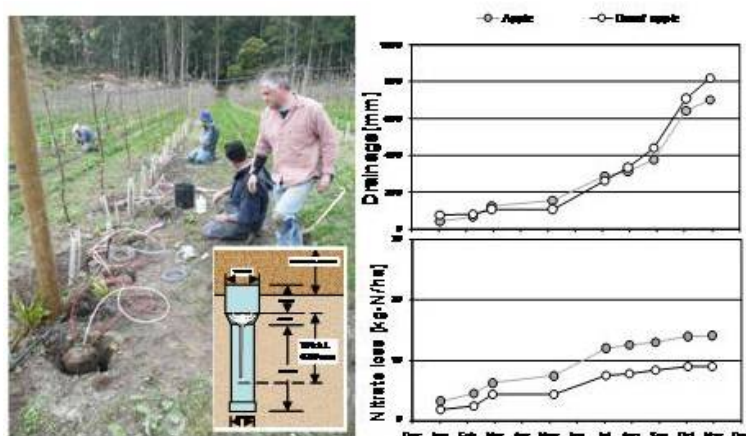



## Enhancing water infiltration and water-holding in soils by macropore system

MORI, Yasushi<sup>1\*</sup>, SUETSUGU, Atsushi<sup>1</sup>, YAMAMOTO, Tetsuya<sup>2</sup>

<sup>1</sup>Okayama University, <sup>2</sup>Shimane University

Artificial macropore was introduced into degraded soil profile to enhance infiltration and water holding capacity. Degraded soils sometimes suffer from heavy rain and the impact of rain drops causes soil crust at the surface. This impermeable layer shows poor infiltration, resulting surface flow and erosion of fertile surface soils. Agriculture practice usually employs tillage, however, this traditional technique would break soil aggregates and cause another particle losses. Therefore, the key issue is enhancing infiltration without tillage. The objective of this research was that enhancing water infiltration into soils and control water distribution in soil profiles using artificial macropores.

Masa soils, one of the degraded soils in western Japan, were packed into columns (diameter:16cm, height:60cm ) to 55cm with a bulk density of 1.45gcm<sup>-3</sup>. Rainfall was applied with a shower device once every three days to greenhouse experiment and continuously applied to growth chamber experiment. The amount of rainfall was maintained 400mm which is typical in semi-arid regions. The rainfall intensities were 2 and 20mmh<sup>-1</sup>, respectively. Water content was monitored at 10,30 and 50cm by soil water sensors. Moreover, overflow surface water was collected by plastic bottles.

As results at greenhouse experiments, columns with artificial macropores reduced surface water while control columns showed high surface water at 20mmh<sup>-1</sup> rainfall. Artificial macropore columns induced rainfall water much deeper than control columns did. Rainfall intensity affected surface soil condition, making surface crust at 20mmh<sup>-1</sup> intensity rainfall. At growth chamber experiments, temperature was controlled at 25 oC to observe water holding ability of artificial macropore columns. Because induced rainfall was kept in deeper profile in the columns, more water was held in artificial macropore columns than controlled columns. In all, artificial macropore systems enables control of infiltration water distribution and hold rainfall water much effectively than natural soil profile. It would make possible for degraded soil to keep water and nutrients in soil profiles.

Keywords: soil environment, macropore, infiltration, carbon storage

## Contaminant Transport Modeling in a Soil with Variable Charge Properties under Different pH Conditions using HP1

CHEN, Daiwen<sup>1\*</sup>, TORIDE, Nobuo<sup>1</sup>

<sup>1</sup>Graduate school of Bioresources, Mie University

The fate and transport of contaminants in soils is a function of not only the fluid flow rate, but also of a range of possible geochemical reactions, including changes in pH. A good example is the transport of solutes in volcanic-ash soils. These soils typically possess a high buffering capacity (i.e., an ability to resist changes in the pH of the soil solution). In particular pH ranges, this capacity is reflected by an increase in negatively charged sites during infiltration of relatively alkaline solutions, and an increase in positively charge sites in case of acid solutions. Hence, values of the cation exchange capacity (CEC) and anion exchange capacity (AEC) can also change, which in turn leads to different sorption behavior. In this study, the soil buffering capacity and adsorption properties were evaluated using a variable charge model describing the pH-dependent charges. Simulations were carried out of two transport scenarios involving cation and anion exchange following the infiltration of alkaline and acid solutions into an initially pH neutral environment. Cation and anion concentrations and changes in the soil solution pH were evaluated using the HP1 simulator. Although the transport scenarios were mostly hypothetical, results showed correct modeling representations of the adsorption dynamics under different pH conditions. The applied approach provides considerable potential for simulating chemical transport in variable-charge soils.

Keywords: pH dependent charge, solute transport, buffering capacity, HP1, Andisol

## Translocation of Fukushima driven $^{137}\text{Cs}$ and $^{134}\text{Cs}$ in forest organic soil layer

MENGISTU, Teramage<sup>1\*</sup>, ONDA, Yuichi<sup>1</sup>, KATO, Hiroaki<sup>1</sup>, Takashi Gomi<sup>2</sup>

<sup>1</sup>Faculty of Life and Environmental Sciences, University of Tsukuba, <sup>2</sup>Tokyo University of Agriculture and Technology

After the Fukushima power plant accident (11 March 2011) a huge amount of radionuclide materials were released. Its distribution and deposition pattern varies depending on the distance from the power plant, weather condition following the accident, topographic features, land cover types and the like. Forest land cover plays a great role on the distribution and deposition pattern of the radionuclide materials mainly by trapping and holding in canopy. Litter, wet and dry fall forms are the major transfer pathways that canopy trapped-radionuclide to reach forest floor. Studies have been carried out on the migration and related behavior of  $^{134}\text{Cs}$  and  $^{137}\text{Cs}$  in forest soil layers following the Chernobyl accident. However, a litter-fed continuum was not included in the process while it is known as major provider of radionuclide to forest floor. Therefore for better understanding of the movement of these radionuclides at least a part from the entire journey, litter-fed continuum has to be enclosed as radioactive recharger to forest organic soil layer. Hence, soil and litter samples are being sampled in Karassawa forest mountain chain, located ca.160 km away from the crippled power plant in Tochigi prefecture. The O-horizon is divided in to three major sub-layers (O1, O<sub>f</sub> and O<sub>h</sub>) according to their status of decomposition. Radionuclide activities in both soil and litter samples were quantified by using gamma ray spectrometry. All the values of the radionuclides were corrected for decay back to 20 May 2011 to analyze only the dynamic of time-dependent down ward velocities at different soil organic layers. Results revealed that the ratio of  $^{134}\text{Cs}$  to  $^{137}\text{Cs}$  in litter was 1.00 and in the absence of soil erosion scenario, litter has contributed 71% of  $^{137}\text{Cs}$  and 97.8% of  $^{134}\text{Cs}$  to their respective total soil inventories. This makes litter the main conveyor of atmospheric radionuclides to forest soil. Since  $^{137}\text{Cs}$  has Chernobyl remnant in the soil, it has been detected up to 30 cm soil depth and has shown relatively faster downward velocity as determined based on its relaxation depth. Whereas  $^{134}\text{Cs}$  is totally originated from Fukushima accident and its depth is limited to upper 10 cm soil layer with 1.6 cm y<sup>-1</sup> downward velocity. A continuum translocation of the radionuclides in different parts of O-horizons that includes litter as year-round sources of radioactivity is under investigation.

Keywords: Cs-137, Cs-134, radionuclide, litter-fed, organic soil horizon

## Geothermal property and groundwater flow estimated from the lithology in the late Pleistocene terrace area, Tokyo, Japan

FUNABIKI, Ayako<sup>1\*</sup>, TAKANO Yoichi<sup>1</sup>, TAKEMURA, Takato<sup>1</sup>, HAMAMOTO, Shoichiro<sup>2</sup>, KOMATSU, Toshiko<sup>2</sup>

<sup>1</sup>College of Humanities and Sciences, Nihon University, <sup>2</sup>Graduate School of Science and Engineering, Saitama University

### Introduction

The ground source heat pump (GSHP) is a highly efficient and renewable energy technology for space heating and cooling, with benefits including energy conservation and reduction in greenhouse gases emission. After the Great Japan Earthquake and following nuclear disasters, GSHP is getting noticed by media and some local governments are introducing GSHP.

On the other hand, the GSHP installation under the ground might enhance pollutions in geo- heat environment or change groundwater flow due to thermal disturbance released from GSHP. In this study, the effect of the GSHP was estimated based on the 3D geological model in the Su Tokyo.

### Geological model

The Tokyo metropolitan area is surrounded by the Late Pleistocene terraces called Musashino uplands. These areas are densely populated residential area. The Shimosueyohi surface is one of these terraces, which was formed along the Tama River, during the last deglacial period.

The CRE-NUCHS-1 core (Funabiki et al., 2011) was obtained from this area to know the lithology, heat transfer coefficient and chemical characteristics of the sediments. In this study, we collected borehole data logs within 5km square surrounding the core site, and created the 3 dimensional geological model. The lithology of this area consists of the Pleistocene Kazusa Group, terrace gravels, and volcanic ash layer called Kanto loam, in ascending order. The terrace gravel layer is located mainly beneath the Kanda, Kitazawa, and Karasuyama Rivers. These rivers flow parallel with the Tama River. At the center of the terraces, Kanto loam covered the Kazusa Group without terrace gravel.

### Geothermal disturbance and groundwater flow

Using the geological model, heat transfer coefficient and groundwater flow velocity was calculated. In areas with thick terrace gravels, the heat transfer coefficient is high and groundwater flow is relatively fast. Since the terrace gravel is located at relatively shallower level (8-20m in depth), its thickness is one of the elements to affect the geothermal disturbance and groundwater flow in this area.

### Acknowledgement

This work was supported by the Core Research Evolutional Science and Technology (CREST) project of Japan Science and Technology Agency (JST).

### Reference

Funabiki et al., (2011) Sedimentary facies and physical properties of the sediment core CRE-NUCHS-1 in Setagaya district, Tokyo, central Japan. Abstracts (Section B) for 2011 joint annual meeting of Japan Association of Mineralogical Sciences and the Geological Society of Japan.

Keywords: Geothermal disturbance, Groundwater, Heat transfer coefficient, Terrace gravel

## Numerical Analysis of Changes in Ground Temperature Caused by Ground Source Heat Pump System using HYDRUS

MUTO, Hiromu<sup>1\*</sup>, Hirotaka Saito<sup>1</sup>, Shigeoki Moritani<sup>1</sup>, Yuji Kohgo<sup>1</sup>

<sup>1</sup>Tokyo University of Agriculture and Technology, CREST, JST

Ground source heat pump systems (GSHP) that use ground or groundwater as a heat source can achieve much higher coefficient of performance (COP) than conventional air source heat pump systems because the temperature of the ground is generally much more stable than that of the air. Heat energy in the ground is then viewed as one of the renewable energy sources. GSHP has been receiving great interests among countries in North America and Western Europe, as well as some developed countries in Asia because it can potentially reduce energy consumption and greenhouse gas emission. While GSHP can inject heat from the buildings to the ground for cooling during the summer, it can pump heat stored in the ground for heating during the winter. Although it is rarely considered, installing too many GSHP systems nearby and/or running GSHP systems for long time may disturb the ground heat source. As some physical, chemical, and biological properties of the ground and groundwater are temperature dependent, this can eventually affect groundwater quality.

The effect of heat injection and pumping on the ground and groundwater temperatures therefore needs to be accurately quantified for assessing environmental impacts. Although there have been a number of studies predicting GSHP heat injection and pumping rates, their goals were usually to design optimum GSHP systems. The main objective of this study was to develop a model that allows predicting not only ground and groundwater temperatures but also changes in physical, chemical, and biological properties with GSHP under operation.

In this particular study, we used HYDRUS software to simulate heat exchange and transfer processes in the ground for a vertical-loop closed GSHP system. HYDRUS allows one to simulate variably-saturated water flow and solute and heat transport in porous media numerically in two- and three-dimensional domains with great flexibility in defining boundary conditions. At first, for model verification, changes in ground temperatures measured at every 5-m in the 50-m observation well installed 3.7 m from the 50-m long heat exchange boreholes, in which polyethylene heat exchanger tubes had been installed, were predicted in response to Thermal Response Test (TRT) conducted at our study site. Then, heat exchange and transfer processes for the vertical closed-loop GSHP systems were simulated to predict changes in ground and groundwater temperatures using three-dimensional domains. In this simulation, inside the polyethylene heat exchanger tube and the tube itself were assumed to be porous media. Very high hydraulic conductivity was assigned to the former, while very low hydraulic conductivity was assigned for the latter so that there would be only negligible water exchange between the ground and the heat exchange tube. This study demonstrated that HYDRUS was a very effective tool to assess the environmental impact, especially the temperature changes, when GSHP systems were used for injecting heat to the ground and pumping heat from the ground.

## Thermal Properties of Non-aggregated and Aggregated Soils: Effects of Particle Size and Shape

KAMOSHIDA, Takahisa<sup>1\*</sup>, HAMAMOTO, Shoichiro<sup>1</sup>, KAWAMOTO, Ken<sup>1</sup>, Sakaki Toshihiro<sup>2</sup>, KOMATSU, Toshiko<sup>1</sup>

<sup>1</sup>Graduate Schol of Sience and Engineering, Saitama University, <sup>2</sup>National Cooperative for the Disposal of Radioactive Waste

Thermal properties of soils including thermal conductivity and heat capacity are very important for understanding heat transport processes at landfill sites, hereunder promoting the site stabilization, and for optimizing heat treatment technique at polluted sites.

Previous studies have shown effects of soil conditions such as moisture content and degree of compaction on the thermal properties for differently-textured soils. However, there are few studies on the relations between the thermal properties and micro-scale soil information such as particle size and shape although the size and shape of soil particles highly affect soil packing configuration (solid-phase tortuosity and contact number).

In this study, non-aggregated and aggregated soils with different size fractions at variably-saturated conditions were used for measuring thermal properties. Micro-scale characterizations of soil-pore structure and soil particle configuration using a Xray-CT device were performed. Mineral composition such as quartz content was also measured for the samples. The relations between the obtained thermal properties for soils under different moisture conditions and their soil structure functions and mineral compositions were investigated.

Keywords: Thermal property, Thermal conductivity, Particles size, Particle shape, Soil-pore structure, Moisture condition

## Landfill Gases at an Abandoned Open Dump: A Case Study from Udapalatha/Gampola Site in the Central Province of Sri Lanka

KOIDE, Takahiro<sup>1\*</sup>, NAGAMORI, Masanao<sup>2</sup>, WIJewardane, K. Nuwan<sup>3</sup>, WATANABE, Yoichi<sup>2</sup>, ISOBE, Yugo<sup>2</sup>, MOWJOOD, M.I.M<sup>4</sup>, KAWAMOTO, Ken<sup>5</sup>

<sup>1</sup>Institute for Environmental Science and Technology, Saitama University, <sup>2</sup>Center for Environmental Science in Saitama, <sup>3</sup>Postgraduate Institute of Agriculture, University of Peradeniya, <sup>4</sup>Department of Agric. Engineering, University of Peradeniya, <sup>5</sup>Graduate School of Science and Engineering, Saitama University

Haphazard dumping of the municipal solid waste mostly observed in developing countries, where the waste is dumped in an uncontrolled manner. Although landfill gas is an important factor which causes odor and indicates stability of the waste, there are very limited studies on the uncontrolled open dumps. In this study, landfill gas samples at 1 m depth from an abandoned open dump in Udapalatha (N 7° 09', E 80° 35') in the Central Province of Sri Lanka were collected on the end of November 2011 and the typical landfill gas composition such as O<sub>2</sub>, N<sub>2</sub>, CH<sub>4</sub>, CO<sub>2</sub>, H<sub>2</sub>, H<sub>2</sub>S, and N<sub>2</sub>O were measured. Buried waste samples at 1 m depth were also taken from the site and organic carbon and nitrogen contents in the residue (smaller than 2 mm) were measured. The samples were taken from some marked plots inside the dump with waste ages of around 0.5 and 7 years (AOD<sub>0.5</sub> and AOD<sub>7</sub>) and outside intact. For comparison, landfill gas samples were also taken from another open dumping, Gohagoda (N 7° 19', E 80° 37') and an engineered landfill in Nuwara-Eliya (N 6° 58', E 80° 48'), those are under operation, in the same province.

Measured CH<sub>4</sub> concentration for AOD<sub>0.5</sub> and AOD<sub>7</sub> ranged in 19-58 % and 0-12 %, respectively, suggesting that the dumped waste at 1 m depth was in the process to be the 'stabilization phase', where the CH<sub>4</sub> concentration is normally less than 45 %, at least 7 years after dumping. This is likely to be a much shorter time period to reach the phase after dumping than those in mid-latitude regions (typically in several decades). Measured CH<sub>4</sub> concentration for both Gohagoda and Nuwara-Eliya ranged in 56-57 %, suggesting that the waste inside were not stabilized. The carbon contents in the waste residue in AOD<sub>0.5</sub> and AOD<sub>7</sub> were 151 and 29 mg g<sup>-1</sup>, respectively, implying that high waste decomposition and leaching of organic compounds might be enhanced due to high temperature and precipitation at the site. A further study for the landfill gas and waste quality in the deeper layer is required to judge whether whole of the dumpsite had reached the stabilization phase rapidly. Besides, relatively high values of N<sub>2</sub>O concentration were observed in some plots at AOD<sub>7</sub> (95 and 39 ppmv), suggesting that nitrification was stimulated due to time-dependent aerobic conditioning in the 1 m depth (measured O<sub>2</sub> concentration for the plots ranged in 13-18%). This indicates that nutrient leaching through runoff and surface water might give an impact to groundwater environment at open dump sites even in the stabilization phase.

Keywords: landfill gas, nutrient leaching, open dump, organic carbon, Sri Lanka, waste decomposition

## Effects of soil-water retention hysteresis on gas and heat transport parameters

SASANUMA, Kumi<sup>1\*</sup>, HAMAMOTO, Shoichiro<sup>1</sup>, KAWAMOTO, Ken<sup>1</sup>, KOMATSU, Toshiko<sup>1</sup>, Sakaki Toshihiro<sup>2</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, <sup>2</sup>National Cooperative for the Disposal of Radioactive Waste

Knowledge of soil-gas and heat transport parameters is essential for understanding and simulating behaviors of greenhouse/toxic gases and changes in soil temperature at landfill sites. Degree of water-saturation at different water potentials (i.e., water retention characteristic) highly affects these gas and heat transport parameters. In this study, the effects of water retention hysteresis on the soil-gas diffusion coefficient ( $D_p$ ), air permeability ( $k_a$ ), and thermal conductivity ( $K_T$ ) were investigated. Different sand particle size fractions with different particle shapes were used for measuring gas and heat transport parameters. The soil-water retention hysteresis highly affected the gas transport parameters, showing higher  $D_p$  and  $k_a$  values for the wetting processes than those for drying processes at the same air content. This suggests that the more continuous air-filled pore-networks in the wetting processes enhanced diffusive and advective gas transport. As compared to gas transport parameters, the effect of soil water retention hysteresis on the  $K_T$  was insignificant for all sand materials.

Keywords: soil-water retention hysteresis, gas transport parameter, heat transport parameter



## Estimation of Water Flux in Variably Saturated Soil with a Penta-Needle Heat Pulse Probe

SAKAI, Masaru<sup>1\*</sup>, KATO, Kaoru<sup>2</sup>, JONES, Scott B.<sup>3</sup>

<sup>1</sup>Graduate school of Bioresources, Mie University, <sup>2</sup>Faculty of Bioresources, Mie University, <sup>3</sup>Department of Plants, Soils and Climate

The penta-needle heat pulse probe (PHPP) employs a central heater needle surrounded by an orthogonal arrangement of four thermistor needles. By inversely fitting an analytical solution for two-dimensional heat transport with an infinite line source, both components of the flux in a plane normal to the axis of the PHPP needles,  $J_x$  and  $J_y$ , thermal conductivity, and thermal diffusivity can be estimated. Using estimated  $J_x$  and  $J_y$ , water flux magnitude and direction can also be calculated. In this study, the applicability of PHPP estimations was tested in both of saturated and unsaturated water flows in sand. Laboratory column experiments under steady-state saturated (flux range of 180-430 cm/d) and unsaturated (1.9-130 cm/d) water flow conditions were conducted. Two PHPPs were installed with orientations to yield water flow directions of 30° and 45°. In case of saturated flow condition, estimated  $J_x$  and  $J_y$  agreed well with measured water fluxes (less than 25 % relative errors), resulting in good estimations of water flow magnitudes and directions. In case of unsaturated flow condition, water fluxes estimated by PHPP with 30° agreed well with measured flux. However, one component ( $J_x$ ) from PHPP with 45° showed a constant discrepancy (-55 cm/d) in any flow rates. This result indicates that differences of constant resistance between sand and needle, heterogeneity of the sand-water-air system, and heterogeneity of microscopic unsaturated flow in measurement area resulting from water content changes (0.38 cm<sup>3</sup>/cm<sup>3</sup> for saturated flow to 0.10 cm<sup>3</sup>/cm<sup>3</sup> for unsaturated flow) affect PHPP estimations.

## Numerical simulation of wetting zones generated by artificial macropores

SUETSUGU, Atsushi<sup>1\*</sup>, MORI, Yasushi<sup>1</sup>

<sup>1</sup>Fclt Environ Sci & Tech, Okayama Univ.

### Introduction

Soil macropores have been recognized historically (e.g., Schumacher, 1864). Water retention characteristics of the macropores have been described quantitatively by using capillary pressure (e.g., Nelson & Baver, 1940), while transport phenomena through macroporous soils are still a research topic in geological science. Laminar flows in macroporous soils have been estimated by the dual-porosity model (Gerke & van Genuchten, 1993). Rapid flows in macroporous soils have also been characterized with non-destructive techniques for visualization of soil macropores (e.g., Capowicz et al., 2011), quantification of macropore volume (e.g. Nakashima & Kamiya, 2007), and quantitative evaluation of transport parameters for macropores (Elliot et al., 2010). As the tools for the assessment of soil macroporosity being developed, various efforts to utilize the natural processes generated by macropores are being carried out. Shipitalo and Gibbs (2000) suggested a method to dispose wastewater to soils through the network of earthworm burrows. Hirth et al. (2005) developed artificial biopores to introduce seedlings of ryegrass into soils. The authors developed an artificial macropore system to promote flows in subsurface soils. The artificial macropore has narrow (c.a. 1 cm) auger-holes filled with coarse fibrous materials (Mori, 2009). By filling the fibrous materials, erosion of the macropore walls is expected to be reduced. Rapid flows in macropores are moderated by the fillings to extend flow regions in the subsurface layers. The extended flow regions would be effective in leaching of soil contaminants, bioremediation, carbon sequestration, etc. To evaluate the wetting zones generated by the artificial macropores, a numerical simulation with Hydrus2D (PC-Progress, s.r.o.) was conducted at two types of rainfall intensity (2, 20 mm/hr) and three types of inclination (0, 5, 10 degree).

### Methods

A surface-crust loam soil was supposed for remediation with the artificial macropore. Hydraulic conductivity of the crust was set at  $5.56 \times 10^{-7}$  m/s (ca. 2 mm/hr). We supposed to use a blasted bamboo for the permeable filling. Saturated hydraulic conductivity of the filling was set at  $7.00 \times 10^{-3}$  m/s (obtained by the constant head method). To simulate overland flows with Hydrus2D, two types of approach were employed.

#### (1) Introducing a virtual layer for ponding water storage in Hydrus2D simulation

A virtual surface layer (Rassam et al., 2003) was set above the real soil surface. Saturated hydraulic conductivity of the layer was set at 5 m/s to avoid retardation of flows. A valley-like geometry was selected as an ideal site for the artificial macropore.

#### (2) Overland flow calculation with Hydrus2D

The overland flow module for Hydrus2D (Simunek, 2003; Kohne et al., 2011) utilizes the kinematic wave approximation of ponding water change with the empirical Manning hydraulic resistance. The Mannings roughness coefficient was set at 0.030 for forests with sufficient understory vegetation. Geometry of the system was simplified to a single slope for this approach. The hydraulic parameters were re-optimized to maintain water content at positive pressure values.

### Results & Discussion


At 20 mm/hr rainfall intensity, the artificial macropore generated a wetting zone around the macropore (Figure 1). For both of the valley system and the single slope system, the width of the wetting zones were ca.140 cm in the inclined (5 and 10 degree) lands. The artificial macropore system was less effective in the horizontal lands. No significant difference was given by installing the artificial macropore at 2 mm/hr rainfall intensity. Base on the results, appropriate spacing of the artificial macropores should be less than 140 cm for the crusted loam soils with moderate inclinations. Inclination enhanced infiltration through the artificial macropores, but precise estimation for more realistic geometries will be conducted with COMSOL software package.

Keywords: artificial macropore, Hydrus, carbon sequestration, leaching, wetting zone, numerical simulation

AGE04-P07

Room:Convention Hall

Time:May 20 17:15-18:30

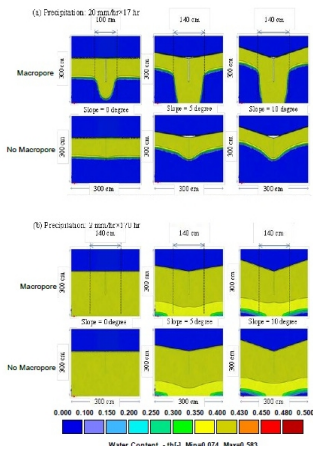

## The Effect of Artificial Macropores on the Amount of Organic Matters in soils

YAMAMOTO, Tetsuya<sup>1\*</sup>, MORI, Yasushi<sup>2</sup>, Morisawa Taihei<sup>1</sup>, Suetsugu Atsushi<sup>2</sup>

<sup>1</sup>Graduate School of Life and Environmental Science, Shimane University, <sup>2</sup>Graduate School of Environmental Science, Okayama University

### I. Introduction

Reclamation of impervious soils is desirable, because soil erosion by surface runoff may have unfavorable effects on environments (e.g. nutrient loss from soils, eutrophication of downstream lakes). In this study, we scrutinized the effect of an artificial macropore system, i.e., a technique for permeability control, on the amount of organic matters in soils.

### II. Experimental method

We installed the artificial macropores at an inclined site with red-yellow soil in Matsue Experimental Station of Shimane University, Japan. The adjacent plot without the artificial macropores was also monitored as a control plot. Total carbon (TC) and water content of soil samples, and ion concentration of infiltrated water samples were measured for both plots.

### III. Results and discussion

Temporal variation in TC of the soil showed a trend of slight reduction at the treated plot. Cumulative amount of  $\text{NO}_3^-$  in the infiltrated water was greater in the treated plot than the control, while that of  $\text{NH}_4^+$  was high in the control. The scatter diagram of  $\text{Cl}^-$  concentration of the infiltrated water versus cumulative rainfall during the interval of sampling suggested three categories of chloride dynamics (A, B, and C). At high cumulative rainfall, data from both the plots were laid in the same area (A) of the diagram. In contrast, when there was little rainfall, data from the treated and the control plot were classified into B and C, respectively. The gradient in the scatter diagram for B is similar to that of A, which indicates high efficiency of infiltration by the artificial macropores. Based on the results, we concluded that the artificial macropore system had promoted digestion of soil organic matter and leaching of  $\text{NO}_3^-$  through nitrification.

Keywords: environmental restoration, macropore, infiltration

## Assessment of VOCs Bioremediation Considering Microbial Inhabitation and Soil Environmental Factors

YOSHIKAWA, Miho<sup>1\*</sup>, TAKEUCHI Mio<sup>2</sup>, ZHANG Ming<sup>2</sup>, KOMAI Takeshi<sup>2</sup>

<sup>1</sup>Chemical Grouting Co., LTD, <sup>2</sup>AIST

Volatile organic compounds (VOCs) like tetrachloroethene (PCE) and trichloroethene (TCE) spread throughout the fields in Japan, which causes significant problem of soil and water pollution. PCE and TCE are biotic or abiotic decomposable pollutant. In recent years, bioremediation, purification method utilizing microbial metabolism, has become a remarkable technique due to its low-cost and environmental friendly points.

PCE and TCE can be entirely decomposed to ethen only by *Dehalococcoides*, through dichloroethene (DCE) and vinyl chloride (VC); *Dehalococcoides* is key microbes for the bioremediation. Inhabitation of *Dehalococcoides* in polluted sites is essential for in-situ bioremediation, especially biostimulation, while the distribution of the microbes and the environmental factors constraining microbial activities have not been elucidated.

To investigate the *Dehalococcoides* inhabitation and environmental factors like soil organic carbon, undisturbed cores including sandy and clayey soils were taken from several polluted sites. The cores were divided by soil texture, and the microbes and the factor items in the divided samples were analyzed.

The factor items were categorized into some groups related to anaerobic conditions, energy source, nutrients, osmotic pressure, and so forth. As an example, soil organic carbon was considered to affect appropriate anaerobic conditions, energy source, and nutrients during reductive bioremediation. The feasibility of the bioremediation was assessed based on a series of experimental data and considerable affecting items.

Keywords: VOCs, *Dehalococcoides*, Bioremediation, Environmental factor, Soil organic carbon

## Advances in and Limitations Associated with In-Situ Bioremediation of Chlorinated Solvents

ZHANG, Ming<sup>1\*</sup>, YOSHIKAWA, Miho<sup>2</sup>, TAKEUCHI, Mio<sup>1</sup>, KOMAI, Takeshi<sup>1</sup>

<sup>1</sup>AIST, <sup>2</sup>Chemical Grouting Co., LTD

Chlorinated solvents, like perchloroethene (PCE) and trichloroethene (TCE), have been widely used by many industries, especially in developed countries like Japan. Because of their wide applications, lack of proper regulation, poor handling, storage and disposal practices in the past, chlorinated solvents have become a type of the most prevalent contaminants for soil and groundwater pollution. In recent years, the environmental concern and interest is growing for bioremediation of such chlorinated solvents, commonly called VOCs in Japan, in soil and groundwater including aquatards. Research works in the recent decades have demonstrated 3 types of biodegradation resulting in degradation of VOCs.

In this presentation, the 3 types of bioremediation, specifically reductive dechlorination, cometabolism and direct oxidation together with some recent advances in bioremediation are overviewed. The overview presented the current research trend in understanding the mechanisms of biodegradation with regard to in situ applications, including potential application to aquatards. Limiting factors in bioremediation are examined from biochemical, geochemical and hydro-geological aspects. In addition, the fusion of technologies that could be used to enhance or accelerate the bioremediation are discussed and proposed.

Keywords: Biodegradation, VOCs, Reductive Dechlorination, Cometabolism, Direct Oxidation, Limiting Factors

## Development of evaluation method on soil pollution by luminous bacteria -Effects of elution components of soil-

SUGITA, Hajime<sup>1\*</sup>, Takeshi Komai<sup>1</sup>, Yukari Imoto<sup>1</sup>

<sup>1</sup>AIST, Japan

Recently, a lot of soil pollutions with heavy metals or volatile organic compounds have been found in many parts of the world. The soil pollution survey and the countermeasure are required socially. The bioassay with luminous bacteria is becoming the center of attention as a simplified detection technique or an acute toxicity evaluation method on pollutants.

However, the constituents of the soils other than the pollutants shall be dissolved in the extracts. Therefore the evaluating the influence of elution components of soil is essential for applying adequately the bioassay method.

In this study, it focuses attention on alkali metal, alkali earth metal, general anions and Al, Si, Fe dissolved components as main components which will elute from soils. We report the effects of the above components on the luminescence intensity of luminous bacteria.

Keywords: bioassay, luminous bacteria, soil pollution evaluation method, soil elution components

## Heavy Metal Removal in Landfill Leachate Using Agricultural Waste Materials: A Case Study in Sri Lanka

Nadeeka Sewwandi Badabadde Gamage<sup>1\*</sup>

<sup>1</sup>Graduate student

Heavy Metal Removal in Landfill Leachate Using Agricultural Waste Materials: A Case Study in Sri Lanka

M. I. M. Mowjood<sup>2</sup>, Meththika Vithanage<sup>3</sup>, Ken Kawamoto<sup>1</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, Japan

<sup>2</sup>Department of Agricultural Engineering, University of Peradeniya, Sri Lanka

<sup>3</sup>Chemical and Environmental Systems Modeling Research Group, Institute of Fundamental Studies, Sri Lanka

Abstract

Open dumping of Municipal Solid Waste (MSW) is a common practice and identified as a source of pollution for surface and groundwater resources in Sri Lanka. The objective of this study was to identify the heavy metals in leachate and soils in the vicinity of MSW dump site and to assess locally available agricultural waste materials to use as adsorbents to remediate heavy metals from polluted water. Coconut husk (CH) and saw dust (SD) was used as the adsorbents in the column and field experiments. The influent solutions were introduced from the bottom of the column using a submersible pump. Field experiment was carried out in the selected MSW landfill using concrete cylinders with 0.3 and 3 m in diameter and length, respectively. These were filled with CH and SD. Cadmium and Lead concentrations were measured in influent and effluent with time. Cadmium and Lead was found to be the most critical heavy metals in landfill leachate which possess quality rating scales of 620% and 108% based on the general standards for portable water. Removal efficiencies of both Cd and Pb by CH and SD were >85% at the beginning and decreased with time until the equilibrium is achieved in column experiment. In contrast, at the field, average removal efficiencies of them were >50% which could be due to the presence of other ions, and large particle size and variable concentration of heavy metal in the field. Hence, these agricultural wastes have potential to mitigate heavy metal pollution and more studies are needed to optimise the effective removal and to increase the efficiency of CH and SD.

Key words: coconut husk, dumping site, heavy metals, leachate, saw dust

Keywords: coconut husk, dumping site, heavy metals, leachate, saw dust



## Contamination of wetlands through transport of pollutants generated from the municipal solid waste open dumpsite, Kandy,

WIJESEKARA, Hasintha<sup>1</sup>, Meththika Vithanage<sup>1</sup>, Nadeeka Sewwandi Badabadda Gamage<sup>1\*</sup>

<sup>1</sup>Institute of Fundamental Studies, Kandy Sri Lanka

Nalin de Silva<sup>2</sup>, and B.F.A. Basnayake<sup>3</sup>

<sup>2</sup>Geological Survey and Mines Bureau, Dehiwala, Sri Lanka

<sup>3</sup>Department of Agricultural Engineering, Faculty of Agriculture, University of Peradeniya, Sri Lanka

Landfill leachate is well reported as a contaminant source polluting surface and ground water. Since the predominant waste disposal method still in Sri Lanka is open dumping which leads to generate significant amount of leachate mostly to nearby water sources. Gohagoda open dump site is one such location at the world heritage city, Kandy, in Sri Lanka. This leachate directly flows to the Mahaweli River which is the main water source for entire province due to absence of proper lining system or any treatment mechanism before disposal. Hence, this study was focused on characterization of leachate generated from Gohagoda dumpsite, assess their spatial and temporal variations, identify subsurface canals and perched water bodies in the wetland system affected by the leachate flow.

Leachate samples were collected monthly for one year from different points of the leachate drainage channel and tested for quality parameters as pH, temperature, EC, TDS, TS, VS, TSS, VSS, BOD<sub>5</sub>, COD, alkalinity, hardness, nitrates, phosphates, ammonium nitrogen, chloride and heavy metals (Fe, Mn, Zn, Cu, Pb, Ni and Cr). Moreover, 1D and 2D modes of resistivity data were collected from Vertical Electrical Sounding (VES) at the abandoned paddy field at the downstream of the dumpsite, towards the Mahaweli River.

Results demonstrated average values of pH 8.37, BOD<sub>5</sub> 380 mg/L and COD 1835 mg/L. Nitrate and phosphate seemed to range between 1-765 mg/L and 2-258 mg/L and high levels were observed towards wet season exceeding the allowable limits for wastewater discharge. Some heavy metals were reported in high concentrations such as Zn, Pb, Ni, Cu, Cd and Cr in average concentrations of 0.3710, 0.217, 0.207, 0.135, 0.092 and 0.061 mg/L respectively. Concentrations were decreasing with the distance from the landfill. Leachate characteristics indicated that the leachate is in the methanogenic phase. VES results revealed that the depth to the bedrock is about 3-5m and bedrock is plunging towards the river with a gentle slope. Further, few subsurface canals were found in the abandoned paddy field area and the leachate flow is mainly confined to the near surface. In addition, no perched water pockets were observed and that may be due to the continuous flow in the subsurface. The results strongly suggest that the leachate generated from Gohagoda dumpsite may pollute the soils and waters in the close by wetland systems and the drinking water sources. The geophysical findings can be effectively used to obtain an understanding of the subsurface flow and transport of the leachate from open landfills without landfill liners.

Keywords: Landfill leachate, subsurface canals, Chemical oxygen Demand

## EFFECT OF SINGLE-SPECIES SALT SOLUTIONS ON GEOTECHNICAL PROPERTIES IN BENTONITE

Hafiz Muhammad Awais Rashid<sup>1\*</sup>, KAWAMOTO, Ken<sup>1</sup>, HAMAMOTO, Shoichiro<sup>1</sup>, KOMATSU, Toshiko<sup>1</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, <sup>2</sup>Institute for Environmental Science and Technology (IEST), Saitama University

The importance of bentonite in engineered barrier systems is well recognized. This naturally occurring clay has unique properties of swelling on contact with water and very low hydraulic conductivity to liquids. In addition to these, its high cation exchange capacity (CEC), large specific surface area and ability of self-healing has made it a necessary component for the liner system of the modern engineered landfills. However, leachate produced in the landfill due to the biodegradation of waste can react with bentonite chemically and may affect its engineering characteristics. The increase in hydraulic conductivity can cause leachate to enter subsurface and pollute the subsurface environment including ground water table. On the other hand change in liquid limit is an indicative of change in other geotechnical properties including shear strength and swelling behavior of bentonite. Therefore, it is necessary to analyze the effect of chemicals present in landfill leachate on geotechnical properties in bentonite.

This study investigated the individual effect of such chemicals using single-species salt solutions of different cations, concentration and valance on the liquid limit and hydraulic performance of bentonite. A total of thirteen solutions including de-ionized water and three different solution concentrations (0.01M, 0.1M, and 1M ) of four major exchangeable cations  $\text{Na}^+$ ,  $\text{K}^+$ ,  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$  were used in this study.

Liquid limit tests were carried out using all the thirteen type of solutions on sodium bentonite. It was observed that liquid limit decreases with increase in salt concentration. At very high and very low concentrations, both monovalent ( $\text{Na}^+$ ,  $\text{K}^+$ ) and divalent cations ( $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ ) showed similar liquid limit. However, there is a large difference in liquid limit values for monovalent and divalent cations at intermediate concentrations. Effect of concentration and valance on hydraulic conductivity of bentonite was analyzed using different concentrations of NaCl and intermediate concentrations (0.1M) of all the four cations. It was observed that both concentration and valance have little effect on hydraulic conductivity of bentonite. The results suggested that hydraulic conductivity is likely to be highly controlled by the effective porosity and effective void ratio of bentonite. The tests were run upto 100 days to investigate the effect of time on hydraulic performance of bentonite and it was observed that hydraulic conductivity does not change significantly with time.

Keywords: Bentonite, Hydraulic Conductivity, Liquid limit, Landfill leachate, Effective void ratio, Effective porosity

## Sorption of heavy metals on soil and colloidal solutions and transport facilitated by soil colloids

NAZIR, Mazhar<sup>1\*</sup>, KAWAMOTO, Ken<sup>1</sup>, KOMATSU, Toshiko<sup>1</sup>, HAMAMOTO, Shoichiro<sup>1</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University

Heavy metals are amongst various contaminants that are released daily in the soil environment as a result of various anthropogenic activities. Soil has the ability to immobilize contaminants like heavy metal ions and sorption is a major process for the retention of heavy metals in soils. However, mobile colloids have strong ability to sorb inorganic (heavy metals, radionuclides etc.) and organic contaminants and transport these contaminants to deeper depths or groundwater. The sorption of heavy metals on soil and colloidal solutions, and transport of heavy metals facilitated by soil colloids were investigated by batch sorption and column transport experiments respectively. Batch sorption experiments of heavy metal, (Cu), were performed on red-yellow soil and colloidal solutions (<1 micro meter size) generated from the red-yellow soil at natural pH and low pH conditions. The results showed that at high concentration range of Cu (10 to 200 mg/L), the sorption capacity ( $K_d$ ) of Cu for the soil was greater than low concentration range (0 to 10 mg/L) and high  $K_d$  values were obtained at natural pH conditions. Similarly, sorption capacity ( $K_d$ ) of Cu for colloidal solutions was greater at high concentration range of Cu and natural pH conditions. However, the  $K_d$  values for colloidal solutions were much higher; 10 to 50 fold more than for the red-yellow soil. Therefore, the colloidal solutions have greater sorption affinity for Cu than soil. In column transport experiments, the colloidal fractions played a significant role in transporting Cu and almost 76% of the total applied Cu was transported by soil colloidal fractions. The mobility caused by coarse colloidal fractions (0.2-1 micro meter size) was greater, as 85 % of the total leached Cu was associated to coarse colloidal fractions. Analysis of soil after the column leaching test indicated depth dependent phenomena of Cu distribution in the soil. Therefore, this study concludes that soil colloids play an important role in facilitating heavy metal (Cu) transport through soil which may lead to contamination of groundwater.

Keywords: Sorption, Heavy metal ( Cu), Soil, Colloidal fractions, Sorption capacity, Transport

## Characterization of organic carbons orienting on the surface of water repellent soils

HIRADATE, Syuntaro<sup>1</sup>, KAWAMOTO, Ken<sup>2\*</sup>

<sup>1</sup>National Institute for Agro-Environmental Sciences, <sup>2</sup>Saitama University

Water repellency of soils has been observed in various soil types such as sandy, loamy, clayey, peaty, and volcanic ash soils. Water repellency can have a range of soil hydrological consequences such as reduction of infiltration rates, acceleration of surface runoff and erosion, and occurrence of fingering flow. Therefore, proper managements of the water repellent soils are important for optimizing sustainability and productivity of farming system. In the present study, two water repellent soils were collected from a brown forest soil in Aichi Prefecture and an allophanic volcanic ash soil in Fukushima Prefecture, and the surface orientation of organic carbons on the water repellent soils were characterized by measuring pulse saturation transfer magic angle spinning (PSTMAS) <sup>13</sup>C nuclear magnetic resonance (NMR) and cross polarization magic angle spinning (CPMAS) <sup>13</sup>C NMR spectra. In PSTMAS spectra, mobile portions of organic carbons are intensified when comparison is made with CPMAS spectra. This phenomenon was confirmed by measuring PSTMAS and CPMAS spectra for silica particle coated with octadecyl group and its mixture with dimethylsulfoxide. In the PSTMAS spectra of two repellent soil samples, it was clearly shown that the peaks at around 12 and 23 ppm were intensified, indicating that the intensified carbons are highly mobile and located on the most outer surface of the soil particles. Judging from the chemical shift values of the NMR spectra, the intensified carbons were assigned as aliphatic carbon chains, such as  $-(CH_2)_nCH_3$ . In conclusion, at least a part of aliphatic chain would present on the most outer position of the water repellent soils, and they would prevent wetting and water penetration in the soils.

Keywords: Nuclear magnetic resonance, NMR, Water repellent soils, Surface orientation, soil organic matter, soil organic carbon

## Colloidal ferrihydrite retards the appearance of Pu on the Earth's surface

TSUKIMURA, Katsuhiko<sup>1\*</sup>, SUZUKI, Masaya<sup>1</sup>, SUZUKI, Yohey<sup>2</sup>, MURAKAMI, Takashi<sup>2</sup>

<sup>1</sup>AIST, <sup>2</sup>The University of Tokyo

Radioactive wastes from nuclear power plants must be disposed of safely. A large amount of Pu in the wastes is sorbed to colloidal ferrihydrite and moves in groundwater. This paper describes the behavior of Pu sorbed to colloidal ferrihydrite in nuclear waste disposal sites. When the concentration of ferrihydrite is higher than  $10^{-5}$  mol Fe /L, most Pu is sorbed to the ferrihydrite. Ferrihydrite persists in groundwater as long as nitrate is present. When the filtration effect of geologic media is small, the gravity moves colloidal ferrihydrite to deep underground; the velocity is 0.12 m/year when the size of ferrihydrite is 70 nm. When the filtration effect is large, ferrihydrite is not transported further. In both the cases, ferrihydrite retards the appearance of Pu on the Earth's surface.

Keywords: colloid, ferrihydrite, plutonium, transport of radionuclides, gravity effect, sorption

## Effect of water content on the soil water repellency for Japanese and New Zealand volcanic ash soils

KURODA, Takuya<sup>1\*</sup>, SUBEDI, Shaphal<sup>1</sup>, KAWAMOTO, Ken<sup>1</sup>, Karin Muller<sup>3</sup>, B.E. Clothier<sup>4</sup>, Syuntaro Hiradate<sup>5</sup>, HAMAMOTO, Shoichiro<sup>1</sup>, KOMATSU, Toshiko<sup>1</sup>

<sup>1</sup>Graduate School of Science and Engineering, Saitama University, <sup>2</sup>Institute for Environmental Science and Technology, Saitama University, <sup>3</sup>Plant & Food Research Institute, Ruakura Research Centre, East Street, Hamilton 3240, New Zealand, <sup>4</sup>Plant & Food Research Institute, Private Bag 11600, Palmerston North 4442, New Zealand, <sup>5</sup>Biodiversity Division, National Institute for Agro-Environmental Sciences (NIAES)

Water repellency (WR) of soil can induce significant hydraulic problem such as reduced water infiltration, enhanced surface runoff and erosion and the forming of preferential flow patterns in soils. Soil water repellency is reported in many parts of the world at different climatic conditions and soil types. Although WR has been observed in many countries including Japan and New Zealand, relatively few studies evaluated WR of aggregated volcanic ash soils. In the present study, the effects of water content on the water repellency of Japanese and New Zealand volcanic ash soils at different depths were investigated. Secondly, the time dependency of the contact angle in these soils at different water contents was evaluated. The degree of water repellency of the moisture content adjusted samples was assessed with the sessile drop method (SDM), the molarity of ethanol droplet (MED) test and the water drop penetration time (WDPT) test. The degree of WR varied considerably by region and depth. For the Japanese volcanic ash soils, the contact angle increased sharply with increasing water content, reached the maximum contact angle at water contents around 0.3 cm<sup>3</sup>/cm<sup>3</sup>, and then gradually decreased to 0° at field water content. A similar pattern was found for the New Zealand volcanic ash soils. However, the contact angle of the New Zealand volcanic ash soils was greater than 100° at field water content. Directly measured contact angles using the SDM were in good agreement with indirectly obtained contact angles using the MED test. The contact angle sharply decreased with soil-water contact time in volcanic ash soil samples at higher water contents.

Keywords: soil water repellency, volcanic ash soil, sessile drop method, water droplet penetration test, molarity of ethanol droplet test

## Evaluation of management practices in agricultural and forest lands by the multiple-frequency electromagnetic surveying

MIYAMOTO, Tamami<sup>1\*</sup>, MORI, Yasushi<sup>2</sup>, Hiroaki Somura<sup>1</sup>, IDE, Jun'ichiro<sup>3</sup>, SUETSUGU, Atsushi<sup>2</sup>

<sup>1</sup>Graduate School of Life and Environmental Science, Shimane University., <sup>2</sup>Graduate School of Environmental Science, Okayama University., <sup>3</sup>Finnish Forest Research Institute, Finland

### 1. Introduction

Agricultural and forest lands are the possible sources of pollutant load to aquatic environments, because those lands account for large proportion of basin areas. We had successfully evaluated pollutant load from non-point sources by sampling and analyzing river water or subsurface drainage. If a large-scale soil survey is also possible, the estimation of pollutant load could be confirmed by elucidating the processes relevant to the pollution. However, the cost in time and labor for soil survey restricts opportunities of surveying large areas. The multiple-frequency electromagnetic surveying system (MFEM) enables non-destructive measurements of soil electrical conductivity profiles. The purpose of this study is to develop a procedure for efficient soil survey with the MFEM. We applied this technique to evaluate the effects of management practices in agricultural and forest lands on the soil properties. The main test sites were at Oki-islands in Shimane Prefecture, Japan. Most of the island surfaces are covered with forests, and the forests are considered as an important watershed protection area.

### 2. Experimental methods

We investigated nine sites at Oki-islands with a MFEM system (GEM-2, Geophex, US) on 30, 31 August, 2010. The scanned data were mapped by referring location data from a GPS device. The frequencies of the MFEM measurement were 47970, 24510, 7950, 3870 and 2310 Hz. Destructive analysis on soil moisture, electrical conductivity and soil temperature were also conducted by using a soil sensor (Stevens Water Monitoring Systems, Inc., US) at several plots in each site. Total carbon content of the surface soils were also measured by the dry combustion method.

### 3. Results and discussion

We could distinguish the sites by referring electrical conductivity data around surface of the soils. Electrical conductivity data at surface soils obtained by the MFEM were well correlated with those by the conventional sensor. The data were not perturbed by total organic carbon of the soils. Therefore, in this study, soluble salts could be selectively measured by the MFEM system.

By considering management practices in the investigated sites, we found higher electrical conductivity at the sites with delayed tree thinning. The delayed tree thinning had reduced understory vegetation, hydraulic conductivity of surface soil, and thickness of organic layer. The reduced understory vegetation and soil permeability would have remained soluble salts at the soil surfaces. It was also found that some of the forest sites that have been used as farmlands remained greater amount of soluble salts in the soils.

### 4. Summary

The MFEM system could evaluate vertical and horizontal distribution of soil electrical conductivity efficiently. By comparing the mapped data, the effects of management practices and land use history on the surface soils could be found. It was confirmed that the immediacy of MFEM technique are useful in the preliminary investigation for large areas.

Keywords: Electromagnetic sounding, land management, forest

## Grain size analysis by laser diffraction particle size analyzer.

MORISAWA, Taihei<sup>1\*</sup>, Mori Yasushi<sup>2</sup>, Kaneko Nobuhiro<sup>3</sup>

<sup>1</sup>Faculty of Life and Environmental Science, Shimane University, <sup>2</sup>Graduate School of Environmental Science Okayama University, <sup>3</sup>Graduate School of Environment and Information Science, Yokohama National University

Grain size analysis is one of the test methods of soil physical property that has been showing many research progresses. General experimental methodology of grain size analysis is determined with reference to Japanese industrial standards (JIS). But this methodology requires great effort and long time in case of carrying out many experiments. In this study, soil grain size was analyzed using laser diffraction particle size analyzer (LDPSA). Through the results, expediency of LDPSA was examined for soil grain size analysis. In the results, there were differences in the amount of fine soil grain in soil samples between JIS methodology and LDPSA methodology. Additionally, fine soil grain increased with decrease in total carbon in the soil samples. Maybe because of soil aggregate was loosed with decrease in TC. With all these factors, it was found that it was difficult form comparison of the results between JIS methodology and LDPSA methodology. However, LDPSA proved useful in transition analyses of same samples.

Keywords: Laser Diffraction Particle Size Analyzer, Grain size analysis, Soil organic matter



## Input rate of sublacustrine gas into Lake Nyos (Cameroon, West-Africa) inferred from diffuse CO<sub>2</sub>-flux measurement and hy


ISSA, Issa<sup>1\*</sup>, Issa Issa<sup>1</sup>, Yoshida Yutaka<sup>1</sup>

<sup>1</sup>Tokai Univ. Dept. Chem., Sch. Sc

Because of its importance to understand the mechanism and the origin of the mid 1980s fatale exhalation of gas, mainly magmatic carbon dioxide (CO<sub>2</sub>) from Lake Nyos, on one hand, and on the other hand, for the sake of preventing and management of future gas explosion related hazards in Nyos area, the hydrothermal system of the lake was extensively investigated over the last quarter the century with the objective to quantify CO<sub>2</sub> recharge rates and determine the feeding paths. More than 25 years after the catastrophe which killed 1734 people in the North-West Region of Cameroon, we revisit the question which remains of primary importance with regards with the extraordinarily high rate of gas build-up observed soon after the gas disaster. Based on results of diffuse CO<sub>2</sub> measurement (CO<sub>2</sub>-flux) surveys we conducted in January 2009 and information on the hydrological system, input rate from hydrothermal system was estimated at 258.4 (0.7) Mmol/yr. The value estimated above using a mass balance equation  $CO_{2in} = CO_{2acc} + CO_{2flux}$ , (where  $CO_{2in}$ ,  $CO_{2acc}$  and  $CO_{2flux}$  stand for inputs from hydrothermal system, accumulation rates and diffuse CO<sub>2</sub> loss respectively) implies about 42.6 (0.3%) of gas supplied from beneath the lake accumulates to constitute the time bomb. If we compare the gas rate and the ground water input rate at depth below 50 m of 9 l/sec estimated from hydrological observations, the ensuing gas-

rich water would attain a concentration of 0.9 mol/l implying 136% saturation (e.g saturation level of 0.630 mol/l maximum) at system pressure (210 m depth). We believe that the high gas-rich water supply type model which was more or less accepted for past several years is incompatible with observations above because of the plumes gas oversaturated waters may generate. Instead, we advocate for a diffusional type model in which gas is supplied in the form of pure CO<sub>2</sub> distributed throughout sediment/water interface where the specific flux would be 23 micromol/sec/m<sup>2</sup>. The view complements well the absence of horizontal anomalies (gas is evenly distributed) as suggested by several transect profiles of the lake. Else, this study permits distinguish between the recharge rate (=accumulation rate) which relates to time required for the event to repeat itself and the input rate related to activity of sublacustrine system.

Keywords: CO<sub>2</sub>-flux, Lake Nyos, gas exhalation, time bomb



## Measurement of pore velocity by using LAT-PIV, and parameter estimation of CTRW

ARAYA, Itsuki<sup>1\*</sup>, TAJIMA, Shuhei<sup>1</sup>, HATANO, Yuko<sup>1</sup>

<sup>1</sup>Graduate School of Systems and Information Engineering, University of Tsukuba

In recent years, the problem of soil pollution has been concerned in Japan. Soil pollution has some problems. For example, while soil pollution is close to us, but we could hardly to feel the pollution itself. Furthermore, the remediation of ground requires enormous costs and long time. This is the reason why we have to predict and take measures in early stages.

Recently CTRW (: Continuous Time Random Walk) model has been widely attempted to predict the behavior of substances in the groundwater. This model can describe the anomalous diffusion that it is difficult for ADE (Advection-Dispersion Equation) to describe. However, in the CTRW model, it is one of the most difficult problems that the model parameters cannot be fixed a priori.

In this study, we proposed a method to estimate the parameter A of CTRW by using the LAT-PIV (Laser Aided Tomography-Particle image velocimetry) method. LAT-PIV is a method that can visualize the internal structure of porous medium, and the behavior of tracers in fluid. We packed the glass beads of 2mm-5mm and 5mm-10mm in the clear plastic box (10 cm in length, 10 cm in width, 40 cm in height), and then filled the acryl box with silicone oil and tracer particles. Silicone oil is poured with the pomp at constant flow velocity, and razor sheet is irradiated to the plastic box from the side. We can hereby observe the internal behavior of porous medium. We conducted experiments and obtained the histogram of the pore velocity in the porous medium. After that, we calculated the value of A from the shape of histogram.

In this computer program which outputs pore velocity, the pore velocity is calculated by comparing two continuous visualized images. In this process, every image is divided into 1536 parts (48 by 32 parts) and the pore velocity is calculated at each grid. At this time, each grid searches the grid where tracers moved.

However, we found two problems in this process. When searching the exact grid where tracers moved, some unexpected pore velocities are calculated because the glass beads are distributed in various places. To avoid calculating these abnormal velocities, we improved this computer program. The glass points are shown by black pixels in images. We replaced these black points with red pixels that shows pore fluid. Because of this improvement, we succeed in reducing some unexpected pore velocities.

Another problem is that the zero velocity is calculated at the almost black grid (showing almost glass beads), which does not actually show the behavior of tracer particles. To make this computer program not to calculate such zero velocity, we set a certain threshold value. Because of this improvement, each grid became be able to decrease the zero velocity one tenth in comparison with the original.


As a result of analyzing the images by using improved algorism, we obtained some pore velocity distributions. From the pore velocity distribution, we estimated the value of A. When we used the glass beads of 5mm-10mm, the value of A was 0.635, and when we used the glass beads of 2mm-5mm, the values of A were 0.979 and 0.916. From this result, we found that the size of glass beads influences the value of A, on the contrary, the flow rate is not related to the value of A.

Keywords: soil pollution, anomalous transport, continuous time random walk, heterogeneity, PIV, porous medium

AGE04-P22

Room:Convention Hall

Time:May 20 17:15-18:30

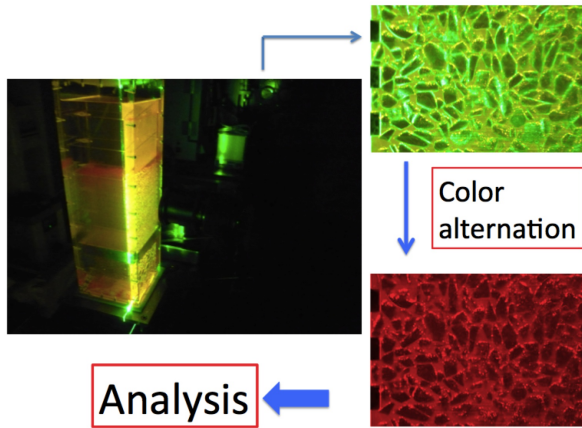

## Study of the aboveground hydrological processes in an unmanaged coniferous forest

SUN, Xinchao<sup>1\*</sup>, ONDA, Yuichi<sup>1</sup>, Kyoichi Otsuki<sup>2</sup>, Takami Saito<sup>2</sup>

<sup>1</sup>Faculty of Life and Environmental Sciences, University of Tsukuba, <sup>2</sup>Kasuya Research Forest, Kyushu University

Through field observations we monitored the hydrological processes by measuring gross precipitation (P), throughfall (TF), stemflow (SF), transpiration (Et) and evaporation (Ef) in the Japanese cypress plantation forest floor throughout the 2011 wet season (June-October) in Karasawa Mt., Tochigi Prefecture, Japan. Previous studies have shown the different hydrological components separately. However the interaction of each and every component as a system has not been investigated in one unit. Therefore, in this study, individual components of the hydrological processes were quantified and below ground water storage was estimated by water mass balance equation. Field measurements and hydrograph analysis showed that of the 882.2 mm of cumulative gross precipitation generated by 30 rainfall events during the study period, throughfall, stemflow, and interception loss accounted about 70.6% (622.8 mm), 11.4% (100.7 mm), and 18.0% (158.7 mm), respectively. 82.0% (723.5 mm) of cumulative gross precipitation reached the forest floor, while 16.2% (152.3 mm) was lost through transpiration and 13.1% (123.1 mm) was evaporated from forest floor. According to water mass balance equation, below ground water storage was about 50.7% (447.5 mm), which composed of almost half of cumulative gross precipitation, in other words, 49.3% (434.7 mm) of gross precipitation were consumed in the unmanaged Japanese cypress forest. Daily stand transpiration varied from 0.09 to 2.53 mm day<sup>-1</sup> with a mean value of 1.48 mm day<sup>-1</sup>, and daily evaporation loss from forest floor spread from a minimum value of 0.26 mm day<sup>-1</sup> to a maximum value of 3.7 mm day<sup>-1</sup> with a mean value of 1.2 mm day<sup>-1</sup>. Thus, in the unmanaged and dense Japanese cypress plantation forest, the following water loss order can be identified: canopy interception > transpiration > forest floor evaporation. This implies that through forest management and correcting the canopy density, it is possible to improve the ground water capital and water storage capacity of the entire forest watershed.

Keywords: Precipitation, Throughfall, Stemflow, Transpiration, Evaporation, Japanese cypress

## Process-based modeling of chemical weathering: A step to reduce model complexity

NOZU, Taichi<sup>1\*</sup>, TAJIKA, Eiichi<sup>2</sup>

<sup>1</sup>Dept. EPS, Sch. Sci, Univ. Tokyo, <sup>2</sup>Dept. Complex. Sci. Eng., Univ. Tokyo

Riverine export of major and minor elements to the oceans plays an important role in global biogeochemical cycles. Understanding the response of riverine export to environmental changes over various time- and spatial-scales is therefore essential for prediction of future changes in riverine chemistry including nutrients and pollutants.

Although quantification of chemical weathering rates has been recognized as one of the most important challenges to understanding the Earth system, there remain two scientific and technical problems to be resolved: a significant discrepancy between field- and laboratory-scale weathering rates and computational load for integration of process-based weathering models to large scale climate models such as general circulation models.

A new process-based chemical weathering model was developed to examine possibilities of a reduction of the computational load without losing its ability to reproduce riverine major ion concentrations. We applied the model with full complexity (i.e. vertically one-dimensional heat, moisture, gas, and solute transport and dissolution/precipitation of all minerals) to three different small watersheds to verify the model to reproduce major ion concentrations of modern streams. Then, we reduced model complexity by removing its vertical dimension and/or reducing the number of minerals to be considered. We will present sensitivity of the model results to the reductions of model complexity, and discuss how such process-based weathering models can be applied to environmental studies.

Keywords: chemical weathering, process-based modeling, stream chemistry

## Estimating soil hydraulic properties obtained from evaporation and multi-step outflow experiments

ASADA, Kei<sup>1\*</sup>, SAITO, Hirota<sup>2</sup>, YOSHIKAWA, Seiko<sup>1</sup>, Sadao Eguchi<sup>1</sup>

<sup>1</sup>National Institute for Agro-Environmental Sciences, <sup>2</sup>Department of Ecoregion Science, Tokyo University of Agriculture and Technology

Inverse modeling using data from transient experimental methods such as multistep outflow (MSO) method and evaporation (EVP) method are frequently used for estimating unsaturated soil hydraulic parameters. However, comparisons between different inverse results obtained from MSO and EVP methods are scarce in the literature, especially for organic-rich soils with low bulk density, e.g. Andosol. The objective of this study was to determine and compare unsaturated hydraulic properties of Andosol from data collected using both methods. Undisturbed soil core samples (5.0 cm in i.d. and 5.1 cm in height) were taken from soil at a depth of 0-5 cm. The packed soil samples were also used for the experiments. After the MSO method, the same soil core samples were saturated again for the EVP method. The MSO method yielded a set of pressure heads ( $h_{MSO}$ ) or cumulative water outflow ( $Q_{MSO}$ ) vs. time while the EVP method obtained a set of pressure heads ( $h_{EVP}$ ) or cumulative water flux ( $V_{EVP}$ ) vs. time. A one-dimensional model based on Richards' equation, HYDRUS-1D (ver.4.14), was then used to analyze data to estimate soil unsaturated hydraulic parameters. The unknown parameters were accomplished by minimizing the objective functions which described the differences between observed and estimated  $h_{MSO}$ ,  $h_{EVP}$ ,  $Q_{MSO}$  and  $V_{EVP}$ , respectively. The results could be important in determining the agreement of soil hydraulic parameters obtained from both experiments and provide more precise and accurate characterization of water and solute transport.

## Applicability of Ground Penetrating Radar for investigation of vadose zone in arid land

SEIICHIRO, Kuroda<sup>1\*</sup>, Mitsuihiro Inoue<sup>2</sup>, Takayuki Kawai<sup>2</sup>, SAITO, Hirotaka<sup>3</sup>, Yusuke Yoshida<sup>3</sup>, Masayuki Watanabe<sup>4</sup>, Yuji Takeshita<sup>5</sup>, Tomohiro Oka<sup>5</sup>

<sup>1</sup>National Institute for Rural Engineering, <sup>2</sup>Tottori University, <sup>3</sup>Tokyo University of Agriculture and Technology, <sup>4</sup>Shizuoka Prefecture, <sup>5</sup>Okayama University

We evaluate the applicability of Ground Penetrating Radar(GPR) for characterization of subsurface structure and groundwater in arid land, which control the transport phenomena of water and solute transport in vadose zone.

We conducted the field test in the fields of Arid Land Research Center, Tottori university, using the GPR system with shielded antennas of dominant frequencies, 100,200,400,500,900,1.5GHz. Soil type in the field is almost uniform sand, and water content of soil is around or lower than 5%. Then soil is considered to be lossless media in electric magnetic sense. Penetration depth of each antenna is deeper than values usually reported. For example penetration depth of the system with 100MHz antennas is considered to be in the range from 20 to 30m.

We visualize 3D subsurface structure using the 100 MHz antenna. The obtained image shows the distribution of ground water table and layer which seems volcanic ash seam in sand and will control water recharge process in vadose zone.

Keywords: Ground Penetrating Radar (GPR), Vadose zone, Subsurface structure, Arid land

## Predicting Soil CO<sub>2</sub> dynamics in the vadose zone of Andisol in Western suburb of Tokyo

KATO, Chihiro<sup>1\*</sup>, NISHIMURA Taku<sup>1</sup>, IMOTO Hiromi<sup>1</sup>, MIYAZAKI Tsuyoshi<sup>1</sup>

<sup>1</sup>University of Tokyo

Soil retains two to three times more carbon (C) than the atmosphere dose<sup>1)</sup>. To simulate the soil CO<sub>2</sub> dynamics, the effects of soil respiration on C storage, which is sensitive to soil temperature and moisture, must be evaluated quantitatively. Model investigations of soil CO<sub>2</sub> dynamics have been conducted mainly for forest soils. Recently, C capture and storage by soil has been recognized as a function of agricultural field, and capacity of C storage in arable land has been discussed. For example, compost application to agricultural field has been attempted to increase C storage in soil. The objective of this study is to predict soil CO<sub>2</sub> dynamics in the arable land using HYDRUS<sup>2)</sup>.

For model validation, continuous monitoring has conducted at Institute for Sustainable Agro-ecosystem Services of the University of Tokyo (ISAS) in western suburb of Tokyo. The soil of 0 to 35 cm under the surface was Kuroboku andisol, and below it to 100cm, Tachikawa loam andisol was distributed. A 10 m square bare area was prepared for study site. Soil moisture and temperature at eight depths and soil CO<sub>2</sub> concentration at three depths were measured every 20 minutes from Jul. 2010 to Sept. 2011. CO<sub>2</sub> efflux from the surface was measured with closed chamber method in both summer and winter. Meteorological data was obtained from ISAS and AMEDAS station located in Fuchu city, near the field.

In the simulation, considering the vertical distribution of dry bulk density and soil texture, simulation area was divided in three layers i.e. cultivated, hardpan and Tachikawa loam layer, respectively. Durner-Mualem model<sup>3)</sup> was employed for soil hydraulic function and parameters were determined by inverse analysis with evaporation method<sup>4)</sup>. Volumetric water content at saturation  $Q_s$  is an important parameter to predict diffusion of CO<sub>2</sub> through air filled pores in a variably saturated soil. In this study, porosity of the field soil was employed as  $Q_s$ . Chung and Horton<sup>4)</sup> model was used for soil thermal conductivity. Parameters for CO<sub>2</sub> production were referred to Buchner et al.<sup>5)</sup>.

Simulation of soil CO<sub>2</sub> dynamics, including CO<sub>2</sub> production and transport, was conducted using HYDRUS-1D from 1st Jan. 2010 to 30th Sept., 2011. In the model, since CO<sub>2</sub> production rate is affected by soil moisture and temperature, HYDRUS first simulates the soil water and heat transport and then production and transport of CO<sub>2</sub> are predicted.

Initial conditions (I.C.s) were determined with preliminary calculation from 1st Jan. to 31st Dec., 2010. Boundary conditions (B.C.s) for water movement were hourly observed rainfall and daily evaporation rate which had been calculated with meteorological sub model of HYDRUS. Separately calculated soil surface temperature using meteorological data and energy balance equations were given for thermal B.C.. Atmospheric CO<sub>2</sub> concentration was applied for B.C. of CO<sub>2</sub>. The final results of the preliminary calculation were employed as I.C.s for exact numerical simulation. Then simulated values were compared with monitored data for model validation.

The model could describe well the daily and seasonal variation of soil moisture, temperature and CO<sub>2</sub> concentration. Predicted CO<sub>2</sub> concentration at the hardpan layer was higher than other layers because of the small diffusivity of dense hardpan layer. This phenomenon had been observed in other field where hardpan layer existed<sup>6)</sup>. Predicted cumulative CO<sub>2</sub> flux for a year was also comparable to the value which was estimated with observed data. HYDRUS could simulate the soil CO<sub>2</sub> dynamics in arable land well.

References 1)Sundquist, 1993, Science, 934-941; 2)Simunek et al., 2008, Vadose Zone J. 7:587-600 3)Durner, 1994, Water Resour. Res, 30:211-223 4)Chung & Horton, 1987, Water Resour. Res. 23:2175-2186 5) Buchner et al., 2008, J. of Hydrol., 361, 131-14 6)Fujikawa et al., 2000, Trans. JSIDRE, 225, 111-118

Keywords: Soil CO<sub>2</sub> dynamics, Field monitoring, Numerical simulation



## Ecosystem Modeling for a Temperate Grassland Wind-Erosion Scheme

BANZRAGCH, Nandintsetseg<sup>1\*</sup>, Masato Shinoda<sup>1</sup>

<sup>1</sup>Arid Land Research Center, Tottori University, Japan

Temperate grasslands are significant or potentially significant source for dust emission; however, detailed relationships among dust emission and characteristics of grasslands, in particular the special roles of vegetation and grazing are not well documented. Moreover, existing dust models do not have sufficient capability in modeling vegetation growth and decay, which play a major role in temperate grassland aeolian processes. In this study, we assessed the grassland ecosystem model (DAYCENT) for its capability to provide estimations of vegetation dynamics under different grazing conditions in order to incorporate into a temperate grassland wind-erosion scheme. DAYCENT model was parameterized with the field experiment data (soil physical/chemical properties, vegetation and grazing) at the Bayan Unjuul (BU) site in 2010-2011. BU is located in north of the most frequent dust outbreak region in Mongolia. The results from the model have been validated 8-years (2003-2010) plant phytomass (Live, dead, and litter) and species, and soil data obtained at the grazed and un-grazed areas at the BU. Generally, the model performed reasonably well in simulating seasonal and interannual variations in the observed plant production. However, some discrepancies may be due to the fact that the model does not consider year-to-year changes in plant species composition. It is important to note that the model could simulate realistically the effect of grazing on grasslands and vegetation memory, which suppressed dust outbreaks. Therefore, this model will provide a useful tool for dust emission study in temperate grasslands.

Keywords: Temperate grasslands, Ecosystem modeling, Integrated Wind-Erosion Scheme, Dust emission, Vegetation