

Nutrient transport and surface water-groundwater interaction in the tidal river of a coastal megacity in Japan

Shin-ichi Onodera^{1*}, Mitsuyo Saito², Yuta Shimizu¹, Masashi Yoshikawa¹, Koki Onishi¹

¹Integrated Sciences, Hiroshima University, ²Ehime University

In coastal megacities, severe groundwater depression and water pollution occurred. These impacts affected to river environment change. Especially, the river mouth area has been deposited the polluted matters. These areas have characteristics of water level fluctuation which causes river water-groundwater interaction and the associated change in dynamics of nutrients. However, these effects on the nutrient transport in tidal reaches and nutrient load to the sea have not been fully evaluated in previous studies. Therefore, we aimed to clarify the characteristics of the nutrient transport with the river water-groundwater interaction in the tidal river of Osaka metropolitan city. We conducted the field survey from the river mouth to the 7km upstream area of Yamato River, which has a length of 68km and a watershed area of 1070 km². Spatial variations in radon (²²²Rn) concentrations and the difference of hydraulic potential between river waters and the pore waters suggest that the groundwater discharges to the river channel in the upstream area. In contrast, the river water recharged into the groundwater near the river mouth area. It may be caused by the lowering of groundwater level associated with the excess abstraction of groundwater in the urban area. The result also implies the seawater intrusion would accelerate the salinization of groundwater. The spatial and temporal variations in nutrient concentrations indicate that nitrate-nitrogen (NO₃-N) concentrations changed temporally and it negative correlated with dissolved organic nitrogen (DON) concentrations. Inorganic phosphorous (PO₄-P) concentrations showed the increasing trend with the increase of the river water level. Based on the mass balance, nutrient reproduction from the river bed was suggested in tidal reach. That was estimated to be 10 % of total nitrogen and 3% of phosphorus loads from the upstream.

Keywords: nutrient transport, surface-groundwater interaction, megacity, radon

Effect of variation in the nutrient supply from terrestrial area on the coastal seaweed cultivation in the Hiuchi-Nada

Mitsuyo Saito^{1*}, Shin-ichi Onodera², Genki Hidaka³, Minoru Tokumasu⁴, Koki Onishi², Yuta Shimizu²

¹JSPS PD, Ehime Univ., ²Grad. School of Hiroshima Univ., ³Hiroshima Univ., ⁴Saijo city

Bad harvest of the seaweed (nori) is one of the recent severe problems in the Seto Inland Sea. In order to evaluate the factors influence on the seaweed cultivation, relation between the variation of the nutrient supply from terrestrial area and seaweed yield was examined for the last 40 years in the coastal area of Hiuchi-Nada in Seto Inland Sea. We also examined the effect of nutrient supply by submarine groundwater discharge.

Fluvial transport of nutrients along the river-to-ocean continuum in the Fuji River watershed

Iwata Tomoya^{1*}, Hayato AOYAMA²

¹University of Yamanashi, ²Hokkaido University

Riverine transports of nitrogen and phosphorus from watersheds can be an important flux that impacts the integrity of downstream and coastal ecosystems. Therefore, numerous nutrient-transport models have been developed to predict the nitrogen and phosphorus flux from lands to the oceans, but these models have paid rather less attention to the nutrient uptake from water column by stream communities. Recent empirical studies have increasingly identified that aquatic communities in river networks uptake and/or mineralize the large amount of river-borne material leaking from terrestrial ecosystems. However, the uptake rates of nitrogen and phosphorus by aquatic communities in the entire area of a river network from headwater streams to downstream rivers to estuary has remained unknown, especially in mountainous watersheds with high relief, such as watersheds in Japan. We developed the nutrient transport models that explicitly incorporate stream ecosystem metabolism in order to understand the roles of stream ecosystem function (i.e., nutrient uptake) in controlling the nitrogen and phosphorus flux to the coastal ecosystems.

We performed a field sampling campaign covering the whole area of the Fuji River watershed, central Japan, during September and October in 2010. In each of 107 study streams/rivers, we measured stream discharge, total nitrogen (TN) and total phosphorus (TP) concentrations, as well as other physico-chemical attributes. We then developed the modified version of spatially referenced process-based model (SPARROW) to predict the observed flux of nitrogen and phosphorus in the entire area of the Fuji river networks. The models describe phosphorus and nitrogen yields from watershed sources, terrestrial processes during their transports from the sources to rivers, and aquatic processes during their fluvial transports from upstream to downstream rivers. In the models, we formulate the aquatic processes as kinetic equations of stream metabolism, which depends on water temperature, photosynthetically active radiation, and/or substrate concentration.

The best predictive models revealed that rice paddies and orchards yielded the largest amount of TN and TP among the various landscape types, with the specific discharges both accounting for 46% and 66% of nitrogen and phosphorus exports from the watershed, respectively. Moreover, landuse affected the nutrient uptake by stream communities; the estimates of areal uptake rates were significantly higher in agricultural and urban streams than forested streams. However, our model also revealed that although stream metabolism was accelerated in highly impacted streams, the estimates of uptake velocity (v_f) of nitrogen and phosphorus atoms from the water column were greatly decreased, implying the decrease of nutrient removal efficiency in these stream ecosystems.

The areal uptake rates were summed to calculate the basin metabolism of nitrogen and phosphorus in this river network. Those estimates showed that stream ecosystem can uptake the large amount of nitrogen (25t/d) and phosphorus (0.3 t/d), both contributing the 78% of nitrogen and 44% of phosphorus yields from the watershed sources. These results showed that the Fuji river network controls the nitrogen and phosphorus delivery to the coastal ecosystems. We argue that the management actions that do not consider the maintenance of stream ecosystem function may be insufficient for the controls of nutrient transports along the land-to-river-to-ocean continuum.

Keywords: Drainage networks, spiral metrics, nutrients, basin metabolism

Estimation of phosphorus budget in coastal lake using mass balance model and sediment core profile data

Guangzhe Jin^{1*}, Shin-ichi Onodera¹, Yuta Shimizu¹, Mitsuyo Saito², Atsuko Amano³

¹Hiroshima University, Japan, Graduate School of Integrated Arts and Science, Japan, ²Ehime University, Japan, Center for Marine Environmental Studies, ³Institute of geology and Geoinformation Geological Survey of Japan ,AIST

In order to understand the processes of phosphorus retention and export in a eutrophic coastal artificial lake in western Japan, we estimated the phosphorus budget by the sediment nutrient data and a mass balance model approach from 1980 to 2008. The phosphorus flux from inflowing rivers is highest in summer period from June to August which contributes the 43% of annual average P input and is lowest at 9% in winter period from December to February. The phosphorus retentions determined by mass balance calculations were lower than those calculated from sediment total phosphorus concentrations and sediment accumulation rates. The mass balance results show around 400 tons of phosphorus was trapped in the lake from 1980 to 2008. Meanwhile the sediment core data shows the accumulation is about 3 times higher than that. It suggests that phosphorus release from sediment which was affected by the severe lake eutrophication in the 1970s contributed to the recent phosphorus cycle in the lake. The mass balance results suggest the phosphorus is trapped in the lake in all seasons except winter. The dominant period is in spring from March to May, which contributes an average of 57% of the annual average trapped phosphorus. The annual phosphorus trapped in lake calculated by the mass balance model has been decreasing from around 15 g m⁻² year⁻¹ in 1980 to around 0 in 2008. This result shows the decreasing trend of the nutrient flux into the lake, especially after the 1990s. However, core profile result shows a slightly increasing trend with variations up to 6 g m⁻² year⁻¹ in 2008. These different trends suggested the recovery of hyper eutrophication and high level of phosphorus recycle in lake is still continuing.

Effect of climate change on flood events as major driver of nutrient transportation in a suburban watershed

Yuta Shimizu^{1*}, Shin-ichi Onodera¹

¹Graduate School of Integrated Arts and Sciences, Hiroshima Univ.

This research aims to confirm the effect of climate change on flood events as a major driver of nutrient discharge. It was confirmed that small-scale flood events have decreased and extreme flood event has increased in western Japan. This trend leads that study catchment has advanced to polarization which has relatively low flows in base flow period and high flows in flood events. Accordingly, the capability of nutrient transportation during base flow condition has decreased. While amount of nutrient has accumulated inside of the catchment during drought period, large amount of nutrient will be transported in first flood event. It is like the first flush phenomenon on urban hydrology. It was confirmed that the mean N:P ratio of the catchment has been increased in recent decade. Although changes of human activities might be one of the reasons, it was suggested hydrologic changes also affected.

Keywords: nutrient transport, climate change, flood, drought, SWAT model

Factor analysis and classification of dissolved iron concentrations of Japanese rivers

Takeo Onishi^{1*}, Kaori Sakuma², Ken Hiramatsu¹, Shinichi Nishimura¹, Muneoki Yoh³, Atsushi Masaki³

¹Faculty of Applied Biological Sciences, Gifu University, ²Midac Co. Ltd., ³Graduate School of Agriculture, Tokyo University of Agriculture and Technology

Recent studies showed that dissolved iron transported through rivers may be an important source of iron in oceans. In cold and sub-cold regions, it has been found that wetlands which form reductive condition and accumulate un-decomposed organic materials are the main source of dissolved iron. However, it is unknown whether these findings can be applicable to watersheds in temperate regions such as Japan. Thus, in our study, we conducted statistical analysis to extract main factors governing dissolved iron concentrations of 408 points in Japanese 45 Rivers ranked as primary rivers and to classify them into several groups. We executed multiple regression analysis using climate conditions (annual precipitation and annual average temperature), topographical conditions (slope), geological types (5 categories), soil types (12 categories), and landcover types (10 categories) as explanatory variables of dissolved iron concentrations. The minimum parameter set providing the best fitted regression line was selected according to AIC values. In addition, for the classification of rivers, combined use of principal component analysis and cluster analysis was applied.

Result of multiple regression analysis reveals that while soil types such as gley soil, peat soil, and grayish lowland soils have a positive effect on dissolved iron concentration, landcover types such as building and golf course, soil type such as brownish lowland soil, and annual average temperature have a negative effects. Through multiple regression analysis, we succeeded to extract factors consistent with previous studies. Moreover, temperature and golf course are newly extracted but reasonable factors. By using extracted factors, we attempted to classify rivers into several groups and construct dissolved iron production curves. We need validation of obtained curves through applying them to regions with various geographical conditions.

Keywords: dissolved iron, landuse change, multivariate statistics

Geochemical characteristics of groundwater and its flow system in Miyagi Prefecture

Harue Masuda^{1*}, Ayaka Matsuyama¹, Kohei Yoshimoto¹, Shigeshi Fuchida¹, Kaoru Watanabe¹, Katsuki Okabayashi¹, Yusuke Katsuki¹, Fumie Chikaoka¹, Shinji Nakaya², Shuto Aoki², Phan Hoang Minh Ha², Tsuyoshi Shintani², Ryo Hirasawa², Reo Ikawa³, Atsunao Marui³, Teruyuki Maruoka⁴

¹Osaka City University, ²Shinshu University, ³AIST, ⁴Tsukuba University

Major and minor element chemistry, stable isotopes (H, O, S), and radiogenic Cs (134 and 137) were analyzed for of ca. 200 groundwaters and 30 river waters taken from Miyagi Prefecture from the March to November 2012 to evaluate the groundwater quality at present and draw groundwater flow system in and around Sendai Plain, which was surrounded by high mountains in the northern and western end and facing to the Pacific Ocean at the east. Sendai Plain can be divided into northern and southern plains by Matsushima hill, and two large rivers run in the basins of each plain; Kitakami and Naruse rivers in the northern plain, and Natori and Abukuma rivers in the southern plain.

Groundwater chemistry is different in between the northern and southern plains. In the northern plain, diluted Na-Cl type shallow groundwater (spring water and groundwater from <10 m depth) and riverwater are found in the high mountainous and hilly areas, indicating that the groundwaters of this area are not chemically immature and residence time would be short to react with the soils and sediments to dissolve the salts. Dilute Ca-HCO₃ type shallow groundwaters are found in the plain basin as results of evolution of the water chemistry. In the southern plain, Ca-HCO₃ type water appears in the high mountain area, and Ca and HCO₃ concentrations become higher in the hill and inland basins. The groundwaters in the southern plain seem to be more mature than those in the northern plain. Along the coast, where Tsunami covered the ground in the 11th, March, 2011, seawater contaminated into the shallow Ca-HCO₃ type groundwaters. The highest Cl concentration was 14000 mg/L, however, most of the seawater contaminated groundwaters contained ~500 mg/L Cl. S isotope of sulfate ions also suggests the contamination of seawater. Deep groundwater (>10 m depth) occasionally gives Na-HCO₃ type chemistry. Also, high Na-Cl type chemistry occurs in the deep groundwaters in Sendai of the southern Plain and Ishinomaki in the northern plain. Those would be results of salinization due to excess use or fossil seawater. Thus, the groundwater aquifers >10 m depth from the surface are commonly at stagnant condition in the studied area.

Hydrogen and oxygen isotopes of groundwater become smaller from east to west along NS direction, parallel to the coast and mountains, in the southern plain, however, such a variation is not prominent for the groundwaters in the northern plain. The isotope ratios of groundwater change corresponding to the sampling sites but not depths, indicating small catchments of the deep groundwater in the studied area.

Contamination of toxic elements such as As is found from shallow and deep groundwaters. Some of them are presumed to originate the oxidation of As-bearing pyrite in the Neogene aquifer sediments. As contaminated groundwater can be found in the groundwaters from Tsunami affected area, although the relationship of seawater and/or sediments carried by Tsunami to As contamination is not clear at present.

Radiogenic Cs was not detected from the all samples analyzed here, thus, the accident at Fukushima Daiichi nuclear power plant would not cause contamination of radionuclides in the studied groundwater at present.

Keywords: groundwater contamination, aquifer, Tsunami, radiogenic Cs, O, H, S stable isotopes, As

Traceability of SF₆ and CFCs for Groundwater Flow in Matsumoto Basin, Japan

Shinji Nakaya^{1*}, Hideto Aoki¹

¹Shinshu University

Chlorofluorocarbons CFC-12, CFC-11, CFC-113 and sulfur hexafluoride SF₆ are primarily of anthropogenic origin, while SF₆ also occurs naturally. Groundwater dating by CFC-12, CFC-11, CFC-113 and SF₆ is carried out in Matsumoto basin, central Japan, consisting of Quaternary sediments, in complex land use. CFCs and SF₆ concentrations are extremely over record (EOR) in 40 % and 10 % in sampling points of the well waters, respectively. CFC-113 in EOR comes from industrial areas, indicates the source of SF₆ in EOR in groundwater can be separated from industrial pollution of groundwater by CFC-113. CFCs in EOR must reflect the vertical infiltration of anthropogenic CFCs polluted surface waters in the basin. NO₃-N is also likely to increase with the concentration of CFCs in EOR. The relationship between concentrations SF₆ (Csf₆) and CFC-12 (C12) indicates that groundwater flow can be explained as 'piston flow model' in shallow and deep aquifers in Matsumoto basin and that CFC-12 of three groundwaters are decomposed under DO <1.0 and pH >8. Although isotopic ratios of oxygen and hydrogen indicate that the source areas of groundwaters are mountains side of 1,500 m (a.s.l.) and highland of 800 m (a.s.l.) surrounding basin, the SF₆ and CFCs tracers suggest that vertical infiltration of groundwaters from surface to well depth occurs within the basin. It is modeled that many recharged waters at mountain side move to the basin via river system and recharge again within sedimentary basin. Using SF₆ tracer, average residence time of groundwaters ranges from 4 years to 37 years.

Keywords: groundwater, dating, SF₆, CFCs

Water and Nutrients Dynamics in and around Eucalyptus Forests. Part 2

Norio Tase^{1*}, Shin-ichi Onodera², Tsutomu Yamanaka¹, Kenji Tamura¹, HAYASHI, Hisayoshi¹, Takaaki Nihei³, TAKIZAWA, Sachika¹, Seongwon Lee¹, HIRATA, Ricardo⁴, SARAIVA, Fernando⁴, TERADA, Rafael⁴, SHIROTA, Ricardo⁴

¹University of Tsukuba, ²Hiroshima University, ³Hokkaido University, ⁴University of Sao Paulo

Brazil is the biggest eucalyptus forestation country in the world, and 0.6% of a country or 3,500,000 ha is eucalypt forest already. Though there have been several studies reporting environmental impacts of eucalyptus plantation such as over-uptake of water and nutrition, biodiversity loss, volatilized or emitted harmful substances, in Brazil salient issues have not occurred. At first, this project evaluates scientific backgrounds and finds threshold conditions to environmental mal-impacts.

Based on verifying environmental functions of eucalyptus such as uptake of over excessed or contaminated nitrate from groundwater and soil erosion control, sustainable crop producing systems with coupling with eucalyptus plantation in land-use sequences could be proposed.

The study site, Rio Claro, is located 35km north of Piracicaba, Sao Paulo State of Brazil, where sugar cane field and eucalyptus forest are set out sequentially. Piracicaba area is covered by silty sand layers on the undulating peneplain. The annual mean temperature is 21.4 degree C., and average annual precipitation is 1279mm. The year of 2012 has an average annual rainfall though there was quite little rainfall in July through October. The stands of the eucalyptus are about 5 years old and their heights are around 15m. Sets of monitoring wells with 3 to 8 m-depth were installed, and groundwater chemistry is analyzed and water levels are surveyed regularly.

Water chemistry of groundwater, spring water and river water around the study site have relatively less minerals and nutrients, groundwater in the sugar cane fields are affected a little by fertilization, that is relatively high nitrate concentration.

This is partly supported by Grants-in-Aid for Scientific Research, Scientific Research(B) of JSPS, which is very appreciated..

Keywords: Eucalyptus, Land-use sequences, Groundwater contamination, Environmental conservation, Brasil

Nitrate leaching in Andisol field under different organic matter management

Sadao Eguchi^{1*}, ASADA, Kei¹, IWATA, Yukiyo², KOGA, Nobuhisa²

¹National Institute for Agro-Environmental Sciences, ²National Agriculture and Food Research Organization Hokkaido Agricultural Research Center

Organic matter management in agricultural soils should affect not only the soil carbon accumulation but also the nitrate leaching to below the crop root zone. This presentation shows the monitoring results about the influence of different organic matter management systems in relation to the crop residue incorporation, cattle manure compost (CMC) amendment, and timing of CMC amendment in Andisol fields with loamy or sandy-gravel subsoils.

Migration of radiocaesium in forests with water flow through canopy, litter layer, and mineral soil

Masahiro Kobayashi^{1*}, Yasuhiro Ohnuki¹, Yoshiki Shinomiya¹, Toshihide Hiruta²

¹Forestry and Forest Products Research Institute, ²Fukushima Prefectural Forestry Research Centre

After the accident of the Fukushima Daiichi Nuclear Power Plant, a huge amount of radionuclides deposited over a wide range in Japan. In forested area, radiocaesium which has long half-life, first trapped mainly at the canopy and the litter layer, then will move to the mineral soil. The objective of this study is to clarify the migration of radiocaesium in forests with water flow through the canopy, litter layer, and mineral soil.

Throughfall (TF), litter leachate (LL), and soil water (SW) were collected in forested catchments in Ibaraki and Fukushima prefectures. The sampling plots were located in a conifer plantation in Ibaraki, and conifer plantation and deciduous secondary forest in Fukushima. Radiocaesium (Cs-134, Cs-137) of the water samples were measured by the gamma-ray spectroscopy using germanium detectors. The radioactivity measurements were made essentially without filtrations.

The concentrations of Cs-137 of the TF collected at the Ibaraki site in March and April 2011, immediately after the accident, were 14 - 60 Bq/L while the LL in the same period showed the concentration less than 10 Bq/L. A large proportion of deposited radiocaesium was thought to be trapped and held in the litter layer in the early stage after the accident. Then the concentration of TF and LL both increased in summer and decreased in winter.

In the Fukushima site, in which the sampling started from 2012, the radiocaesium concentrations (Cs-134, Cs-137) of TF and LL also tended to increase in summer. In late July, the concentration of LL from conifer plantation has once exceeded 100 Bq/L. This sample contained a noticeable amount of suspended particulate matter, and the radiocaesium concentration markedly decreased to 3 Bq/L after filtration.

The radiocaesium concentrations for SW samples were all under detection limit, suggesting strong capture of caesium by the mineral soil.

Keywords: Forest, Radiocaesium, Water flow, Litter layer

Phosphate oxygen isotopes as a tool to trace phosphorus sources and cycling in a watershed

Abigail Cid^{1*}, Uham Song¹, Ichiro Tayasu¹, Jun-ichi Okano¹, Hiroyuki Togashi², Naoto F. Ishikawa¹, Aya Murakami¹, Takuya Hayashi³, Tomoya Iwata³, Ken-ichi Osaka⁴, Shin-ichi Nakano¹, Noboru Okuda¹

¹Ctr Ecol Res, Kyoto Univ, ²Field Sci Educ Res Ctr, Kyoto Univ, ³Dept Ecol Syst Engineer, Univ Yamanashi, ⁴Univ Shiga Pref

Introduction

Phosphorus (P), which is an essential element for all of life on the earth, often limits the productivity of aquatic ecosystems, especially of freshwater ecosystems, because of its scarcity relative to other macronutrients. In contrast, modern anthropogenic P loadings have caused serious eutrophication and deteriorated ecosystem services all over the world, stimulating social needs for studies on P cycling. Although identification of the primary P sources can provide useful information for designing the best ecosystem management practices to control eutrophication, standard methods have not yet been established because P-involved chemical processes are complicated and P has no stable isotopes as natural tracers. With traditional P transport models, for instance, we have difficulty in estimating the relative contribution of P loadings from a variety of sources. Recently, however, a new isotopic technique has been developed to measure oxygen isotope ratio of dissolved inorganic phosphate ($d^{18}O_p$), which distinguishes different phosphate sources and also reflects the degree of phosphate turnover by organisms.

Here we apply the phosphate oxygen isotope analysis to a synoptic survey to identify natural and anthropogenic P sources and evaluate its relative importance to biological P recycling in the Yasu River, the largest tributary river of the Lake Biwa Watershed.

Materials & Methods

We collected river waters in October 2012 from 36 sites across the mainstream of the Yasu River and its branches, whose catchment areas greatly vary in land use pattern. We also collected water samples from 8 sewage treatment plants, 2 agricultural waste water plants and 1 livestock farm as potential point sources of anthropogenic P. A concentrated liquid phosphate fertilizer which is commonly propagated for agricultural purposes in this region was provided by a fertilizer manufacturer and evaluated as an indicator of agricultural non-point P source. Furthermore, we collected sands from the riverbed of 5 headwaters as natural P sources. The sand samples saturated with pure water were shaken at the ambient water temperature to naturally desorb dissolved inorganic phosphates. These samples were treated with magnesium-induced coprecipitation (MagIC) method for phosphate extraction and then converted to silver phosphate after purification through the sequence of resin separation and precipitation. We determined $^{18}O_p$ for each of these silver phosphate samples using a thermal conversion elemental analyzer coupled to a continuous flow isotope ratio mass spectrometer via a helium stream. The delta value was calculated as follows,

$$d^{18}O_p = (R_{sample} / R_{VSMOW} - 1) * 1000$$

where R_{sample} is the ratio of $^{18}O/^{16}O$ in our sample and R_{VSMOW} is the ratio of $^{18}O/^{16}O$ in the isotopic standard for oxygen, Vienna standard mean ocean water (VSMOW). The raw values were corrected by normalizing to internal working standards of silver phosphate, which have been calibrated to the VSMOW.

Results & Discussion

We detected significant differences in the $d^{18}O_p$ among a variety of potential P sources, showing this technique is applicable to trace P sources in the river ecosystems. River waters also showed a marked variation in their $d^{18}O_p$ among sites within the river. Based on an isotopic equilibrium model which assumes theoretical equilibrium of temperature-specific oxygen isotope exchange between dissolved phosphate and ambient water under rapid biological P turnover, we evaluated the relative importance of biological P recycling to external P loadings. Our data revealed that P is completely recycled by organisms in some sites while there is a surplus of P in other sites. We discuss how human density and land use pattern can affect P pollution and also what conditions increase the potential for biological P recycling in the watershed ecosystems.

Keywords: Biological recycling, Lake Biwa Watershed, Land use, Non-point source, Phosphate oxygen isotope analysis

Application of SWAT to the Sakura Riv. watershed. 2.Incorporation of irrigation & management operations into the model.


Seiko Yoshikawa^{1*}, Kei Asada¹, Saeko Yada¹, Takeshi Horio¹, Keiya Inao¹, Sadao Eguchi¹

¹National Institute for Agro-Environmental Sciences

To apply SWAT to agricultural watersheds in Japan, the comprehensive soil taxonomy polygon data and the SolphyJ (Agricultural soil profile physical properties database, Japan) were utilized as input data. To predict the water and nitrogen flow-out of Sakasa river, which is a sub-basin of Sakura River, SWAT simulation was done after input of parameters about daily irrigation, fertilizing, harvesting, and physical parameters relating river water flows.

As a first approximation, the predicted water flow was almost agreed with the measured one. On the other hand, the predicted nitrate nitrogen flow was a little larger than the measured one probably because of lack of denitrification in the ponded water above paddy fields.

Keywords: SWAT, irrigation channel, paddy field, agricultural management, comprehensive soil taxonomy

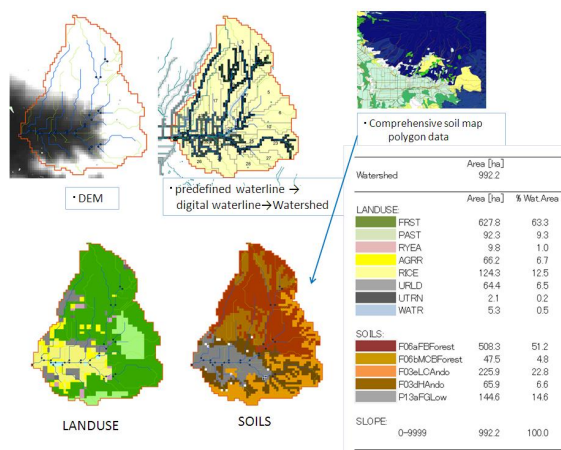

Estimating the groundwater contribution into a river situated in the alluvial fan of the Tedoru River

Shuhei Yoshimoto^{1*}, Takeo Tsuchihara², ISHIDA, Satoshi¹, SHIRAHATA, Katsushi¹, Masayuki Imaizumi¹

¹National Institute for Rural Engineering, NARO, ²Secretariat of Agriculture, Forestry and Fisheries Research Council, MAFF

Groundwater resources should be managed from the viewpoint of sustainable water use, and on the other hand, protection of biodiversity is also important. Water cycle in alluvial fans provides benefit to human activities as well as aquatic biodiversity, and hence it is required to understand the interactions between surface water and groundwater in alluvial fan areas. In this study, groundwater contribution into the Yasumaru River, a small river situated in the base of the alluvial fan of the Tedoru River, was illustrated with radon (²²²Rn), water temperature and electrical conductivity (EC) of the river water.

Water flowing in the Yasumaru River and groundwater in wells around the Yasumaru River were sampled five times (May, July, September, November and December) in 2012, at the points shown in Fig. 1. Water temperature and EC were measured in situ, and ²²²Rn concentration was determined by analyzing toluene-extracted samples with a liquid scintillation counter.

Distributions of the measured temperature, EC and ²²²Rn are shown in Fig. 2. In general, concentration of ²²²Rn is usually mentioned as an indicator of groundwater. Zones with raised ²²²Rn concentrations in river water are compatible with areas where groundwater discharge occurs.

In the upstream part of the Yasumaru River, the uppermost point with ²²²Rn of > 1.0 Bq/L varied with the seasons, Y28 in July and Y24 in November, which suggests that the upper end of the area of groundwater discharge could fluctuate. The mobility of the groundwater-discharge area seemed to be related to irrigation in paddy fields around the upstream part, because July is in the irrigation period and November is in the non-irrigation period. Additionally, the fact that ²²²Rn was higher than 1.0 Bq/L at Y28 in December is not contradictory to the suggestion about the irrigation-groundwater relationship, because the paddy fields were waterlogged by much snowfall and rainfall.

In the downstream part, ²²²Rn concentrations were drastically changed with the seasons, due to open/close condition of the floodgate lying between the upstream and downstream parts. Zones with higher EC were found, which was likely caused by inflow of high-EC effluents from the surrounding area. In addition, because the downstream area is situated in a residential area, rainwater collected by drainage ditches could come directly into the river.

Fractions of groundwater contribution into the Yasumaru River were estimated by the measured ²²²Rn concentrations and water temperatures. The maximum fractions of groundwater contribution (in May, July, September, November and December, respectively) calculated by ²²²Rn were 6.1%, 11.7%, 12.9%, 7.2% and 25.5% for the upstream part, and 28.0%, 22.0%, 43.6%, 25.0% and 29.4% for the downstream part. Meanwhile, those calculated by water temperature were 15.6% in July and 60.3% in December for the upstream, and 42.7% in July and 61.6% in December for the downstream. The lower values of the contribution estimated by ²²²Rn were likely caused by underestimation due to decrease of ²²²Rn by sublimation and radioactive decay. Similarly, the estimation of groundwater contribution by water temperature had a fear of under-/over- estimation due to insolation and thermal equilibration with the air.

Keywords: radon, radioisotopes, environmental isotopes, water temperature, groundwater discharge, multifunctionality in agriculture

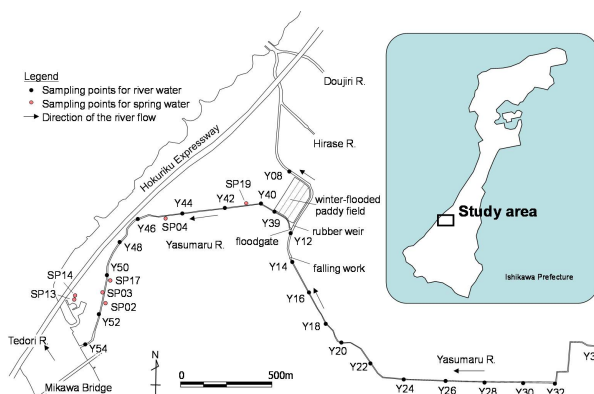


Fig. 1 (above-left) Sampling points of the study area.

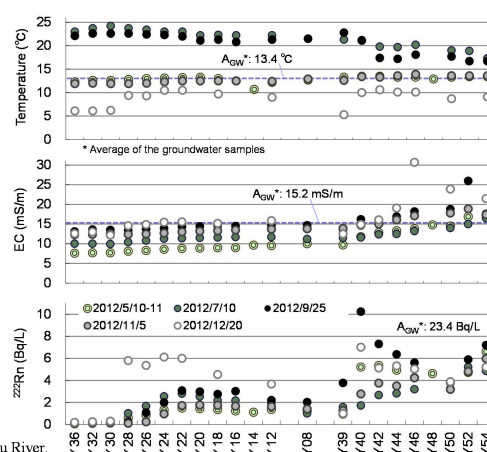


Fig. 2 (right) Distributions of water temperature, EC and ²²²Rn concentration along with the Yasumaru River.

Runoff analysis of the water resource from Odaigahara

Masanobu Taniguchi^{1*}, Ii Hiroyuki¹, Tatemasa Hirata¹

¹Wakayama University

The system to estimate an amount of water runoff using GIS data was developed. The water runoff was analyzed by the systems using GIS data with 100m mesh scale, precipitation data and flow rate data of rivers. The analysis system clears the amount of water runoff by the typhoon No.12. The Kino River flow is 498 million m³ per 8 days, and the Shinguu River is 1.6 billion m³, and the Miya River is 425 million m³. The amount of water runoff is compared by the value of observing station, and the accuracy of system is checked.

Keywords: Runoff analysis, Kii Peninsula, Typhoon, River flow, Outflow

AHW30-P05

Room:Convention Hall

Time:May 22 18:15-19:30

A control method for erosion along fence lines on sloping pastures by installing fences for controlling cattle behavior

Seiji Nakao^{1*}, Hiroyuki Sasaki¹

¹Institute of Livestock and Grassland Science,NARO

A control method for erosion along fence lines on sloping pastures by installing fences for controlling cattle behavior

Seiji Nakao

Institute of Livestock and Grassland Science,NARO

Keywords: sloping pasture, soil erosion, fence

Atmospheric deposition of radiocesium in forest sites on the periphery of the Kanto plain

Yuko Itoh^{1*}, Masahiro Kobayashi¹

¹FFPRI

TEPCO's Fukushima Daiichi Nuclear Power Plant (FDNPP) accident has resulted in emission of huge amounts of radioactive substances to the atmosphere. The radionuclides were transferred and influx as wet and dry depositions into the surrounding area. The objective of this study was to determine the atmospheric radiocesium (¹³⁴Cs, ¹³⁷Cs) depositions at forest sites on the periphery of the Kanto plain after the accident.

Bulk precipitation and throughfall samples were collected at 15 forest sites in Ibaraki, Gunma, Tokyo, Saitama, and Niigata prefecture. The sampling points were located between 120 to 250 km distances from FDNPP. Radiocesium (¹³⁴Cs, ¹³⁷Cs) of the dissolved fraction were measured by the gamma-ray spectroscopy with Ge detector. From all the samples collected during the period from 15 to 23 March 2011, radiocesium was detected. The total amounts of ¹³⁴Cs and ¹³⁷Cs depositions including this period by bulk precipitation ranged from 4,000 to 40,000 Bq m⁻², and those of throughfall ranged from 1,000 to 25,000 Bq m⁻².

The annual output of radiocaesium in stream water from a forested watershed

Yoshiki Shinomiya^{1*}, TAMAI Koji¹, KOBAYASHI Masahiro¹, OHNUKI Yasuhiro¹, SHIMIZU Takanori¹, IIDA Shinichi¹, NOBUHIRO Tatsuhiko¹, SAWANO Shinji¹, TSUBOYAMA Yoshio¹, HIRUTA Toshihide²

¹For. and For. Prod. Res. Inst., ²Fukushima Pref. For. Res. Ctr.

Radiocaesium (Cs) was released by the accident in Fukushima Daiichi nuclear power plant. Although the woodland is thought to have strong tendency to maintain radiocaesium within a forest ecosystem, there is an anxiety that radiocaesium flows downwards through stream water at the freshet because the terrain of mountain area in Japan is steep and a lot of rainfalls exist. Then, the behavior of radiocaesium in stream water in a forested catchment in Fukushima Prefecture was investigated. In this time, we report on the runoff of radiocaesium in 2012 and its feature.

The investigation was carried out in a small catchment in the Tadano experimental forest of the Fukushima Prefecture forestry research center in Koriyama city, Fukushima Prefecture (Annual rainfall 1163 mm ; drainage area 1.2 ha, the elevation 358 to 409 m, and the relief 0.42). The geology is a sedimentary rock (sandstone and tuff). As for the vegetation, the deciduous broad-leaved species such as *Quercus serratas* exists together with the Japanese red pine woods in the *Cryptomeria japonica* and the *Chamaecypari obtusa* plantation (about the 48 years old). The discharge was observed by setting up the v-notched weir and the water level gauge in the catchment end. The automatic water sampler was set up near the weir and collected stream water (volume; about 2L) every one hour when the freshet. The turbidity was measured by a turbidity sensor that was able to be installed in the automatic water sampler, and it was recorded every ten minutes automatically.

Based on 28 data of five freshets (March 23, 31, May 3, 28 and June 19 in 2012) of which the analysis had been completed, the relation between the turbidity and ¹³⁷Cs concentration in stream water were examined. Its relationship had high correlation ($r = 0.828$, $p < 0.001$). From this relation, turbidity and discharge, ¹³⁷Cs runoff for the observation period (267 days of March 20th - December 11th) was estimated as 183 Bq m⁻². We divided daily radiocaesium runoff data into two categories by daily rainfall (5 mm day⁻¹) and found that 84 % of ¹³⁷Cs discharged during the flood flow (> 5 mm day⁻¹). When converting ¹³⁷Cs runoff in the observation period into the yearly value (365 days), the estimated annual ¹³⁷Cs runoff became 250 Bq m⁻² yr⁻¹. This is about 0.3% of ¹³⁷Cs fallout around our site (80 kBq m⁻² by Ministry of Education, Culture, Sports, Science, and Technology; airplane monitoring 2011/10/13).

Keywords: forest, stream water, radiocaesium

AHW30-P08

Room:Convention Hall

Time:May 22 18:15-19:30

The runoff characteristic of radioactive Cs in the Hirose river basin, Fukushima prefecture

Tomijiro Kubota^{1*}, HAMADA, Koji¹, HITOMI, Tadayoshi¹

¹NARO, Institute for Rural Engineering

The runoff characteristic of radioactive Cs are studied in the Hirose river basin, Fukushima prefecture.

Keywords: radioactive Cs, runoff, Hirose river, L-Q equation

Pseudo Model for Phosphate Adsorption from Water onto Different Adsorbents

Osama Eljamal^{1*}, Junya Okawauchi¹, Kazuaki Hiramatsu¹

¹Laboratory of Water Environment Engineering, Kyushu University

Release of Phosphate from wastewater to resources of water constitutes the main risk for reduced water quality. At the same time Phosphate is an essential nutrient for all forms of life and can not be replaced by any other element. Current global reserves of Phosphate are expected to be exhausted in 50 years. Phosphate is mostly obtained from mined rock phosphate and there is a lack of alternatives to substitute it. Therefore, in this study the removal of Phosphate using different adsorbents was studied by conducting batch tests and kinetic adsorption model. The kinetic adsorption model was applied to predict the rate constant of adsorption based on pseudo equations. Thorough the investigation, pseudo first order and second order kinetic absorption model showed that the kinetic adsorption is consistent with the second order model from which it can be inferred that the mechanism of Phosphate adsorption is chemisorption.

Batch tests and kinetic adsorption models results showed that using the marble dust as adsorbent among other materials could be remove more than 93% of Phosphate from aqueous solution.

Keywords: adsorption of Phosphate, adsorption model, kinetic model, pseudo equation, batch Test

Relationship between catchment scale and the spatial variability of stream discharge and chemistry

Tomohiro Egusa^{1*}, Nobuhito Ohte¹, Tomoki Oda¹, Masakazu Suzuki¹

¹The University of Tokyo

We investigated whether the representative elementary area (REA) concept can be adopted in catchments with multiple geologies. REA was defined as a certain threshold size of catchment area above which spatial variability among small catchments becomes small and can be ignored. From the definition of REA, in the area above the size of REA, only some knowledge (minimum knowledge) of the underlying distributions is needed for continuum assumptions. For verifying the adoption of REA concept in meso-scale catchments with multiple geologies, we need to examine whether the spatial variability of discharge and chemistry can be explained by mixing based on geology percentages. We observed stream discharge at 65 points and water chemistry at 157 points in a 55 km² catchment that included multiple geologies. At observation points with uniform geology, stream chemistry became constant beyond about 1km² in granodiorite and volcanic rocks. The values to which stream chemistry converged were different between the two geologies. At observation points with multiple geologies, spatial variability remained large beyond a few square kilometers. SiO₂ and Mg²⁺ concentrations became constant above 10 km², but Ca²⁺ and electrical conductivity did not become constant until 55 km². Our calculation revealed that almost all observed variables were explained by mixture based on geological percentages, in 1-17km². However, above 17km², observed values were higher than calculated values. In regions with multiple geologies, the adoption of the REA concept with minimum parameter, geology, was confirmed at 1-17 km². However, above 17 km², our results indicated that the REA concept does not apply.

Keywords: spatial variability, stream water, catchment scale, water chemistry, bedrock geology, REA

A study of the quality of the water and the nitrogen isotope ratio of the groundwater in Kanagawa.

Yuji Miyashita^{1*}

¹Hot Springs Res. Insti. of Kanagawa Pref.

Introduction

As the technique of solving the cause of groundwater contamination by nitrate nitrogen, there is a method of using the nitrogen stable isotope ratio in groundwater. In this approach, it is a method to estimate the groundwater nitrogen origin from the difference of the nitrogen isotope ratio during artificial manure and domestic animal raw sewage, life drainage to become the polluter. However, the nitrogen isotope ratio in groundwater is often different from a nitrogen isotope of the pollution origin by isotope concentration by influence and nitrification or the denitrification of the different pollution origin.

Therefore, in this study, I examined the change tendency of a characteristic and the groundwater quality and the nitrogen isotope ratio every area using findings for the nitrate nitrogen high density groundwater area in Kanagawa.

Result

For from 2002 to 2011, I investigated it in the neighboring areas of the environmental standard excess spot to elucidate a cause of the groundwater contamination with nitrate nitrogen. An investigation was carried out so far in 22 areas, 184 wells. Investigation was conducted in Ebina City (two areas), Miura City (one area), Samukawa Town (one area), Chigasaki City (two areas), Ayase City (four areas), Hadano City (nine areas), Isehara City (one area), Nakai Town (one area), and Oiso Town (one area).

In each investigation, I assumed a range of a radius of 1-2km around the environmental standard excess well an area for and sampled groundwater from a 5-15 well in 1 area. The gathered groundwater measured the concentration of dissolved matters and the nitrogen stable isotope ratio. In addition, using land use classification figure of the Geographical Survey Institute publication, I calculated the land use division ratio in the area for.

Consideration

In the investigation that I went for so far, each nitrate nitrogen pollution cause was classified below. The artificial manure alone origin were 9 areas in 22 areas (41%), the life drainage independent origin were 1 area (5%), artificial manure, the life drainage mixture origin were 7 areas (32%), artificial manure, other mixed origin were 2 areas (9%), and unknown origin were 3 areas. In all 22 areas, the origin by the life drainage were only 1 area. On the other hand, in 19 areas where a cause became clear, influence of the artificial manure was seen in 18 areas. From this, in the nitrate nitrogen high density groundwater area in Kanagawa, it was revealed that it was supposed influence by the artificial manure at most spots. From this, in the nitrate nitrogen high density groundwater area in Kanagawa, it was revealed that it was supposed influence by the artificial manure at most spots.

Keywords: nitrate nitrogen, nitrogen isotope ratio

Seasonal variation in nitrous oxide concentration of groundwater and its emission potential in agricultural watersheds

Koki Onishi^{1*}, Shin-ichi Onodera², Mitsuyo Saito³, Yuta Shimizu², Masashi Yoshikawa²

¹Fukken, ²Integrated Sciences, Hiroshima University, ³Ehime University

Distribution characteristics and seasonal change of nitrous oxide (N₂O) in an unconfined aquifer were examined, based on changes in concentrations of N₂O, nitrate-nitrogen (NO₃-N) and other chemical components in the groundwater flow of an agricultural catchment affected by significant fertilizer application. N₂O concentrations were about 0.004 mgN L⁻¹ in the upstream area, and were positively correlated with NO₃-N concentrations. These results suggest that the nitrification process influences N₂O concentrations in upstream areas. In the downstream area, N₂O concentrations in deeper groundwater (> 15 m) were significantly higher (0.013 mgN L⁻¹), but they were very low in shallower groundwater (< 15 m), below the detection limit. Spatial distributions of dissolved oxygen (DO) and dissolved organic carbon (DOC) suggest that shallower groundwater is characterized by a strong reducing condition and high organic carbon content compared to deeper groundwater. These results suggest that a complete denitrification process (NO₃⁻ to N₂) occurs in shallower groundwater, whereas an incomplete denitrification process causes the increase of N₂O concentrations found in deeper groundwater. N₂O concentrations in winter were significantly high, but N₂O concentrations in summer were low. Groundwater level in summer was higher than that in winter. These results suggest that groundwater level influences the denitrification process. N₂O discharge from groundwater to sea water was 1.95kgN. The N₂O discharge was 0.3% compared with the NO₃-N discharge.

Keywords: nitrous oxide, groundwater, agricultural watersheds, nitrate, emission, seasonal variation

Characteristics of nutrient condition and phytoplankton variation and its controlling factors in agricultural reservoirs

Mitsuyo Saito^{1*}, Shin-ichi Onodera², Yuta Shimizu²

¹JSPS PD, CMES, Ehime Univ., ²Grad. School of Hiroshima Univ.

Reservoirs and ponds have been used as important water resources in the agriculture area with little rain, and its importance will increase with the worldwide climate change. However, the lack of maintenance causes eutrophication and phytoplankton bloom, which often induces the problem such as clogging of irrigation line. For the sustainable use of agricultural reservoirs, it is important to clarify the trigger of eutrophication and control it based on the characteristics of reservoirs. We aimed to confirm the characteristics of nutrient condition and phytoplankton variation and its controlling factors in agricultural reservoir, nutrients and fluorescence data were collected and the relation with residence time was examined on the 6 ponds (P1~P6) located on a small island intensively cultivated by citrus farms in western Japan.

Residence times of pond water were estimated to be from 7 to 2,348 days, which decreased about 1/3 from August to December in P1, P2 and P3. Nutrient condition in the pond water was totally in the significant N-rich and P-limited condition compared with the Redfield ratio in both summer and winter. The estimated budget of DIN, DIP and DSi suggests that the ponds acted as a sink of nutrients to the downstream environment throughout the year. Fluorescence was totally higher in the ponds with shorter residence time. It suggests the possibility of that cyanobacteria with relatively low chlorophyll content was dominant in the longer residence time ponds, while other phytoplankton such as diatom and green algae was dominant in the shorter residence time ponds in the study area. On the seasonal variation, residence time decreased while fluorescence increased in P1 and P2 from August to December. It suggests that the dominant species of primary producer changed from cyanobacteria to diatom from summer to winter. These results suggest that residence time is one of the critical factors for controlling the phytoplankton variation in the ponds.

Evaluation of phosphorus species and their relationship to benthic microalgae in an estuarine tidal flat

Mariko Yamamoto^{1*}, Shinichiro Ueno¹, Kenichiro Sugitani¹

¹Graduate School of Environmental Studies, Nagoya University

Estuarine tidal flat ecosystem plays a significant role in suppressing eutrophication of marginal seas through the uptake and accumulation by organisms comprising complex foodweb. Nitrogen and phosphorous are known to be major two elements that potentially cause eutrophication, although their behavior in tidal flat ecosystems are distinct. While nitrogen, one of the main nutrients input to intertidal flats, is supposed to be removed from there finally by denitrification, the other major nutrient, phosphorus stays in the subaqueous ecosystem, in various forms such as hydroxide, ions, and organic matters. So far, numbers of studies on phosphorus cycle in tidal flat have been operated. However, the quantitative analyses of contribution of benthic microalgae to the phosphorous cycles in tidal flat ecosystem have not yet been fully addressed.

In this study, we chose Fujimae tidal flat, Nagoya City, Central Japan, as research field and examined contribution of microalgae to the phosphorous cycles in the tidal flat ecosystems, by analyzing major and minor compositions of sediments, concentration of chlorophyll a and opaline silica, and numbers of diatoms on the surface and with the subsurface of sediments.

Bulk concentrations of phosphorous obtained by XRF analyses are positively correlated with biomass calculated from chlorophyll($r = 0.78$), suggesting that phosphorus is the limiting nutrient in this tidal flat. In addition, results of a sequential extraction of phosphorus show that iron-binding phosphorus accounted for more than 50 % on the sediment surface, and authigenic apatite and detrital apatite accounted for about 50 % at the 15 cm depth of the sediment. While insoluble phosphorus including benthic microalgae and terrigenous organic matter accounted for 3 % and 8 %, respectively.

Further observation and analysis will identify the relationship between phosphorus forms and benthic microalgae, and their response.

Keywords: phosphorus, estuarine tidal flat, benthic microalgae

Evaluation of heavy metals pollution in sediment in the Nagara River Estuary Barrage region

Subuda x^{1*}, Shinichiro Ueno¹, Kenichiro Sugitani¹

¹Graduate School of Environmental Studies, Nagoya University

Heavy metals are the most common and serious pollutants in natural environment because of their toxicity, persistence and bioaccumulation problems. The excess occurrence of heavy metals in sediment can be attributed to either natural or anthropogenic sources. Heavy metals that released from these sources tend to be absorbed onto suspended particulate matters, furthermore, incorporated into bottom sediment as SPM precipitated. Sediment acts as carrier and source of heavy metals in aquatic environment, and reflects water quality.

The Nagara River had long been recognized as one of the cleanest rivers in Japan. However, in 1995, for the purposes of flood control and water use, the Estuary Barrage has been brought into operation, and the natural environment of the Nagara River has changed remarkably. So far, the studies carried out by numbers of researchers and communities which were mainly focused on downstream of the Estuary Barrage, and the upstream area was not studied that much. However, unpublished work by Hiramatu (2009) suggests that by the Barrage (the Nagara River Dam) and inflow of poorly treated sewage waters cause the environmental problems at its upstream area.

We collected systematically 70 sediment samples within a stretch of 30 km along the upstream of the Barrage, from 2009 to 2011, using Ekma-Birge Grab. Sediment samples were dried at 105 °C for 24 hours and homogenized. These samples were fractionated using a series of sieving process according to needs of further analysis. The grain size distributions of sediment samples suggest that the fraction <180micrometer would be a reasonable choice for further analysis. Major components (SiO₂, TiO₂, Al₂O₃, Fe₂O₃, MgO, MnO, Na₂O, K₂O and P₂O₅) and minor components (Ba, Co, Cr, Cu, Nb, Ni, Pb, Rb, Sr, Th, Y, Zn, and Zr) were analyzed by X-ray fluorescence (XRF) spectrometer. FLASH 2000 organic elemental analyzer was employed to analyze the C, N, H, and S.

Compare to the upper stream, the content of finer fraction, and that of P₂O₅ and C_{total} in sediment increased at the Barrage area. Meantime, the high C/N ratios (C/N>10), suggest terrestrial organic matter likely to be responsible. The major compositions (SiO₂, TiO₂, Al₂O₃, Fe₂O₃, MnO, MgO, CaO, Na₂O, K₂O, P₂O₅) of the sediment are in a great agreement with the upper crustal average of Japan. Compared to the upper crustal average values of Japan (Togashi et al, 2000), these elements are enriched or depleted to various degrees; Co (x1.5-2.2), Cr (x0.3-2.1), Cu (x0.2-2.1), Ni (x0.5- 1.7), Pb (x0.9-3.6) and Zn (x1.5-4.2). The enrichment factors of heavy metals differ from site to site, and some samples are remarkably enriched in Zn and Pb. According to the location of these enriched sites, Sakai River, Sai River, and Kuwabara River, these three branches likely to be contributing to the enrichment of those two elements.

Keywords: Nagara River, sediment, heavy metals

The effect of small impoundments on nutrient transport in a suburban watershed

Yuta Shimizu^{1*}, Shin-ichi Onodera¹, Koki Onishi¹, Mitsuyo Saito², Masashi Yoshikawa¹

¹Graduate School of Integrated and Arts Sciences, Hiroshima University, ²Center for marine environmental studies, Ehime University

There are small impoundments on streams such like weir in the worldwide. In spite of large number of them, the effect of those on nutrients retention is little understood. The objective of this study is to confirm effect of small impoundments on nutrient transport on a catchment scale. Seasonal variation of DN:Cl- ratio which indicates that the ratio increased in summer season and decreased in winter season was confirmed at impoundments. The result of relationship between residence time and difference of concentration of nitrate indicates that greater decrease of nitrate confirmed when it has relatively long residence time. Especially, attenuation of nitrate would start from 2 days of residence time, which is shorter than days that large impoundment start from 8-10 days. Therefore, it is suggested that small impoundments are more effective for nitrate attenuation than large ones. In contrast, the relationship with difference of concentration of DN shows that there is a possibility that the large impoundment could be changed from sink to source. However, small impoundment is easy to maintain itself than large reservoir as dams, by dredging of sediment and removal of colonies of phytoplankton. For conservation of water environment in watersheds which are loaded anthropogenic nitrogen, the small impoundments should be used as places for purification of nitrogen in meaning of a kind of reservoir operation.

Keywords: small impoundment, residence time, nitrogen removal, Yamato River

The comparative study of the water quality in Izu Islands

Akira Hama^{1*}, Koji Kodera²

¹Undergrad. Hosei Univ., ²Department of Geography, Hosei Univ.

1.Introduction

Understanding of the water environment in the islands is important for the use of water to people living in the island, the value of research in terms of understanding of the sub-regional water environment (islands).The target area, Izu islands are volcanic islands, which were created by volcanic activities. Their water environment can be considered as extra ordinary. There are various characteristics of the islands, but especially volcanic islands have high permeability of water, less permanent rivers and difficulties to contain fresh water (Shindo 1992etc.). In this study, I set Izu islands, which were built by volcanic activities and an isolated island, through the comparison of the findings, he explores the challenge to clarify the current status of the water environment in each island.

2.Target area

The islands were created by volcanic Submarine caldera volcano and both Izu Islands are composed of Izu Oshima people have lived since the Edo period large, Hachijo, Miyakejima, Nijima, Kozu-shima, Mikura, in the Toshima area in particular that Ru is Nanashima Izu, 287km, about most Honshu near Izu-Oshima is at a distance of about 25km from Hachijo Island's southernmost Izu Peninsula from Tokyo. Compared to the mainland, precipitation of the Izu islands, is much more, but it can not be said that the islands are blessed the freshwater environment except for the Mikura-Hachijo spring water rivers and constancy is a rich variety in order to obtain fresh water Efforts have been made (Shindo 1992).

3.Results and Discussion

As you can see in the water composition part, all through the islands, from the effects of sea-based rainwater environment of isolated island was great.

If you look at the key diagram, there's a variation in the vertical direction, from the fact that the point was strongly influenced by water type Na-Cl significant impact from the sea and the rain is coming in the upper right plots in other areas which can be mixed with groundwater that are relatively long residence time are plotted on the per-left and lower left. The Islands with Strong influence of rainfall are plotted to the right of the key diagram. In any islands, percentage of NaCl has a lot to do in the water composition, looking at the distribution of the diagram.

There's some densely populated areas, distributed in the water environment of Izu Islands, the remarkable human pollution can't be seen in the Islands, except for such areas. Natural effects such as annual precipitation, drought are considered as heavily involved.

4.Conclusion

This study, in the island that is seemingly similar conditions, shows a variety of water, we have found that there is a large difference. From now on, I continue pursuit field surveys and analysis, then clarify the current status and issues of the water environment of the islands.

Keywords: Volcano, Izu Islands, Precipitation, Dissection

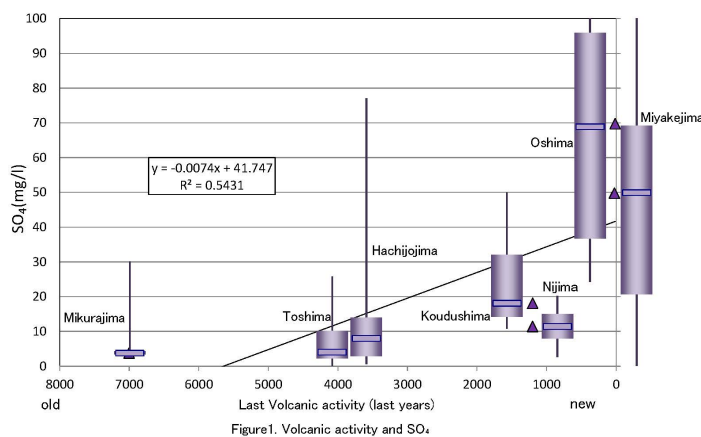


Figure1. Volcanic activity and SO₄

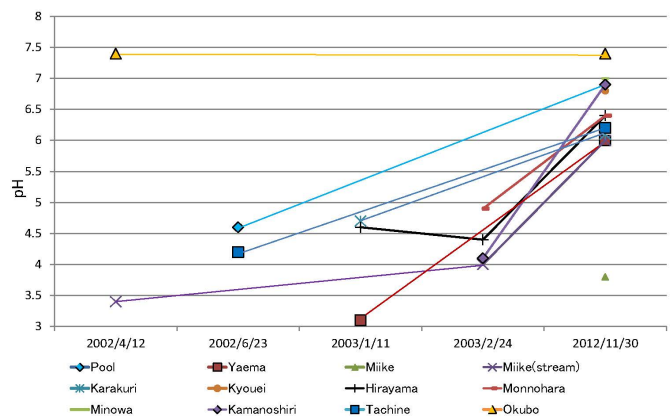


Figure2. Comparing water quality of surface water(Miyakejima)

Variation characteristics of stream water quality in the Shiribetsu River basin

Syugo Kobayashi^{1*}, Koji Kodera², Yoichi Morimoto³

¹Hosei Univ., ²Hosei Univ., ³Hosei Univ.

1 Introduction

Shiribetsu river is known as a clear stream in Japan. It is a valley it has Mt.Yotei and the Niseko federation in the head of a river, and with abundant eminences. In the valley, it is a farm area in eminent Hokkaido, and there are a lot of use as the agricultural water. The Ministry of Land, Infrastructure and Transport is continuously doing the water quality observation. However, the water quality observation intended for the entire valley including the branch doesn't have the example. In this study, Shiribetsu river basin was observed, the point change in the river quality and the season change were clarified, and the understanding of the stream water quality change characteristic of the valley was tried in the present study.

2 Shiribetsu river basin

The Shiribetsu river is originated the source in deflection Gaku, and flows to the west aiming at the Sea of Japan. It is a class A river that flows into the Sea of Japan. They are 126km in the length, and 1,640 km² in the valley area.

3 Research method

The stream water quality observation was done every other month in March, '3-2013 2-2012, and 63 points or less (fixed point 44) were investigated. The observation item is AT,WT,EC,pH,RpH flowing quantity. It analyzed IC,TC,TOC, and the ion chromatograph was analyzed (Na+,K+,Ca+2,Mg+2,Cl-,NO3-,SO42-), and it made to figure by GIS and it analyzed it.

4 Result and consideration

The water quality of the main stream showed the water quality of the Na-HCO₃ type, and EC changed from the upstream to the downstream in 43-95microS/cm when diluting it with snowmeltwater. It is thought that it is because the amount of the base flow is large 51-126microS/cm in July that was the highest. It returns normally by the confluence of the branch though pHs rise temporarily up to 8.4 by manure in the middle reaches of the main stream part.

5 Summary

Geological features and the land use's analyzing hydrology characteristics from the main dissolved matter necessary, and influencing the river quality greatly became clear in the present study. It wants to calculate the loading dose in using small and each middle reaches region, and to tie to further clarification GIS of the water quality formation mechanism in the future.

Keywords: Shiribetsu river basin, stream water quality, seasonal variation, spring, Mt.Yotei

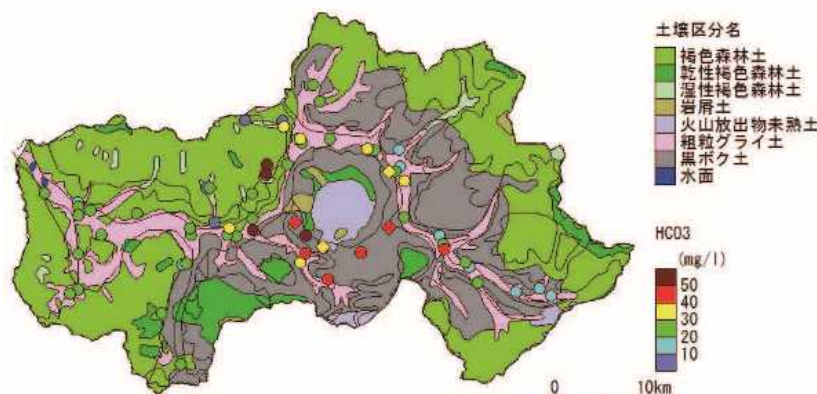


Fig.1 Soils and HCO₃ concentration on the stream water (september)

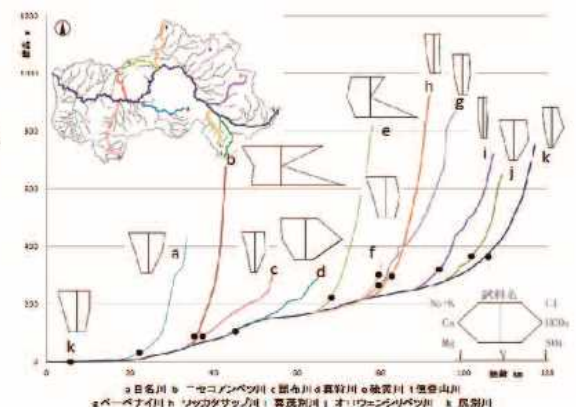


Fig.2 Longitudinal Profiles of the Rivers and water quality composition