

Characteristics and Significant Exploration of Small Solar System Bodies

Yasunori Miura^{1*}

¹Visiting (Universities)

Characteristics and significant exploration of the small Solar System bodies are summarized as follows:

- 1)Small bodies of the Solar System are primordial materials to form the planets by the impact processes.
- 2)Small bodies of the Solar System are remained as nano-solid materials after air-liquid phases during impact processes.
- 3)Impacts on heterogeneous surfaces penetrate light elements of carbon and water hydrogen to the interior and be stored for magmatic melting with lift-up eruption of volcano-like process.
- 4)Light elements on the present Earth are not used for the small bodies, because the Earth is changed so much by ocean water system.
- 5)Monomer carbons of organic compounds are formed everywhere if shock-wave reaction is generated there. However, to form high molecules of supra- to giant-molecules for organic life compounds are required for stable and long high temperature condition, which is not impact condition process in smaller bodies in the Solar System .

In short,

- 1)Sample return plan with carbon and hydrogen is significant to our Earth due to be loss by in-situ exploration.
- 2)Life carbon organic compounds are not expected on smaller bodies due to difficulty of measurements, because shock-wave reaction makes any monomer organic compounds.
- 3)Thus there are no scientific significance except sample returning,if engineering supports are not expected.

Keywords: Smaller bodies, Characteristics, Exploration, Carbon and water, Life organic compounds, Mini bubble texture

Laboratory Experiment on Impact Process of Granular Target under Microgravity: Drag Equation of Projectile Penetration

Takaya Okamoto^{1*}, Carsten Guettler¹, Akiko Nakamura¹, Jan-Hendrik Hagemann², Koji Wada³, Jurgen Blum²

¹Graduate School of Science, Kobe University, ²Braunschweig University of Technology, ³Planetary Exploration Research Center, Chiba Institute of Technology

Regolith and boulders are observed on the surface of asteroids. These objects could be formed by impact and reaccumulation. For example, images taken by Hayabusa showed that the surface of asteroid Itokawa was divided into rough terrain, mostly consisting of numerous boulders, and smooth terrain composed of fragmental debris with grain sizes (Fujiwara et al. 2006). Itokawa is 300-m sized small asteroid, which has the escape velocity of 10 to 20 cm s⁻¹ from the surface and microgravity of 0.1mm s⁻². Reaccumulation process would have occurred below the escape velocities, i.e., asteroids of similar size to Itokawa would have reaccumulated at a velocity as low as cm s⁻¹ to m s⁻¹. Crater formation process and ejection mechanism under such condition are not fully understood. In this study, to understand reaccumulation process on the surface of asteroids, we conducted low velocity impact experiments of granular target, that is simulated asteroid surface, under microgravity. In this presentation, we focus on drag equations of projectile to understand penetration of boulders into regolith surface of small asteroids.

Glass beads (sphere) and sand (irregular shape) were used as targets. The grain sizes ranged 90-106 micro meters and 355-500 micro meters for glass beads, and 100-180 micro meters and 300-600 micro meters for sand. Aluminum cylinder with diameter of 5 mm and length of 15 mm with a hemispherical tip was used as a projectile. Impact experiment was conducted by a drop tower in Braunschweig University of Technology, Germany. By dropping a projectile and a container filled with the target material with a time interval, low velocity impact under microgravity was achieved (Beitz et al., 2011). Two high-speed cameras are also dropped with the target. Impact velocities were ~5cm s⁻¹, 23cm s⁻¹, ~50cm s⁻¹ and ambient pressures in the chamber were ~20 Pa and ~500 Pa.

Ejecta cone was not clearly observed for sand target whereas it was observed clearly for glass bead target. We measured the distance between the rear edge of projectile and the surface of target on high speed camera images and analyzed the deceleration process of projectile. The result showed that projectile was decelerated more effectively in sand target than in glass bead target. As a first analysis, we applied three equations of motion; drag force is proportional to square of projectile velocity; drag force is proportional to velocity; drag force is proportional to a constant and independent of velocity. The deceleration curve of the drag force proportional to velocity fitted the experimental data better than the other curves. Drag force proportional to velocity was also shown in an impact experiment and numerical simulation of plastic sphere into glass bead target at initial velocity of 70 m s⁻¹ (Nakamura et al. 2013). We discuss how the deceleration process depends on target material, grain size of target and impact velocities.

Experimental study on impact into sand under simulated reduced gravities

Masato Kiuchi^{1*}, Aoki Takanobu¹, Akiko Nakamura¹

¹Graduate School of Science, Kobe University

The geographical feature of the surface of asteroids, which is largely covered by regolith, is mostly governed by the collision phenomenon. Because gravitational acceleration at the asteroid surface is very small, when considering the evolutionary process of the asteroids surface, it is important to understand the impact crater formation under microgravity condition.

However, not many impact cratering experiments under microgravity condition have been conducted. As one of few examples, Gault and Wedekind (1977) conducted the experiment in which the target was hung by springs of constant force with different spring constants and was dropped to achieve smaller gravitational acceleration than the earth's gravitational acceleration. The acceleration of the target was varied over a range of 0.1-1 G. The impact velocity was between 0.4 and 8.0 km/s, and the target material was quartz sand. The crater diameter was proportional to -0.165 power of the acceleration. On the other hand, Takagi et al. (2007) conducted a series of microgravity experiments by using a drop tower. The gravitational acceleration for the target was less than 10^{-5} G, impact velocity was between 45 and 360 m/s and the target material was soda-lime glass beads with mean diameter of 0.08 to 0.9 mm. The crater diameter formed under microgravity was not different from the crater diameter formed under 1 G, which was contradictory to the result of Gault and Wedekind (1977). Because there is little experimental data, the reason of the difference between these results is not fully understood, and further experiment is required.

Therefore, we started to conduct a new impact experiments of low velocity under simulated smaller gravities by dropping the target with springs of constant force. As a preliminary experiment, sea sand (grain diameter is approximately 0.1 mm) in a container was used as a target, and we changed the acceleration by changing the weight attached to the container. The acceleration was measured by an accelerometer and was determined with a fluctuation of $\pm 6 \times 10^{-3}$ G.

We will present the result of impact experiments conducted at reduced gravity using this device.

Keywords: impact experiment, microgravity, crater

Fragmentation degree of impactor in collision with asteroid regolith

Hiroki Nagaoka^{1*}, NAKAMURA, Akiko¹, OKAMOTO, Takaya¹, HASEGAWA, Sunao²

¹Graduate School of Science, Kobe University, ²Institute of Space and Astronautical Science, JAXA

Introduction: Many of meteorites are fragments of disrupted asteroids, therefore we can get the information of early stages of the Solar System, because it is considered that thermal activity was stopped in the early stage in the parent bodies of chondrites. However, there are meteorites in which the components from various parent body origins are mixed. These meteorites contain the fragments of the different bodies' material and are brecciated. For example, it was reported that the fragments of carbonaceous chondrite are contained in Tsukuba meteorite and Almahata Sitta meteorite (Nakashima et al. 2003, Jenniskens et al. 2009). HED meteorites are known to be originated from asteroids (4) Vesta. HEDs generally contain the carbonaceous chondrite to 5vol. % (Zolensky et al. 1996), and on the Vesta surface there is a crater that was probably formed by the carbonaceous chondrite impact (Reddy et al. 2012). Thus, brecciated meteorites containing the fragments of other bodies' material were probably formed by impacts of smaller bodies into boulders or regolith of another bodies to have been captured in the regolith. The regolith containing the fragments was lithified by further impacts (e.g. Rubin et al. 1983). In addition, a 6 m-sized black boulder on the surface of Itokawa (Hirata and Ishiguro 2011) may also be carbonaceous chondrite of other body origin. Therefore, taking the material of other bodies has likely been a universal process on asteroid surface. In this study, we investigated the fragmentation degree of projectile by laboratory impact experiments in order to clarify the fragmentation degree of a meteorite in collision with asteroid regolith.

Experiment: Basalt projectiles simulating meteorites were impacted on regolith like silica-sand-target. We previously conducted the experiment at velocities of 167 to 960 m/s (Nagaoka et al., the Japanese society for planetary science, fall meeting, 2012). In this study, we conducted the experiment at velocities of 2 to 5 km/s that simulated the mean impact velocity in the asteroid belt, which is ~4.4 km/s (Bottke et al. 1994). The experiments were performed by a two-stage light-gas-gun facility at the ISAS/JAXA. Recovered fragments were sorted out by 0.5 mm size meshes.

Result: We studied the relation of the largest fragment mass fraction to the non-dimension impact pressure (in this study, it was defined as the initial peak pressure divided by the tensile strength of projectile). It was found that projectile began to break at pressure of ten times greater than the tensile strength of projectile that corresponded to about 200 MPa. Moreover, the largest fragment mass fraction was larger than that expected from the impact experiments at velocities of a few 100 m/s. This may be explained by the increase of the dynamic strength of projectile according to a strength-strain rate relation (Grady and Kipp 1980).

Keywords: asteroid, meteorite, impact

Numerical simulation on trajectories of crater ejecta from a small asteroid

MITSUTA, Tomohiko¹, Naru Hirata^{1*}, Koji Wada², Hiroki Senshu², Hajime Yano³, Masahiko Arakawa⁴

¹Univ. of Aizu, ²Planetary Exploration Research Center, Chiba Institute of Technology, ³Institute of Space and Astronautical Science and JAXA Space Exploration Center, Japan Aerospace Exp, ⁴Graduate School of Science, Kobe University

An artificial impact cratering experiment is planned in the Hayabusa-2 mission by a small carry-on impactor. Trajectory of ejecta from the crater shows complex behavior due to an asymmetric gravitational field of the small and irregular-shaped asteroid and solar radiation pressure. We examine the trajectories and fate of impact ejecta around the asteroid using numerical simulation. Gravitational field of the asteroid is estimated by a polyhedron method with a polygon shape model of the asteroid. Solar radiation pressure to small ejecta grains is modeled by a cannon-ball method. Size-frequency distributions and velocity-frequency distribution of ejecta particles are considered to estimate a time development of ejecta distributions around the asteroid.

Keywords: Hayabusa 2, 1999JU3, asteroid, crater, ejecta

Reflectance spectroscopy of CM2 chondrite (Nogoya) using the Hayabusa2 ONC-T Flight Model

TAKEI, Akito^{1*}, SATO, Masaki¹, CHO, Yuitiro², SUZUKI, Hidehiko¹, YAMADA, Manabu³, KAMEDA, Shingo¹, Hayabusa2 ONC team⁴

¹Rikkyo Univ., ²Tokyo Univ., ³Chiba Institute of Technology, ⁴JAXA

Hayabusa successfully brought samples from the S-type asteroid Itokawa. Based on the technology of Hayabusa, Hayabusa-2 is designed to collect samples of surface material from the near-Earth asteroid 1999JU3 and return them to Earth. 1999JU3 is classified as a C-type asteroid, which differs from S-type asteroids in their degree of thermal metamorphism. There is a possibility that primitive samples exist on 1999JU3, because C-type asteroids are less thermally metamorphosed than S-type asteroids. Ground-based observations have indicated, the presence of hydrated materials on 1999JU3's surface. However, these materials are not distributed over the entire surface of the asteroid. To bring the primitive samples to Earth, we observed the asteroid using the optical navigation camera (ONC) mounted on Hayabusa-2. ONC-T's effective wavelength are same as those of the Hayabusa Asteroid Multiband Imaging Camera (AMICA); however, it differs from AMICA in the 430 and 750 nm wavelengths, and the neutral density (ND) filter. Hayabusa-2 ONC-T has seven filters and one glass cover, with effective wavelengths of 390, 480, 550, 589.5, 700, 860, and 950 nm. Hayabusa-2 enables to find the place on the asteroid surface where aqueously altered minerals are concentrated, observing the absorption band of phyllosilicate around 700nm. This will be helpful for us to decide the landing point of Hayabusa2. We examined the Hayabusa-2 ONC-T calibration and imaged meteorites via multi-band imaging. The purpose of this study is to determine the feasibility of detecting primitive rocks on 1999JU3 using Hayabusa-2 ONC-T. We also examined the spectral reflectance properties of the meteorite Nogoya, which is similar to C-type asteroids. We directly compared ONC-T's images with the spectroscopic data; our results indicate that ONC-T can detect an absorption feature centered near 700 nm.

Keywords: Hayabusa2, ONC, meteorite, Nogoya

Sciences prospected from the results of ground tests for NIRS3: the Near Infrared Spectrometer on Hayabusa-2

Takahiro Iwata^{1*}, Kohei Kitazato², Masanao Abe¹, Makiko Ohtake¹, Shuji Matsuura¹, Koji Tsumura¹, Yusuke Nakauchi³, Takehiko Arai⁴, Takahiro Hiroi⁵, Hiroki Senshu⁶, Mutsumi Komatsu⁷, Tomoki Nakamura⁸, Sei-ichiro WATANABE⁹

¹ISAS/JAXA, ²Univ. Aizu, ³Graduate Univ. Advanced Studies, ⁴NAOJ, ⁵Brown Univ., ⁶Chiba Inst. Tech., ⁷Waseda Inst. Adv. Study, ⁸Tohoku Univ., ⁹Nagoya Univ.

NIRS3: the Near Infrared Spectrometer is one of the candidate scientific instruments which will be equipped on Hayabusa-2 mission. It aims to observe near infrared spectroscopy at the wave length band of 1.8-3.2 micrometer to detect specific molecular absorption lines, including the absorption by hydrated minerals at 3 micrometer, on the target C-type asteroid. The major purpose of NIRS3 is to observe the absorption bands of hydrated minerals in the 3 micrometer band on the candidate target C-type asteroid 1999JU3, which has been reported in ground observations to have an absorption band of hydrated minerals at 0.7 micrometer. C-type asteroids are thought to be mother celestial bodies of carbonaceous chondrites (C-chondrites). C-chondrites have been classified into sub-groups by their composition, organization, and isotope ratio of oxygen. The spectra of C-type asteroids have also been classified into sub-types by their inclination and the existence of absorption bands detected in ground observations. However, the relationship between the sub-groups of C-chondrites and the sub-types of C-type asteroids has not been clarified due to the effects of solar radiation and space weathering. Therefore, we will directly observe the surface of a C-type asteroid without the terrestrial atmospheric absorption in the 3 micrometer band using NIRS3. Detecting younger terrain by global mapping of the asteroid and the ejecta of new crater by the Small Carry-on Impactor (SCI) will also provide the spectra of surface less affected by space weathering. To estimate the quantities of the hydrated minerals with accuracies of 1 to 2 wt%, we designed the NIRS3 system to have a signal-to-noise ratio (SNR) exceeding 50 at 2.6 micrometer for global mapping.

The critical design of NIRS3 started in August, 2011. We performed ground properties tests and environmental tests using the engineering model of NIRS3-S and NIRS3-AE including the newly developed InAs sensor and the shutter. Results of SNR property tests implied that the rapid increase of the dark current in the InAs sensor degrades the SNR when the integration time exceeds 200 microsecond at 193K. Therefore, we improved the SNR by (1) cooling the sensor to below 187K to reduce the dark current low sufficiently for 400 microsecond integration, (2) sampling three-times of 400 microsecond integration in one shutter-open period, and (3) spectral binning of two channels. The adjusted SNR remains above 50 at 2.6 micrometer during a sufficient period for global mapping. The later sensor property tests of flight model produced the better qualities for noise and linearity (Nakauchi et al., this meeting), which suggests the on-board SNR will provide enough performance. Thus, NIRS3 will shed light on the initial composition, aqueous alteration, thermal metamorphism, and space weathering on the surface of a C-type asteroid.

Keywords: Hayabusa-2, asteroid, 1999JU3, NIRS3, near infrared, spectrometer

Development of Thermal Infrared Imager onboard Hayabusa2

Tatsuaki Okada^{1*}, Tetsuya Fukuhara², Satoshi Tanaka¹, Makoto Taguchi³, Takehiko Arai⁴, Hiroki Senshu⁵, Yoshiko Ogawa⁶, Kohei Kitazato⁶, Hirohide Demura⁶, Ryosuke Nakamura⁸, Tomohiko Sekiguchi⁹, Sunao Hasegawa¹, Takeshi Imamura¹, Tsuneo Matsunaga⁷, WADA, Takehiko¹, Jun Takita¹⁰, Naoya Sakatani¹¹, HELBERT, Joern¹², MUELLER, Thomas G.¹³, HAGERMANN, Axel¹⁴

¹Institute of Space and Astronautical Science, JAXA, ²Hokkaido University, ³Rikkyo University, ⁴National Astronomical Observatory of Japan, ⁵Planetary Exploration Research Center, Chiba Institute of Technology, ⁶University of Aizu, ⁷National Institute of Advanced Industrial Science and Technology, ⁸Hokkaido University of Education, ⁹National Institute for Environmental Studies, ¹⁰University of Tokyo, ¹¹Graduate University for Advanced Studies, ¹²German Aerospace Center, ¹³Max Planck Institute for Extraterrestrial Physics, ¹⁴Open University

Thermal Infrared Imager (TIR) onboard Hayabusa2 will take a mid-infrared image, or thermograph, of C-class Near-Earth Asteroid 1999JU3. TIR is based on two dimension un-cooled micro-bolometer array and images the asteroid in the wavelength of 8 to 12 μm . Its field of view covers 16 deg by 12 deg (320 by 240 effective pixels) with 0.05 deg resolution per pixel, corresponding to about 20m per pixel when observed from Home Position, 20km altitude from asteroid. Thermal radiation depends on the temperature and thermal emissivity of asteroid surface. The latter is represented by that of carbonaceous chondrites. In 8 to 12 μm , low diversity of thermal emissivity (0.96 \pm 0.02) affects surface temperature by only \pm 2 degC error. Thermal inertia relies on heat capacitance and thermal conductivity. For rocks, thermal inertia is influenced by porosity. Porous rock shows 1000 to 2000 in SI unit, while higher than 2000 for condensed rock. For fine particles, sands, or pebbles, both of porosity and particle size influence the thermal inertia. It is typically less than 100 for fine sands, 100 to 200 for millimeter-sized sands, 200 to 400 for centimeter-sized pebbles.

Maximum and minimum peak temperatures on asteroid surface as well as the delay time to reach peak temperature varies by those such as surface thermal inertia, albedo, geographical latitude, and asteroid rotation period. Thermal inertia at each site on asteroid is determined by comparison of observation with calculated thermal emission. Asteroids ever explored show a variety of surface conditions or geologic features, so as for 1999JU3. Huge boulders that originated from its parent body might show condensed state in the past whether it is still porous and primordial or dense and compacted. Flat area, crater ejecta, or pond-like feature is formed by sedimentation, and its particle size (fine sands or pebbles) and regional distribution indicates the granular flow or sedimentation processes. Large crater directly shows the inside of asteroid, which informs whether asteroid interior consists of porous materials or rubble-pile boulders. They are distinguishable by thermal inertia mapping. Comparison of thermal imaging by TIR with ground-based observation and calculated thermal model will increase the asteroid thermal model and the effect of thermal emission by surface roughness.

Here we report the current status of TIR development. Although TIR is based on LIR onboard Akatsuki, there are something different such as mechanical and thermal environments to be experienced, temperature range to be observed, and digital electronics for onboard data handling. Now the flight model of TIR has been manufactured to be tested and verified. Using a proto model, mechanical environment test on spacecraft has been completed in January 2013. Thermal calculation is conducted for the case of cruising and touchdown to asteroid. Focal length of TIR optics has been adjusted using a specific target and a flat panel heater. In the initial integration test, all the commands, telemetries and functions of TIR has been checked successfully, although some interface still remains unchecked. Automatic observation operation modes will be tested in the late stage of IIT. After IIT, TIR component environment tests will be conducted, and performance and calibration of TIR will take place for scientific purpose.

Keywords: Hayabusa2, asteroid, thermal inertia, planetary surface process, thermal emission, temperature

Simulation of thermal inertia measurement of an asteroid by Thermal Infrared Camera onboard HAYABUSA 2

Makoto Taguchi^{1*}, Rie Yamaguchi¹

¹Rikkyo University

The asteroid explorer HAYABUSA 2 launched in 2014 will visit a C-type asteroid 1999JU3 which may preserve composition when the solar system was formed. One of the scientific purposes of the HAYABUSA 2 mission is to infer the surface physical properties and internal structure of the asteroid by measuring its thermal inertia. In this study observation of the asteroid surface by Thermal Infrared Camera onboard HAYABUSA 2 was simulated by an experiment. Surface temperatures of a rock, gravel and sand of feldspar were measured by a commercial infrared camera, and accuracy of thermal inertia derived from the temporal variation of the surface temperature was examined. Albedo of the samples and spectral luminosity of a halogen lamp were measured by a spectrometer. The surface temperature of the sample was obtained from temperatures of two aluminum plates simultaneously measured by thermocouples and their gray levels in the infrared image obtained by the infrared camera, and thermal inertia of the sample was derived. The experiment was performed for two cases in which the angle subtended by the lamp and infrared camera seen from the sample was about 10 and 45 degrees. As a result the thermal inertia of same material depends on sample size; it increases from sand, gravel to a rock. This simulation experiment shows that HAYABUSA 2/TIR is able to derive thermal inertia of an asteroid by measuring its surface temperature variation due to rotation and to provide information on surface physical properties and internal structure of the asteroid.

Detection of dust around 1999JU3 using Hayabusa-2 LIDAR

Hiroki Senshu^{1*}, Masanori Kobayashi¹, Maki Hattori², Shoko Oshigami³, Noriyuki Namiki¹, Takahide Mizuno⁴, Hayabusa-2 LIDAR Science group¹

¹PERC/ Chitech, ²Graduate School of Frontier Science, The University of Tokyo, ³National Astronomical Observatory of Japan, ⁴Japan Aerospace Exploration Agency

The surface of an airless object suffers from bombardments of micrometeoroids. The bombardments produce small fragments, or dust grains, on and around the surface of the object. Dust grains on the surface could be ejected from the surface due to some reasons such as seismic shaking, another impact, electric repulsion, etc. Lateral transport of dust particles at the surface of the object is likely very important for formation of local morphology. Also, vertical transport of dust is critical for interpretation of irradiation age of cometary rays and implantation of solar wind elements which could constrain orbital evolution of the object. We are planning to detect dusts around the target object of Hayabusa-2 mission, 1999JU3, by using Hayabusa-2 LIDAR.

Hayabusa-2 LIDAR is one of four remote sensing instruments onboard Hayabusa-2. It measures distance between the spacecraft and a target by taking a time of flight of LASER pulse. The threshold level in optical receiver changes in 8 steps. Dust grains with radius of ten micron meters and spatial density of a few grains per cc is expected to be detected from an altitude of 20km (Hayabusa-2 home position), but it depends not only on the physical properties of dust grains but also on sensitivity of receivers for faint signal. Thus we need to verify the performance of dust detection mode of Hayabusa-2 LIDAR.

We develop a new device which simulates a faint reflected light from dust clouds. When a trigger signal is received, it irradiates LASER with a pre-programmed pattern. The time resolution of the pattern is ten nano seconds and energy changes in 7 steps. The maximum energy of LASER is adjusted by using ND-filter.

In this presentation we will present a strategy to verify the performance of dust detection mode of Hayabusa-2 LIDAR, and discuss the possibility of dust detection around 1999JU3.

Keywords: dust, LIDAR, Hayabusa-2

Engineering Aspect of Small Body Exploration -Hayabusa2 and Future

Yuichi Tsuda^{1*}

¹ISAS/JAXA

The second asteroid sample return mission "Hayabusa-2" is now under development. It is to be launched in the end of 2014 to set out on a round-trip voyage for a C-type asteroid 1999 JU3. The Hayabusa2 mission is regarded as a series of the Japanese programmatic exploration of small body. In order to stably and strongly evolve our small body explorations, the best blend of new technologies and heritage-based technology should always be pursued. This talk reviews the mission scenario of Hayabusa2; what are mission enablers and what are technological challenges in it, and then discusses several future strawman missions that can be realized with our present and near-future engineering capabilities.

Keywords: Planetary Exploration, Spacecraft, Asteroid, Sample Return

Development Status of Hayabusa-2 Deployable Camera (DCAM3)

Kazunori Ogawa^{1*}, Masahiko Arakawa², Yuichi Iijima¹, Kei Shirai¹, Koji Wada³, Rie Honda⁴, Sawada Hiroataka¹, Ko Ishibashi³, Naoya Sakatani⁵, Toshihiko Kadono⁶, Satoru Nakazawa¹, Masanori Kobayashi³, Hajime Hayakawa¹

¹Japan Aerospace Exploration Agency, ²Kobe University, ³Chiba Institute of Technology, ⁴Kochi University, ⁵The Graduate University for Advanced Studies, ⁶University of Occupational and Environmental Health

Collisions between primitive planetary bodies are one of the most important physical processes in the planetary accretion from planetesimals to planets. Asteroids are small primitive bodies on the way to the larger bodies or the fragment bodies such as rubble piles of the evolved bodies, so that the asteroids are possibly be recognized as fossil bodies showing the accretion process in the solar nebula. Impact studies on the asteroid, such as the impact scaling rules related to the cratering and the disruption, are important to reveal the actual manner of planetary accretions in early stage of the evolution.

Small Carry-on Impactor (SCI) on Hayabusa-2 is a small detachable instrument that launches an artificial projectile and simulates planetary impacts on the asteroid 1999JU3. A copper-disk projectile is deformed by explosive in the SCI and forms a semi-spherical shell, and is accelerated to approx. 2 km/s. The tiny asteroid 1999JU3 is a good analogue of planetesimals and suitable to study the effect of micro-gravity on the impact process and elucidate the mechanical properties of planetesimals. The Deployable Camera (DCAM3) is a miniaturized detachable camera inherited from DCAMs in the Japanese IKAROS mission. The DCAM3 is currently under development for observations of the SCI impact. For avoiding a risk that the mother ship encounters high-speed ejecta from the asteroid, a separable instrument is necessary to obtain close up views of the impact while the mother ship is hiding in a safe region far from the impact point.

The scientific observations are performed by DCAM3-D that is a high-resolution visible observation subsystem in the miniaturized DCAM3 body. Scientific objectives of this camera are summarized as (1) clarifying the sub-surface structure, and (2) constructing the impact scaling rule applicable to the surface of asteroid 1999JU3. Observation objects of the camera are ejecta and a subsequent crater of the SCI impact, and a relative position of the SCI to the asteroid when it is launched. DCAM3-D can determine the size and the angle of the ejecta curtain, and the speed of the ejecta spreading or fragment spattering, which are the key information for the above objectives. In addition, low-speed ejecta (dust) spreading will possibly be observed around the DCAM3 in a few hours after the impact.

So far, we conducted the conceptual examinations to specify the required specification of the camera and a communication device. Engineering models were prepared for all components of DCAM3, and verification tests were conducted with them. Currently flight models are in tests for the observation and communication performances. The DCAM3-D sensor consists of a 2000 x 2000 pixels and 8 bit CMOS imager with a wide-angle optics (74 x 74 deg), which takes sequential images of the ejecta spreading with 1 frame/sec at maximum. The digital communication device can send the image data to the mother ship with 4 Mbps. DCAM3-D instruments in the mother ship receive and store all data taken by the deployed camera which continues to produce data for a few hours until batteries runs out or the DCAM3 falls and crashes on the asteroid. Total size of image data is estimated to be approximately 5 Gbits with image compression.

In this presentation, we show the science and the development status of the DCAM3 scientific part.

Hayabusa-2 sampler: Surface variety of near-Earth C-type asteroid

Shogo Tachibana^{1*}, Hiroataka Sawada², Ryuji Okazaki³, Yoshinori Takano⁴, Chisato Okamoto², Hajime Yano², Kosuke Kurosawa², Koji Wada⁵, Hayabusa-2 sampler team²

¹Department of Natural History Sciences, Hokkaido University, ²Japan Aerospace Exploration Agency, ³Department of Earth and Planetary Sciences, Kyushu University, ⁴Japan Agency for Marine-Earth Science and Technology (JAMSTEC), ⁵Planetary Exploration Research Center, Chiba Institute of Technology

Samples from C-type asteroids, which are abundantly present in the asteroid belt and of which reflectance spectra resemble those of carbonaceous chondrites, may well preserve the information covering the long history of the solar system, compared to other bodies such as comets and Itokawa-like bodies. Their scientific values will be significantly increased for return samples obtained with detailed geological contexts. Moreover, surface samples from near-Earth C-type asteroids will provide insights into the space weathering of C-type asteroids and the surface thermal processes due to irradiation of sunlight, which cannot be obtained from meteorites and interplanetary dust particles. The Hayabusa-2 is a sample return mission from a near-Earth C-type asteroid 1999JU3 (2014-2020). Here we describe a sampling system of the Hayabusa-2 spacecraft to obtain samples from multiple surface locations of the asteroid with minimal contamination and a possible sampling strategy.

Keywords: Hayabusa-2, asteroid, sample return, space exploration

International Campaign of (162173)1999 JU3 Lightcurve Observation


Sunao Hasegawa^{1*}, KURODA, Daisuke², Masateru Ishiguro³, Hayabusa 2 Ground-based Observation Sub-group⁴

¹Japan Aerospace Exploration Agency, ²National Astronomical Observatory of Japan, ³Seoul National University, ⁴

The observations were carried out at 32 nights during 2011-2012 apparition using 13 telescopes. The telescopes we used are as follows: the University of Hawaii 88-inch (2.2-m), Lulin Observatory (1.0-m), Nishi-Harima Astronomical Observatory Nayuta telescope (2.0-m), Himalayan Chandra Telescope (2.0-m), Tenagra II (0.8-m), Bosque Alegre (1.5-m), Magellan Baade (6.5-m), Calar Alto (1.2-m), Tubitak Ulusal Goklemevi (1.0-m), MOA-I and II (0.6-m and 1.8-m), IRSF (1.4-m) and ESO/MPI (2.2m). We would like to emphasize that low solar phase angle (Sun-Asteroid-Observer's angle) data were acquired during 2011-2012 apparition which were not covered by 2007-2008 data. The new data sets enable to derive the accurate absolute magnitude and albedo.

(162173) 1999 JU3 (hereafter 1999 JU3) is a target asteroid of Hayabusa 2 sample return mission. The primary goal of the mission is to bring back samples from a C-type asteroid, which is considered to contain organics and hydrous minerals. It is scheduled to launch in 2014 arrive at 1999 JU3 in 2018. Some physical properties of 1999 JU3 were determined during the last apparition in 2007-2008. It is classified into C-type asteroid through optical spectroscopic observations (Binzel et al. 2001; Vilas 2008). Lightcurve observations indicated that 1999 JU3 has a synodic rotational period of 7.6272 ± 0.0072 hr (Abe et al. 2008). From the mid-infrared observations, it was found that the asteroid has an effective diameter of 0.87 ± 0.03 km (Muller et al. 2011). The pole orientation derived by the lightcurve observations still has a large uncertainty (Kawakami 2009; Muller et al. 2011). We had another observational opportunity in 2011-2012 when the apparent magnitude was bright enough to derive absolute magnitude and lightcurve with 1-2 m class telescopes. Since this is the last observational opportunity before the spacecraft launch, we, Hayabusa 2 Ground-based Observation group, conducted a global observational campaign to acquire the optical magnitude. In this presentation we report the results based on the campaign data.

We analyzed the photometric data using IRAF. As the results, we firstly derived the synodic rotational period of 7.631 ± 0.0072 hr. The result coincides with the previous result to an accuracy of our measurement. We found that the amplitude of the lightcurve was subdued with an amplitude of ~0.05 mag. Because the amplitude had been always small regardless of the observing angles (parameterized by 'phase-angle-bisector'), 1999 JU3 must have nearly spherical shape, which make us difficult to determine the pole orientation. In collaboration with experts in asteroid shape model and thermal model, Dr. J. Durech and T. Muller, some physical parameters were studied using our data. As the results, it is found that (i) the absolute magnitude is 19.20±0.12, (ii) the geometric albedo is 0.057±0.025 typical for C-type asteroids, (iii) and the thermal inertia is 200±100 [J m⁻² s^{-0.5} K⁻¹] with the combination of mid-infrared data. As of 2013 February, we could not get conclusive result for the pole orientation, although the inclined pole solutions show better match to the observational data.

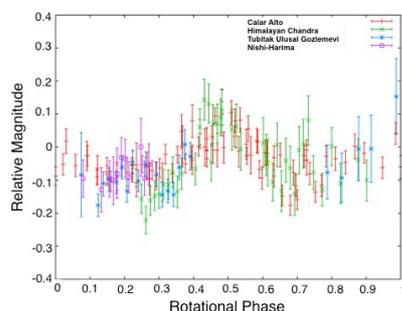

Ground-based observations of visible spectroscopic properties of 1999 JU3

Seiji Sugita^{1*}, Daisuke Kuroda², Shingo Kameda³, Sunao Hasegawa⁴, Shunichi Kamata¹, Takahiro Hiroi⁵, Masanao Abe⁴, Masateru Ishiguro⁶, Naruhisa Takato², Makoto Yoshikawa⁴

¹University of Tokyo, ²NAOJ, ³Rikkyo University, ⁴JAXA, ⁵Brown University, ⁶Seoul University

Asteroid 1999 JU3 is among the few C-type asteroids that can be reached with small delta-V from the Earth. This makes this asteroid a very attractive target for a near future sample-return mission. In fact, 1999 JU3 is currently chosen for the primary exploration target of JAXA's Hayabusa 2 and the secondary target for both OSIRIS-REx mission by NASA and Marco-Polo mission by ESA. Thus, detailed investigation of this NEA is very important for near future planetary mission projects.

In particular, both spatial inhomogeneity and temporal variation in the spectral properties of the mission target NEA would give a large impact on remote sensing strategy and sampling site selection processes. In this study, we observe visible spectrum of 1999 JU3 over multiple spin phases to examine how much spatial inhomogeneity is present and analyze newly obtained and literature spectrum of 1999 JU3 closely to infer material properties.

A series of visible spectroscopic observations of 1999 JU3 were conducted with the 8.1-m-aperture Gemini-South telescope in Chili using GMOS instrument on June 24, 26, and July 5. The apparent visible magnitude of 1999 JU3 was between 19.13 and 19.66 during our observations. The phase angle was relatively small between 22.7 and 30.3 deg. Two standard stars (HD142801, SA107-998) were used for calibration. Although the three observations cover a wide rotational phases, the observation on July 5th suffered from background star contamination.

The comparison between meteorites and the great variety of 1999 JU3 spectra reveal that the spectrum observed by Binzel et al. (2001) in May 1999, that by Vilas (2008) in Sept. 2007, and those in this study in June to July 2012 can be fit well by Murchison chondrite samples heated at different temperatures ranging from 650 to 900 deg.

Keywords: asteroids, reflectance spectroscopy, Hayabusa-2 mission, remote sensing, primitive bodies

Interdisciplinary science of Hayabusa 2 mission

Sei-ichiro WATANABE^{1*}, Naoki Kobayashi², Masaki Fujimoto², Hayabusa 2 Interdisciplinary Science Team³

¹Nagoya University, ²JAXA/ISAS, ³Hayabusa 2 Science Team

The Hayabusa 2 mission, an asteroid exploration rendezvousing at a C-type near-Earth asteroid 1999 JU3, dropping off an explosively formed impactor colliding the surface to excavate a crater, and retrieving samples of the surface to the earth, is now developing the spacecraft and payload instruments aiming at a proposed launch in December 2014. The payload scientific instruments are a near IR spectrometer (NIRS3), a thermal IR imager (TIR), an optical navigation camera (ONC-T), a laser altimeter (LIDAR), a sampler (SMP), a small carry-on impactor (SCI), a separation digital camera (DCAM-D), and a small lander (MASCOT). ONC-T is a multi-band imager with seven band-pass filters (one of which is a narrow band-pass Na D line filter). MicrOmega, a hyperspectral microscope mounted on MASCOT, has a resolution of 20 um and covering wavelength from 0.9 to 3.5 um. Observation, experiments, and sampling by Hayabusa 2 needs a sound base of integrated science through each instrument.

In succession to activities of the Hayabusa 2 Task Force under the ISAS Space Science Committee, the Hayabusa 2 project set up the Interdisciplinary Science Team in the end of 2012. The objectives of the team are (1) drawing the entire picture of sciences of the mission, (2) finding cross-cutting themes derived from integration of scientific data by each instrument, (3) clarifying scientific constraints on mission scenario in process of creation, and (4) expanding the range of the project science under the mantra of "planetary science from asteroids".

The agenda is as follows: the method of selection of touch-down points from remote-sensing data, scientific strategy according to possible surface conditions of the asteroid, observation planning of the SCI crater, strategy for analyses of retrieved samples, refinement of the mission scenario, modeling of the origin and evolution of 1999 JU3 (by solar system dynamics and observational facts), mechanism of material transfer from the Main Belt to the earth.

Keywords: asteroids, 1999 JU3, remote sensing, cosmic and planetary material science, science of collision phenomena, planetary exploration

Evolution of small bodies: The role of collision

Akiko Nakamura^{1*}

¹Department of Earth and Planetary Sciences, Kobe University

Collisions change the mass distributions of small bodies. When two small bodies collide, they will become bound to form a bigger body, lose mass by fragmentation and ejection, or be disrupted into smaller pieces. It has been recognized that larger rocky bodies are weaker due to a larger probability of relatively weak cracks. However, observational data indicate that small bodies have various porosities suggesting that they have experienced various degrees of thermal metamorphism and aqueous alteration. We conducted laboratory collisional disruption experiments for rock and homogeneous porous targets by changing the size scale of the target and projectile. Our porous target showed no obvious size dependence in the disruption threshold, in contrast to a size-dependent disruption threshold for the rock targets. If this tendency can be applied to the evolution of small bodies, it could be that mass distributions with different thermal metamorphism stages or different degrees of aqueous alteration evolved along different evolutionary tracks or different timescales.

Collision modifies the structure of small bodies. Collisions initiate and promote crack growth and consequently reduce the strength of the small bodies. Collisions make the small bodies more compact and reduce the porosity. They also increase the temperature of a body and cause it to lose porosity and gain strength via thermal evolution. Collisional disruption and re-accumulation can even change a continuum body into a granular, rubble-pile body.

Collision changes the surface material of small bodies. Mature surface materials exposed to interplanetary space are ejected by collision, refreshing the surface. Collision brings exotic material to the surface as seen on the surface of Asteroid 4 Vesta and the spatial variation of surface material. Vibration produced in a rubble-pile body by collision induces migration and segregation of grains on the surface. Eventually, it may modify the reflectance spectrum and thermal emission of the surface.

Here we discuss our current understanding of the above three roles of collision in small body evolution and discuss this alongside recent results of laboratory experiments.

Keywords: small bodies, collision, evolution

Collisional fragmentation and dynamics of asteroids, and the solar system origin revealed by them

Hiroshi Kobayashi^{1*}

¹Nagoya University

Planets are formed via collisions of kilometer size of larger planetesimals such as asteroids. Collisional outcomes (coagulation or fragmentation) are very important to reveal the origin of the solar system. In spite of many efforts, we still have uncertainty of collisional physics for such large bodies. The size distribution of bodies are affected by collisional outcomes and hence the size distribution of asteroids may give a clue to clarify collisions of such large bodies and the origin of the solar system.

Keywords: Origin of the solar system, asteroids, collisional physics, dynamics

Material diversity of C-type asteroids with reference to their reflectance spectra

Tomoki Nakamura^{1*}, NAKATO Aiko², MISU Takaaki¹, MATSUOKA Moe¹, WAKITA Shigeru³, HIROI TAKAHIRO⁴, SASAKI Sho³

¹Tohoku University, ²University of New Mexico, ³National Astronomical Observatory of Japan, ⁴Brown University

The target asteroid of Hayabusa 2 mission is Near-Earth asteroid 162173 (1999JU3) with a size of 0.87 +/- 0.03 km and a low albedo 0.070 +/- 0.006 (Muller et al. 2011). It is a C-type asteroid whose reflectance spectrum shows a 0.7 micron absorption band (Vilas, 2008), similar to CM-type carbonaceous chondrite meteorites. However, recent telescopic observations of JU3 failed to detect the 0.7 micron band, which probably indicates material diversity of the JU3 surface.

In the early solar system, rocky particles were accreted with icy particles to form C-type asteroids. Internal heating due to the decay of short-lived radionuclide ²⁶Al has taken place within 5 million years after the birth of CAIs and molten ice to facilitate water-rock reactions. The deeper portions of the asteroids suffered high temperature heating and thus heavy aqueous alteration, while shallow layers experienced low-degree of alteration at low temperatures. This leads to the formation of zoned structure from heavily altered interior to weakly altered surface. The aqueous alteration reactions ceased sometime between 10 to 100 million years after CAI formation.

However, if we assume that JU3 formed with a size of 1km, which is comparable to current size, at 2 Myr after CAI formation, the internal temperature cannot reach melting temperature of ice by the decay heat of ²⁶Al. In this case, aqueous alteration has never taken place in JU3, which contradicts the detection of hydrous minerals from JU3. Therefore, JU3 might have been much larger than current size when it formed and later disaggregated. This suggests that JU3 is a rubble pile asteroid and the zoning structure of alteration is expected to observe.

During 4.6 billion years after formation, surfaces of JU3 have been subject to impacts. Dust particles, the largest population is 200 microns, and solar winds continuously hit the surface of the asteroids, which results in changes of materials, called "Space weathering". We have simulated dust-particle impacts on C-type asteroids experimentally. Pulse laser heating on the CM chondrite surfaces succeeds to reproduce "blueing" of the reflectance spectra (Matsuoka et al. 2013), which is observed from space-weathered C-type asteroids. The blueing agents are probably nano-particles of iron sulfides and amorphization of Fe-rich serpentine.

Along with micrometeorite bombardments, large scale impacts occur occasionally on the asteroids which leads to devolatilization of hydrous material. In fact, many C-type asteroids show reflectance spectra similar to dehydrated carbonaceous chondrites. Recent mineralogical investigation of such dehydrated CM chondrites revealed a wide variation of mineralogy in terms of dehydration (Nakato et al. 2013).

Keywords: Reflectance Spectra, C-type asteroids

Post-Hayabusa2 mission

Makoto Yoshikawa^{1*}, Hajime Yano¹, Ryosuke Nakamura², Shuji Matsuura¹, Shogo Tachibana³, Ryu Funase⁴, Osamu Mori¹

¹JAXA, ²National Institute of Advanced Science and Technology, ³Hokkaido University, ⁴The University of Tokyo

Hayabusa mission was finished and Hayabusa follow-on mission Hayabusa2 has started. Hayabusa2 will be launched in 2014 and come back to the earth in 2020. And now, we are planning a mission next to Hayabusa2. A few years ago, we already studied post-Hayabusa2 mission, which was called Hayabusa-Mk2. It was a sample return mission from a D-type asteroid or a dormant comet, such as Wilson-Harrington. We made a mission plan. However, the situation has changed now and we are reconsidering this plan. The new plan that we are studying now is a mission to Trojans. In this presentation, we summarize the current study about this new idea.

Keywords: Asteroid, Exploration, Hayabusa

Scientific Observations during Cruising and Rendezvous Phases of the Solar Power Sail

Shuji Matsuura¹, Hajime Yano^{1*}, Daisuke Yonetoku², Takeshi Takashima¹, Masaki Fujimoto¹, Sho Sasaki³, Fumi Yoshida³, Eiichiro Kokubo³, Naruhisa Takato³, Ryosuke Nakamura⁴, Makoto Yoshikawa¹, Ryu Funase⁵, Osamu Mori¹

¹ISAS/JAXA, ²Kanazawa University, ³NAOJ, ⁴AIST, ⁵University of Tokyo

Following successful demonstration of deep space solar sail technique by IKAROS, the solar power sail is a deep space probe with hybrid propulsion of solar photon sail and ion engine system that will enable Japan to reach out deep interplanetary space beyond the main asteroid belt. For over the last decade, we have been investigating interdisciplinary space science areas that will benefit respective scientific premises from such a deep space observation platform mainly during its cruising phase. They include: (1) infrared astronomy to observe the first generation stars as the IR cosmic background radiation being discriminated from the foreground scattering of zodiacal light due to (2) cosmic dust, which at the same time hit a large cross section of the solar sail membrane dust detector, concentrating inside the main asteroid belt, and (3) gamma-ray astronomy to identify burst sources by taking advantage of an extremely long baseline with the terrestrial observatories as counterparts. Recently, the mission design has extended from cruising and fly-by only to rendezvous and sample return options from Jovian Trojan asteroids, en route Jovian gravity assist. Then, scientific observation opportunities gain for (4) Jovian magnetosphere interacting with the solar wind, (5) multiple flybys of asteroids at the main belt and the Jovian Trojan region, and (6) semi-intact sampling of both interplanetary dust at 5.2 AU heliocentric distance and surface compositions of a most-likely D-type asteroid in the Trojan clan. We also investigate possible synergy effects among these interdisciplinary observation plans and respective available instruments, such as IR and dust, gamma-ray and solar wind.

Keywords: Solar Power Sail, Infrared Astronomy, Gamma-ray Astronomy, Zodiacal Light Dust, Jovian Magnetosphere, Jovian Trojan Asteroids

IKAROS and Solar Power Sail Mission for a Round Trip to Outer Solar System


Osamu Mori^{1*}, FUNASE, Ryu², TSUDA, Yuichi¹, SAIKI, Takanao¹, SHIRASAWA, Yoji¹, MIMASU, Yuya¹, KAWAGUCHI, Junichiro¹, YOSHIKAWA, Makoto¹, YANO, Hajime¹, NAKAMURA, Ryosuke³, MATSUURA, Shuji¹, YONETOKU, Daisuke⁴

¹JAXA, ²University of Tokyo, ³AIST, ⁴Kanazawa University

A Solar Sail is a space yacht that gathers energy for propulsion from sunlight pressure by means of a membrane. A solar sail can move forward without consuming propellant as long as it can generate enough energy from sunlight. A Solar Power Sail is a Japanese original concept that gets electricity from thin film solar cells on the membrane in addition to acceleration by solar radiation. The Japan Aerospace Exploration Agency (JAXA) made the world's first solar power sail demonstration of photon propulsion and thin film solar power generation during its interplanetary cruise by IKAROS (Interplanetary Kite-craft Accelerated by Radiation Of the Sun).

A solar power sail craft can save the fuel using a solar sail and it can also gain the necessary electric power using a vast area of thin film solar cells on the membrane even when it is away from the sun. It can be a hybrid propulsion system with a solar sail by activating the ultra-high specific impulse ion engines with the power generated by thin film solar cells. This paper proposes an solar power sail mission for a round trip to outer solar system. It demonstrates a variety of key technologies requisite for future outer solar system exploration as well as solar power sail technology. This innovative spacecraft is used not only for the cruise science observation but for dust in the outer solar system and Trojan asteroids sample return for the first time in the world.

Keywords: Solar sail, Solar power sail, Outer solar system, Round trip, Sample return

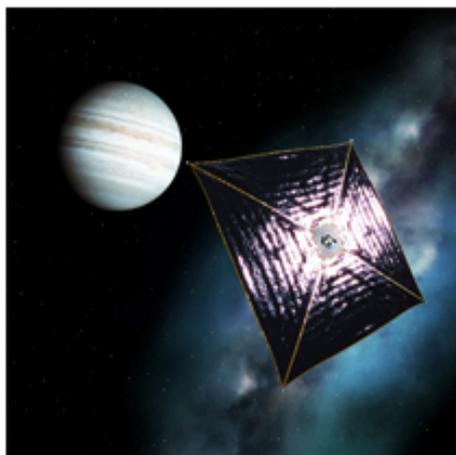

U07-P01

Room:Convention Hall

Time:May 19 18:15-19:30

Pronunciations of the names of the minor solar system bodies

Isao Sato^{1*}

¹JANNET

Result of the research of pronunciations of comets, asteroids, and satellites in 20 years are presented. Especially, hearing research of pronunciation of the comets appeared in the past are completed. Pronunciation of named asteroids are researched for more than a half of them.

Keywords: minor solar system bodies, pronunciation



Ground calibration impact experiments on arrayed large-area dust detector for interplanetary space onboard IKAROS

Chisato Okamoto^{1*}, YANO, Hajime¹, TANAKA, Makoto², HIRAI, Takayuki³, HASEGAWA, Sunao¹, TABATA, Makoto¹, OGAWA, Junko¹, IWAI, Takeo⁴, OKUDAIRA, Kyoko⁵

¹Japan Aerospace Exploration Agency, ²Tokai University, ³The Graduate University for Advanced Studies, ⁴Tokyo University, ⁵The University of Aizu

IKAROS (Interplanetary Kite-craft Accelerated by the Radiation of the Sun) was successfully operated beyond its nominal operational period of 3-6 months from its launch in May of 2010, in deep space between the Earth and Venus orbits. Arrayed Large-Area Dust Detectors in INterplanetary Space (ALADDIN) were attached on the anti-Sun face of its 7.5-micron thick polyimide sail membrane of IKAROS. The dust detectors are made up of 8 channels of 9-20 micron-thick PVDF (ALDN-S) with effective detection area of 0.54m² to detect hypervelocity impacts of micrometeoroids. Impact signals from PVDF are sent to electronic unit which filters thermal and vibration noises and records impact time, peak voltage and relaxation duration of each impact signal.

ALADDIN continuously measured heliocentric flux variance of cosmic dust from inside the orbit of the Earth to the vicinity of Venus in 2010-2011. The flux trends is well consistent with the data of Helios in 1970's and Galileo in 1990's. We conducted ground calibration impact experiments to evaluate cosmic data from ALADDIN. Impact experiments simulating collision of micrometeoroids on ALDN-S were performed using two-stage light gas gun at JAXA. We obtained impact signals on PVDF at various particle sizes and impact velocities.

Geological features and surface processes on saturnian small satellites

Naoyuki Hirata^{1*}, Hideaki Miyamoto¹

¹The University Museum, The University of Tokyo

Gas giants have numerous small satellites, which are expected to have environments similar to asteroids and comets in terms of such as the tiny gravity, icy surface compositions, and the deficiency in endogenic processes. Therefore, studies of these small satellites can contribute to understand the evolutions of asteroids and comets and can be regarded as an important clue of formations and evolutions of solar system and gas giant systems. After Cassini arrivals at Saturn in 2004, Cassini obtains numerous high-resolution images of Saturnian small satellites. In this presentation, based on our finding and analyses, we focus on the geological features and surface processes of Pan, Daphnis, Atlas, Janus, Epimetheus, Methone, Pallene, Telesto, Calypso, and Helene.

Pan, Daphnis, and Atlas are located at the main ring region, which holds the satellite system with the most inner orbit of the Saturn system. Their shapes are close to a disc-like ellipsoid, which is explained to be formed by the accumulation of main ring particles. Their surfaces show an unusual smoothness without craters or grooves. We newly find the existence of an impact crater on Atlas through our detail investigations. In addition, based on theoretical studies of electrostatic environments, their surfaces have the electrostatic potential enough to levitations of a particle on the surface due to the repulsion forces of electrostatic forces. As a result, we conclude that these satellites may have the resurfacing process due to dust levitation.

Helene is located at the E ring region, whose orbit is known as the leading trojan orbit of Dione. We find that this satellite has a hemispheric dichotomy; its trailing hemisphere has numerous impact craters close to the saturated-condition, while its leading hemisphere is deficient of impact craters. Also, the leading hemisphere of Helene shows numerous gully-like depressions. We develop the shape and gravitational conditions of Helene, where we find that these gully-like depressions strictly follow the local gravitational slopes ranging from 7 to 20 degrees. This indicates that these features are depositional and formed by gravity-induced mass movements. Also, these hemispheric dichotomy can be explained by the accumulations of the E ring materials erupted by the cryovolcanic activity of Enceladus. We find that Telesto, Calypso, Pallene, and Methone, which are also located at the E ring region, are also affected by the E ring, as well as Helene. As a result, based on the total amount and the density of craters on the E ring deposits of satellites, we conclude that the cryovolcanic activity on Enceladus has a short lifetime, possibly only several My.

Janus and Epimetheus are small inner satellites known as the co-orbital satellites. Their surfaces have numerous impact craters with near-saturated conditions, which indicates that these objects are old satellites in Saturn system. Through detailed investigations of high-resolution images, we newly find both satellites consist of the distinct two terrains, such as dark and bright terrains. The dark terrains distribute on the gravitational lowlands and each dark terrain is isolated over all the satellite, which shows the pond-like appearance. The difference between the nature of dark terrains of Janus and Epimetheus cannot be identified in terms of (1) a surface flatness or smoothness, (2) an albedo, which is darker than surrounding bright terrains, (3) an existence as deposits on lower land, and (4) a sharpness of the boundary between darker terrains and surrounding bright terrains. We find that almost all dark terrains on Janus appear to exist at the equatorial region of anti-Saturn side and almost all dark terrains on Epimetheus at the south polar region. As a result, we conclude that these distributions of dark terrains can be explained by the coefficient with the Janus-Epimetheus ring system.

Keywords: Saturn system, small satellite, ring, geological feature

Cratering experiments of porous surface in strength regime using low density impactors

Shunya Harada^{1*}, Takaya Okamoto¹, Takanobu Aoki¹, Akiko Nakamura¹

¹Graduate School of Science, Kobe University

The Cassini spacecraft has obtained the high resolution images of small impact craters of saturnian satellites. Some of the satellites have low mean density, $\sim 1 \text{ g/cm}^3$, so these are considered to be the ice-rock bodies. For example, Iapetus has a density of $\sim 1.1 \text{ g/cm}^3$ and has been taken images of the surface by Cassini down to the resolution limit of $\sim 10 \text{ m/pixel}$.

The surface of these bodies is considered to have been covered with regolith layer formed by fallen debris of impact ejecta. The layer gained porosity in the reaccumulation process. If the regolith layer contains fine icy debris, it would have strength by sintering. It is likely that temperature increase or compaction due to further impact advances sintering of regolith layer.

In this study, we conducted cratering experiments to investigate the cratering formation process on porous surface in strength regime. In order to prepare targets with different porosity and strength, we sintered 55 micron diameter hollow sphere soda-lime borosilicate glass with varying sintering temperature to attain porosity of 73-94% and strength of 0.6-1.9MPa. Impactors were sintered soda-lime borosilicate glass spheres ($\sim 1.3 \text{ g/cm}^3$) and porous alumina spheres ($\sim 1.8 \text{ g/cm}^3$) to simulate low density bodies. Impact velocity was 100-300 m/s. We used a small gas gun at Kobe University in this study.

In this study, penetration hole was formed on the target of porosity 94%. Hole depth decreased as target porosity decreased and finally a bowl-shaped crater was formed on the target of porosity 74%. On the other hand, hole diameter was constant and approximately the same with the diameter of the projectile over the parameter range of this experiment.

We will compare the results with previous study and discuss the cratering formation process on porous surface of small bodies.

Keywords: porosity, strength, ice-rock body, satellite, impact experiment

Present status of international announcement of opportunity for research of Hayabusa-returned samples

Toru Yada^{1*}, Masanao Abe¹, Tatsuaki Okada¹, Masayuki Uesugi¹, Yuzuru Karouji¹, Yukihiro Ishibashi¹, Shogo Yakame², Masaki Fujimoto¹, Makoto Yoshikawa¹

¹Japan Aerospace Exploration Agency, ²Graduate school of Science, University of Tokyo

Since Hayabusa spacecraft returned its reentry capsule to the Earth in June 2010, particles captured in its sample catcher have been recovered and described initially by an optical and an electron microscope [1].

Some parts of the described particles were distributed to the Hayabusa sample preliminary examination team (HASPET) and analyzed for their chemistries, tomographies, mineralogies, and oxygen isotope compositions to be indicated that they were comparable to equilibrated LL chondrites [2-5]. They were also analyzed by a transmission electron microscope (TEM) and showed amorphous textures on their surface layers caused by space weathering [6]. Additionally, they were analyzed by a noble gas mass spectrometer and clarified that they had been exposed to solar and galactic cosmic ray and their duration were supposed to be short as less than 3Ma [7]. All of these results indicate that the silicate particles recovered from the catcher originated from the asteroid Itokawa.

Total number of recovered and initially described particles counts up to 430 thus far. Three fourths of them are silicate particles, which are supposed to be originated from Itokawa. We have not recovered particles totally from the catcher yet, and are planning to finish total sample recovery in the middle of fiscal year of 2015.

Based on the memorandum of understanding agreed with NASA, 15% of the recovered samples should be distributed for international announcement of opportunity (AO) for research. JAXA organized the international AO committee and the committee published the first international AO from Jan. to Mar. in 2012. 17 research groups from seven countries were selected for the AO research in Jun. 2012 and totally 65 Itokawa particles had been distributed to them until Nov. 2012. Thus far, they are under investigation and their results will be presented in the first Symposium of Hayabusa, extraterrestrial material and exploration, planning to be held in JAXA Sagami-hara campus in Oct. 2013. And the second international AO has been published from Jan. to Mar. 2013. Selected research groups will be announced in Jun. 2013, and their sample distribution will be performed until the end of Aug. 2013.

References: [1] Yada T. et al. (2013) *Meteoritics Planet. Sci.*, in print. [2] Nakamura T. et al. (2011) *Science*, 333, 1113. [3] Yurimoto H. et al. (2011) *Science*, 333, 1116. [4] Ebihara M. et al. (2011) *Science*, 333, 1119. [5] Tsuchiyama A. et al. (2011) *Science*, 333, 1125. [6] Noguchi T. et al. (2011) *Science*, 333, 1121. [7] Nagao K. et al. (2011) *Science*, 333, 1128.

Keywords: Hayabusa, Itokawa, curation, international announcement of opportunity, meteorite, LL chondrite

Analysis of The Asteroid Itokawa Surface Spectra Using Principal Component Analysis

Sumire Koga^{2*}, Kazuhiro Isashiki¹, Seiji Sugita²

¹Dept. Sci., Univ. Tokyo, ²Dept. Complexity Sci. and Engr. Univ. Tokyo

Analysis of Asteroid Itokawa Surface Spectra Using Principal Component Analysis

Objective

The Hayabusa Spacecraft Asteroid Multi-band Imaging Camera (AMICA) obtained high spatial resolution images of asteroid Itokawa.

In this study, we performed principal component analysis (PCA) using these multi-band images of Itokawa. Such analysis method is useful for analysis of Hayabusa-2 as well as First Hayabusa.

Methods

A series of images taken from approximately the same position were used for analysis. They were calibrated, ratio images of the calibrated image were made and used for PCA. PC coefficients and the proportion of variance was calculated. Also, the correlation between curvature (Cv) and inclination (Rw /Rb) of the reflectance spectrum, each of which is known as one of indice of space weathering, is confirmed.

Results and discussion

The proportion of variance of PC1 and PC2 was calculated to be about 60-70 % and 20-30 %.

It was conjectured that PC1 means the degree of spaceweathering from its coefficients, and was also implied to be plausible by matching to Previous resurch[1]. However, the significance of PC2 is not clear yet. Possible candidates are heterogeneity in composition, particle size, noise, or effect of the incompleteness of corregistration.

A positive correlation between Cv and Rw/Rb were found. However, the correlation is not very tight; further study for the large scatter is needed.

There are dark boulders called "Black Boulders" on the "head" of Itokawa[3]. While the other parts made one cluster in PC1 vs PC2 plot, the Black Boulder was plotted out of the main cluster. It is a good example that shows the effectiveness of PCA.

Conclusion and future work

We performed PCA for the Itokawa surface spectra. It was well implied that PC1 means the degree of space weathering. PC1 vs PC2 plot let us find that Black Boulder is peculiar easily. These shows the effectiveness of PCA. Though the meaning of PC1 is easy to understand, we have to examine what PC2 means.

References

- [1] Ishiguro et al. 2007, MAPS 42, 1791.
- [2] Ishiguro et al. 2010, Icarus 207, 714.
- [3] Hirata & Ishiguro 2011, 42nd LPSC (2011).

Keywords: asteroid, visible spectroscopy, space weathering

Scientific observation plan for Hayabusa-2 visible multi-band cameras

Seiji Sugita^{1*}, Rie Honda², Shingo Kameda³, Tomokatsu Morota⁴, Hiroataka Sawada⁵, Chikatoshi Honda⁶, Hidehiko Suzuki³, Kazunori Ogawa⁵, Kei Shirai⁵, Manabu Yamada⁷, Ryosuke Nakamura⁸, Hayabusa-2 ONC Science Team⁵

¹University of Tokyo, ²Kochi University, ³Rikkyo University, ⁴Nagoya University, ⁵JAXA, ⁶Aizu University, ⁷Chiba Institute of Technology, ⁸AIST

The Hayabusa-2 spacecraft will carry an optical navigation camera (ONC) system, consisting of a telescopic camera (ONC-T) with a filter wheel and two wide-angle cameras (ONC-W1 and -W2). We are planning to conduct a variety of scientific observation of the target asteroid 1999JU3 using ONC from a wide range of distances, including the home position (~20 km) to a touch down on the asteroid surface. This paper summarizes the ONC science observations, particularly multi-band imaging spectroscopic observations based on recent ground-based telescopic observations of the mission target asteroid.

Keywords: asteroid mission, primitive bodies, Hayabusa-2 mission, remote sensing, reflectance spectroscopy, instrument development

Calibration of Asteroid Explorer Hayabusa-2 ONC (Optical Navigation Camera)

Masaki Sato^{1*}, TAKEI, Akito¹, Yuichiro Cho², Hidehiko Suzuki¹, Manabu Yamada³, Shingo Kameda¹, Hayabusa2 ONC team⁴

¹Rikkyo University, ²The University of Tokyo, ³Chiba Institute of Technology, ⁴JAXA

The Asteroid Explorer Hayabusa succeeded in returning samples from the S-type asteroid Itokawa. Building upon the technology obtained by Hayabusa, its successor, Hayabusa-2, will visit the C-type asteroid 1999JU3.

One of the differences between S-type and C-type asteroids is the degree of thermal metamorphism present in the asteroid, with a lesser degree of metamorphism in C-type asteroids. From this perspective, a C-type asteroid is a more primitive body and is considered to contain more organic or hydrated minerals. Hayabusa-2 will retrieve samples from the surface of asteroid 1999JU3, which are predicted to be consistent of the non-advanced metamorphic nature of C-type asteroids.

Reflectance spectra of asteroid 1999JU3 were acquired from ground-based observations. These show an absorption feature centred near 700 nm that is commonly seen in hydrated minerals. However, it is possible that hydrated minerals are not distributed throughout the asteroid's surface. To select a suitable landing point, it is necessary to observe the presence or absence of absorption features centred near 700 nm even after the launch to identify areas containing hydrated minerals.

Observations for the landing point selection will be conducted using an Optical Navigation Camera (ONC). An ONC contains three cameras, ONC-W1, ONC-W2, and ONC-T. ONC-W1 and ONC-W2 are wide-angle cameras, and ONC-T is a telescopic camera. In ONC-T, there is a filter wheel, which consists of seven bandpass filters (390 nm, 480 nm, 550 nm, 589.5 nm, 700 nm, 860 nm, 950 nm) and a sheet of glass. Rotation of this filter wheel facilitates spectroscopic observations. A suitable landing point will be selected based on these observations.

In preparation for the optical calibration test of the flight model, we prepared the calibration camera and filter for the ONC. After calculating the luminance on the surface of 1999JU3 and measuring the filter transmittance, we conducted sensitivity calibrations, and flatness measurement and determined the point spread function (PSF) as preliminary experiment.

Based on these preliminary experiments, we conducted the optical calibration test of the flight model. This presentation will show the result of the preliminary experiments and the optical calibration test of the flight model.

An observation performance study of NIRS3 on Hayabusa-2 based on low temperature examination data for InAs detector

Yusuke Nakauchi^{1*}, Kohei Kitazato², Takahiro Iwata³, Shuji Matsuura³, Makiko Ohtake³, Masanao Abe³

¹The Graduate University for Advanced Studies School of Physical Sciences, ²University of Aizu, ³JAXA

The Near Infrared Spectroscopy (NIRS3) will be equipped to survey hydrated mineral on an asteroid in the next mission : Hayabusa2. It will provide the data for selecting the sampling positions, making global map of abundance of water and observing difference of surface minerals. The reflectance spectra of minerals have absorption features in the visible and near infra-red region. For example, near 2.7um region has many absorption features related to hydroxyl stretching and H₂O bending, and near 1.9um and 3.0um region have bending of molecular H₂O. The absorption near 1.9um is weaker than near 3.0um. In addition, the feature near 1.9um is more vulnerable to heat than near 3.0um.

One of the scientific objective of the NIRS3 is to determine the amount of water and hydrated minerals. It requires the enough quality for remote sensing to extract both strong and weak absorption features from the data, thus we designed the signal to noise ratio (SNR) of more than 50.

This SNR mainly depend on performance of devices. The performance of InAs linear image sensor used NIRS3 has been measured in the factory, however the operating temperature during the measurement was higher than estimated actual one. So we confirmed performance of engineering model (EM) and flight model(FM) under -70°C.

The total performance of observation of NIRS3 has been considered based on environmental test for EM sensor until now, and the SNR has not reached 50. The major factor in decreasing SNR is fluctuation in the dark current. If we could not achieve that required SNR, we were required changing the sampling methods of signal or optical design or temperature setting.

Recently, the FM sensor was supplied and we did same test with EM sensor. This examination shows that FM sensor has smaller noise and dark current than EM's. Furthermore, the deference of FM sensor arrays sensitivity was smaller than EM's. Thus we compared the quality of EM and FM, and considered SNR which will be obtained on mission.

Keywords: Hayabusa-2, NIRS3, asteroid, 1999JU3, spectro, near infrared

Measuring Albedo of C-type Asteroid with LIDAR onboard HAYABUSA2 Spacecraft

Shinsuke Abe^{1*}, Fumi Yoshida², Hirotomoto Noda², Ryuhei Yamada², Sho Sasaki², Noriyuki Namiki³

¹Department of Aerospace Engineering, College of Science and Technology, Nihon University, ²National Astronomical Observatory of Japan, ³Planetary Exploration Research Center, Chiba Institute of Technology

Hayabusa-2 is an asteroid sample return mission of JAXA/ISAS (Japan Aerospace eXploration Agency/Institute of Space and Astronautical Sciences) which will be launched in 2014, will explore a near-Earth asteroid (162173) *1999 JU3* in 2018, and will back to the Earth in 2020. LIDAR (laser altimeter) is one of five instruments onboard *Hayabusa-2*, and is used to measure distance between the spacecraft and the surface of the target asteroid. LASER pulse measuring from 25km to 30 m distances emits at the wavelength of 1.06 micron. LIDAR will be used as not only navigation instrument on the spacecraft but also scientific experiments such as measuring local landscape, albedo, dusts, gravity and shape of the asteroid.

Considering ground-based spectroscopic & lightcurve observations of *1999 JU3*, other C-complex main-belt asteroids, and laboratory experiments of carbonaceous chondrites, several science topics related to albedo of C-type asteroid obtained by LIDAR and other instruments onboard *Hayabusa-2* will be discussed. For example, surface albedo heterogeneity, space weathering, and associated main-belt asteroid families. Albedo heterogeneity of S-type asteroid Itokawa obtained by LIDAR and NIRS (Near-InfRared Spectrograph) on *Hayabusa-1* will be shown.

Keywords: asteroids, Hayabusa, LIDAR, albedo, space weathering, carbonaceous chondrites

Development of MASCOT (Mobile Asteroid Surface Scout) small lander on Hayabusa2

Tatsuaki Okada^{1*}, HO, Tra-Mi², MASCOT team²

¹Institute of Space and Astronautical Science, JAXA, ²German Aerospace Center

The small lander MASCOT (Mobile Asteroid Surface Scout) is being developed for HAYABUSA2 under the international collaboration among DLR (Germany), CNES (France), and JAXA (Japan). It aims to investigate with high accuracy and spatial resolution the surface geomorphology, the minute structure, texture and composition of rocks, and the thermal and magnetic properties of C-class asteroid. Characteristics and status of the lander is briefly reported.

MASCOT has been tested for its performance, functions, and tolerance under mechanical and thermal-vacuum environmental conditions using Engineering model. It has been verified in component tests as well as initial integration test of Hayabusa2.

A 10kg-class lander is being considered with 3kg for science instruments. A wide angle multi-band imager CAM and a visible-infrared hyperspectral Microscope MicrOmega, multi-wavelength thermal radiator MARA, and fluxgate magnetometer MAG are the science payloads. With these instruments, the lander will conduct its stand-alone surface science of geology and geophysics, obtain geologic context for sample return, and measure composition and mineralogy as groundtruth for remote sensing. The lander will strengthen and complete the science of HAYABUSA-2 complementary to remote sensing and analysis of returned samples.

Keywords: Hayabusa2, asteroid, lander, hyperspectral microscope, thermal radiometer

Dynamical simulation of microgravity rovers

HARADA, Toshihiro¹, Kohei Kitazato^{1*}

¹University of Aizu

We developed a dynamics simulator of microgravity rover for small body exploration. Surface exploration using rovers are expected to return scientific discoveries yet to be made, and for them the global and long-term operations and tactical planning are needed. However, gravity fields of small bodies are not uniform due to their irregular shapes so that it is difficult to analytically predict the rover's motion. Thus, physical-based simulation for microgravity rovers is required.

We designed the simulator to have functions to estimate the rover trajectory based on rigid-body dynamics and to visualize the trajectory data on the shape model of small body. The graphical interface has been built in to support the usability. In addition, we performed a comparative experiment in laboratory to verify the simulation of rigid-body's rebound motion.

Finally we examined characteristics of rover motion using Itokawa's shape model. As a result, we found that the rover's motion would converge for shape models of less than approximately 5-m resolution.

Keywords: simulation, dynamics, rover, Hayabusa-2

A study on a low-cost deep space exploration mission utilizing a small kick stage

Toshinori Ikenaga^{1*}, UTASHIMA, Masayoshi¹, ISHII, Nobuaki¹, Makoto Yoshikawa¹, HIRAIWA, Tetsuo¹, NODA, Atsushi¹

¹Japan Aerospace Exploration Agency

This study aims to realize low-cost deep space exploration missions utilizing dual launch system equipped with a small kick stage, and flexible orbit design method using a concept of interplanetary parking orbit.

In this study, it is assumed that 800 kg dual launch system consisting of 500 kg deep space explorer and 300 kg small kick stage is launched together with a primary payload into geo-stationary orbit, GTO, whereupon the small kick stage is initiated at perigee to inject the deep space explorer i.e. Mars explorer into an orbit whose orbital energy, C3, is almost zero. Then the on-board ion engine system, IES, accelerates the explorer through the electric delta-V Earth gravity assist, EDVEGA, scheme to increase the Earth relative velocity at the Earth re-encounter point, which enables the explorer to inject into Mars transfer orbit after the Earth gravity assist. The Japanese H-2A 206 has ability to launch a 6 ton payload into GTO, accordingly, the 800 kg dual launch system assumed in this study can be launched together with about 5 ton of primary payload.

Throughout the simulations conducted in this study, it is revealed that the assumed dual launch system can send the 500 kg deep space explorer equivalent to HAYABUSA-2 to Mars. The dual launch system suggested in this study has possibility to decrease the cost and increase the opportunity of deep space exploration missions. However, the launch window, which is critical for deep space missions, is severely constrained in this launch configuration because the launch epoch is determined by the requirement of the primary payload. To solve this problem, this study suggest a concept of interplanetary parking orbit to increase the flexibility of deep space orbit design and to widen the launch window.

Keywords: small kick stage, dual launch system, low-cost deep space exploration, electric propulsion, interplanetary parking orbit

Asteroid Shape Reconstruction using Structure from Motion

Yohei Mori^{1*}, Naru Hirata¹, Hirohide Demura¹

¹The University of Aizu

A shape model of an asteroid is important for science analysis on exploring missions. In the Hayabusa mission, three models of asteroid Itokawa were reconstructed by different methods [M. Maruya, 2006], [H. Demura, 2006], [R. Gaskell, 2006]. A more precise model was reconstructed that have 3 millions or more polygons used multi-image photogrammetry after the mission [M. Maruya, 2006]. For the Hayabusa 2 project, a shape model of an asteroid 1999JU3 is also required. It must be investigated what reconstruction method is good. We focus on a method called Structure from motion (SfM) to achieve it. An open-source software Bundler [N. Snavely, 2006] implements SfM and Bundle adjustment [B. Triggs, 1999]. SfM is a method which uses multiple images to estimate real space coordinates of features in images and camera positions. Bundle adjustment is a kind of optimization method for non-linear model to estimate parameters on a geometric model precisely. A more precise result and less manual works are expected compared with ones in the Hayabusa mission by using and customizing the software. We reconstructed a shape model of Itokawa from 169 AMICA Images using this software. As a result, a sparse shape model is reconstructed successfully around equatorial region. However the number of points of polar regions are quite less than ones of equatorial region. This is caused by an insufficiency of images captured around a pole. We experimented this polar area observations using a shape model presented by [R. Gaskell, 2006]. In this experiment, we rendered the model and take images around of it with some longitude variations. One of the dataset is consists of images view from 30 degree longitude. The polar region is reconstructed successfully by inputting the dataset. And we also experimented with 70 degree and 80 degree longitude datasets for confirming the availability of Structure from Motion in the case of the rotation axis of 1999JU3 is parallel to the plane of revolution. The result was also good. Structure from Motion is useful for reconstructing asteroid shape model from multiple images. We are examining a method for quantitative evaluation of these results.

Keywords: Hayabusa, Hayabusa 2, 3D Shape Reconstruction

Gravity Estimation in Hayabusa2 Mission

Hitoshi Ikeda^{1*}, Koji MATSUMOTO², Hayabusa2 LIDAR Science Team³, Hayabusa2 Astrodynamics Team⁴

¹Japan Aerospace Exploration Agency, ²National Astronomical Observatory of Japan, ³Hayabusa2 LIDAR Science Team, ⁴Hayabusa2 Astrodynamics Team

The Japanese asteroid explorer Hayabusa2 will be launched in the mid-2010s to return samples from C-type near earth asteroid 1999JU3. During the rendezvous phase (i.e., proximity operation phase), we will make scientific observations to estimate physical parameters (e.g., gravity field, shape, pole direction, spin-rate, ephemeris) of the target body, which are very important not only for its scientific investigation but also for the spacecraft navigation. In particular, the mass is essential to perform a stable touch down sequence to collect samples from the asteroid's surface. We will attempt to estimate the gravity field of the target body using earth-based radiometric tracking measurements (2way Doppler and range) and spacecraft-based measurements (information from optical navigation camera and laser altimetry) with global parameter estimation technique. As the first step for the gravity field estimation, we performed a simulation study about mass estimation under simple configuration and evaluated the relation between the quality and quantity of measurements and the accuracies of estimation results. The detectability of the low degree and order gravity field coefficients is also investigated.

Keywords: gravity, orbit, small-body