

NASA Earth Science and Applications NASA Earth Science and Applications

Freilich Michael^{1*}
FREILICH, Michael^{1*}

¹Director, Earth Science Div. NASA Headquarters

¹Director, Earth Science Div. NASA Headquarters

Earth is a complex, dynamic system we do not yet fully understand. The Earth system, like the human body, comprises diverse components that interact in complex ways. We need to understand the Earth's atmosphere, lithosphere, hydrosphere, cryosphere, and biosphere as a single connected system. Our planet is changing on all spatial and temporal scales. The purpose of NASA's Earth science program is to develop a scientific understanding of Earth's system and its response to natural or human-induced changes, and to improve prediction of climate, weather, and natural hazards. A major component of NASA's Earth Science Division is a coordinated series of satellite and airborne missions for long-term global observations of the land surface, biosphere, solid Earth, atmosphere, and oceans. This coordinated approach enables an improved understanding of the Earth as an integrated system.

Over the coming decades, NASA and the Agency's research partners will continue to pioneer the use of both spaceborne and aircraft measurements to characterize, understand, and predict variability and trends in Earth's system for both research and applications. NASA Earth System Science conducts and sponsors research, collects new observations, develops technologies and extends science and technology education to learners of all ages. We work closely with our global partners in government, industry, and the public to enhance economic security, and environmental stewardship, benefiting society in many tangible ways. We conduct and sponsor research to answer fundamental science questions about the changes we see in climate, weather, and natural hazards, and deliver sound science that helps decision-makers make informed decisions. We inspire the next generation of explorers by providing opportunities for learners of all ages to investigate the Earth system using unique NASA resources, and our Earth System research is strengthening science, technology, engineering and mathematics education nationwide.

JAXAの地球観測衛星計画 JAXA's Earth Observation Missions

中村 健治^{1*}; 福田 徹²
NAKAMURA, Kenji^{1*}; FUKUDA, Toru²

¹JAXA / 獨協大学, ²宇宙航空研究開発機構

¹Earth Observation Research Center, Japan Aerospace Exploration Agency/Dokkyo University, ²Earth Observation Research Center, Japan Aerospace Exploration Agency

The Japan Aerospace Exploration Agency (JAXA) is promoting the Earth observation from space. JAXA is now operating GOSAT (the Green House Gases Observing Satellite) and GCOM-W1 (the Global Change Observation Mission 1st-Water). The GOSAT mission is a joint effort of JAXA, the National Institute for Environmental Studies (NIES) and the Ministry of the Environment (MOE). GOSAT has been launched in January 2009, and is equipped with the Fourier Transform Spectrometer and the Cloud Aerosol Imager providing global distribution of carbon dioxide and methane with seasonal changes. GCOM-W1 was launched in May 2012 for global water cycle observation and has the AMSR-2 (Advanced Microwave Scanning Radiometer 2). AMSR-2 follows the design of AMSR which was aboard ADEOS-2 satellite, but with improvements in antenna size and onboard calibration, etc. JAXA is also operating the Precipitation Radar (PR) aboard the TRMM (Tropical Rainfall Measuring Mission) satellite and Advanced Microwave Scanning Radiometer (AMSR-E) aboard Aqua satellite of the National Aeronautics and Space Administration (NASA). TRMM is a joint venture of JAXA and NASA. The TRMM satellite was launched in 1997 and is still in operation. The Precipitation Radar (PR) aboard the TRMM satellite is the first spaceborne radar dedicated for precipitation observation developed by JAXA and the National Institute of Information and Communications Technology, Japan (NICT). The data from PR for more than 16 years contributed much for better understanding the precipitation system climatology over tropical and subtropical regions. The Global Precipitation Measurement (GPM) which is led by JAXA and NASA with international collaboration is a multi-satellite system dedicated for the global precipitation observation. The core satellite of GPM will be launched by JAXA at the end of February 2014. JAXA has developed the dual-wavelength radar (DPR) with NICT for the GPM core satellite. DPR will observe rain including solid precipitation with better accuracy than TRMM PR. The ALOS-2 (Advanced Land Observing Satellite-2) which is equipped with an L-band Synthetic Aperture Radar (PALSAR) is scheduled to launch in 2014. ALOS-2 is a follow-on mission from ALOS contributing to cartography, disaster monitoring, resource survey, etc. EarthCARE for cloud and aerosol observation is a collaboration mission with the European Space Agency (ESA). JAXA has developed a W-band Cloud Profiling Radar (CPR) with NICT for EarthCARE. CPR has high sensitivity to clouds with Doppler function. Using the Doppler function CPR can measure the vertical movement of clouds which is important to understand the cloudy systems. JAXA is also developing GCOM-C1 (the Global Change Observation Mission 1st-Climate) which is for surface and atmospheric measurements related to the carbon cycle and radiation budget. An SGLI (Second Generation Global Imager) will be aboard the satellite. JAXA is also studying future sensors including small sensors for the International Space Station (ISS).

キーワード: 地球観測, 衛星, リモートセンシング
Keywords: Earth observation, satellite, remote sensing

GOSATによる5年間の定常運用期間における温室効果ガスの観測 Greenhouse gas observation by GOSAT during its five-year nominal operation period

横田 達也^{1*}; 菊地 信弘¹; 吉田 幸生¹; ブリル アンドレイ¹; オフシェプコフ セルゲイ¹; 井上 誠¹; 森野 勇¹; 内野 修¹; 金 憲淑¹; 高木 宏志¹; 齊藤 誠¹; Maksyutov Shamil¹; 幸 昭¹; 金 今 さやか¹; 河添 史恵¹; 網代 正孝¹
YOKOTA, Tatsuya^{1*}; KIKUCHI, Nobuhiro¹; YOSHIDA, Yukio¹; BRIL, Andrey¹; OSHCHEPKOV, Sergey¹; INOUE, Makoto¹; MORINO, Isamu¹; UCHINO, Osamu¹; KIM, Heon-sook¹; TAKAGI, Hiroshi¹; SAITO, Makoto¹; MAKSYUTOV, Shamil¹; YUKI, Akira¹; KANEKON, Sayaka¹; KAWAZOE, Fumie¹; AJIRO, Masataka¹

¹ 国立環境研究所

¹National Institute for Environmental Studies

The Greenhouse gases Observing SATellite (GOSAT) recently completed its planned nominal operation period of five years on 23 January 2014, and it now entered the phase of extended operation. During the past five years, almost all of the GOSAT standard data products were opened to general users. These data products are publicly available and can be obtained through the GOSAT User Interface Gateway (GUIG, <http://www.data.gosat.nies.go.jp/>). From the spectral data that GOSAT collected, the concentrations of major greenhouse gases (GHGs), namely carbon dioxide (CO₂) and methane (CH₄), were retrieved, and their precisions are now at the level of much less than 1%. These concentration data are used to estimate the monthly surface fluxes of CO₂ and CH₄ on sub-continental and ocean-basin scales. The data are also utilized to monitor GHGs' temporal and spatial changes. Various reports on the results of GOSAT data analysis have appeared in peer-reviewed journals so far. The topics reported include the detection of large GHG point sources and anomalies in the inter-annual trend of CO₂ uptake by terrestrial biosphere.

In this presentation, we will summarize the five-year-long GHG observation by GOSAT and present the global distributions of the GHG concentrations and the surface flux estimates. Also, we will touch on the current status of researches conducted within the framework of the GOSAT Research Announcement.

キーワード: 温室効果ガス, 二酸化炭素, メタン, カラム平均濃度, 収支量, 温室効果ガス観測技術衛星
Keywords: greenhouse gases, carbon dioxide, methane, column concentration, flux, GOSAT

The NASA Orbiting Carbon Observatory - 2 (OCO-2), the next step in CO₂ measurements from space

The NASA Orbiting Carbon Observatory - 2 (OCO-2), the next step in CO₂ measurements from space

Crisp David^{1*}
CRISP, David^{1*}

¹Jet Propulsion Laboratory, Caltech

¹Jet Propulsion Laboratory, Caltech

Global, space-based remote sensing observations of atmospheric carbon dioxide (CO₂) and methane (CH₄) hold substantial promise for future, long-term monitoring of these important greenhouse gases. These measurements will complement those from the existing ground based greenhouse gas monitoring network with increased spatial coverage and sampling resolution. The principle challenge for this approach is the high precision and accuracy needed to resolve the small (<0.3 percent) variations in the background distributions of these gases associated with their emission sources and natural sinks. The European Space Agency (ESA) EnviSat SCIAMACHY and Japanese Greenhouse Gases Observing Satellite (GOSAT) TANSO-FTS were the first two space-based sensors designed to return high resolution spectra of the reflected sunlight in molecular oxygen (O₂), CO₂, and CH₄ bands at near-infrared wavelengths. These spectra are being analyzed to yield spatially resolved estimates of the column-averaged CO₂ and CH₄ dry air mole fractions (X_{CO_2} , X_{CH_4}) over the sunlit hemisphere. The availability of these data has already enabled substantial improvements in instrument calibration techniques, remote sensing retrieval algorithms, and data validation techniques. However, sensors with greater sensitivity, coverage, and resolution are needed to implement the space-based segment of a global greenhouse gas monitoring system.

In July of 2014, these space-based greenhouse gas pathfinders will be joined by the NASA Orbiting Carbon Observatory-2 (OCO-2). This satellite will fly at the front of the 705-km Afternoon Constellation (A-Train), along an orbit track aligned with the ground footprints of the CloudSat radar and CALIPSO lidar. Its 3-channel, imaging, grating spectrometer has been optimized to record high resolution spectra of reflected sunlight in the 765 nm O₂ A-band and in the 1610 and 2060 nm CO₂ bands. Coincident O₂ and CO₂ spectra are combined into soundings that are analyzed with a full-physics retrieval algorithm to yield estimates of X_{CO_2} with accuracies exceeding 0.3 percent over most of the Earth. The OCO-2 spectrometer will collect up to 1 million of these soundings each day along a narrow ground track as it flies over the sunlit hemisphere. Between 20 and 30% of these soundings are expected to be sufficiently cloud free to yield full-column estimates of X_{CO_2} . Even with these assets, OCO-2 is still only a research satellite, designed to validate a space-based CO₂ measurement approach. A coordinated network of satellites with similar capabilities will be needed to discriminate and quantify the CO₂ emissions from fossil fuel combustion, land use practices, and other human activities in the presence of the much larger CO₂ fluxes associated with the natural carbon cycle.

キーワード: Carbon Dioxide, Greenhouse Gases, Remote Sensing, Orbiting Carbon Observatory - 2

Keywords: Carbon Dioxide, Greenhouse Gases, Remote Sensing, Orbiting Carbon Observatory - 2

国立環境研究所 GOSAT-2 プロジェクトについて NIES GOSAT-2 Project

松永 恒雄^{1*}; 森野 勇¹; 吉田 幸生¹; 齊藤 誠¹
MATSUNAGA, Tsuneo^{1*}; MORINO, Isamu¹; YOSHIDA, Yukio¹; SAITO, Makoto¹

¹ 国立環境研究所

¹National Institute for Environmental Studies

温室効果ガス観測技術衛星 GOSAT の後継機である GOSAT-2 は平成 19 年度の打上げを目指して、環境省・宇宙航空研究開発機構・国立環境研究所により現在開発が進められている。本発表では国立環境研究所 GOSAT-2 プロジェクトの活動計画等について紹介する。

キーワード: GOSAT, GOSAT-2, 衛星, 温室効果ガス
Keywords: GOSAT, GOSAT-2, satellite, greenhouse gas

衛星によるクロロフィル蛍光観測のための三次元植生放射シミュレータの開発 Development of a 3D solar induced chlorophyll fluorescence simulator for satellite fluorescence observation

小林 秀樹^{1*}; 永井 信¹; 井上 智晴¹; 市井 和仁¹
KOBAYASHI, Hideki^{1*}; NAGAI, Shin¹; INOUE, Tomoharu¹; ICHII, Kazuhito¹

¹ 独立行政法人 海洋研究開発機構

¹ Japan Agency for Marine-Earth Science and Technology

Recent studies show that the vegetation canopy scale chlorophyll fluorescence can be observed from satellite, such as GOSAT and OCO-2, using Fraunhofer lines (e.g. Frankenberg et al., 2011). Satellite-based fluorescence can be used to infer the photosynthetic capacity of plant canopy. To understand how the canopy scale bidirectional fluorescence observations are related to three-dimensional fluorescence distribution within a plant canopy, it is necessary to evaluate canopy scale fluorescence emission using a detail plant canopy radiative transfer model. In this study, we developed a three-dimensional plant canopy radiative transfer model that can simulate the bidirectional chlorophyll fluorescence radiance. This modeling was based on the 3D radiative transfer model, forest light environmental simulator (FLiES) (Kobayashi and Iwabuchi, 2008). FLiES is a Monte Carlo ray-tracing model to simulate radiative field in shortwave (solar domain) and long-wave (thermal infrared) radiation in 3D landscape. To realize individual tree crown shapes, the original FLiES model used geometric objects such as cone, cylinder, and spheroid. Recently, FLiES has been extending to utilize voxel-based tree crown datasets, which are favorable to LiDAR based tree crown data sets. In this presentation, we show the current status of the development of the 3D chlorophyll fluorescence simulator.

キーワード: GOSAT, 植生放射モデル, クロロフィル蛍光, GPP

Keywords: GOSAT, plant canopy radiative transfer model, chlorophyll fluorescence, GPP

全球降水観測計画/二周波降水レーダの軌道上初期機能確認状況 Orbital checkout status of the DPR on the GPM core spacecraft

小嶋 正弘^{1*}; 古川 欣司¹; 三浦 健史¹; 百束 泰俊¹; 改井 洋樹¹; 石切 孝之¹; 井口 俊夫²; 花土 弘²; 中川 勝広²; 奥村 実³

KOJIMA, Masahiro^{1*}; FURUKAWA, Kinji¹; MIURA, Takeshi¹; HYAKUSOKU, Yasutoshi¹; KAI, Hiroki¹; ISHIKIRI, Takayuki¹; IGUCHI, Toshio²; HANADO, Hiroshi²; NAKAGAWA, Katsuhiko²; OKUMURA, Minoru³

¹宇宙航空研究開発機構, ²情報通信研究機構, ³NEC 東芝スペースシステム株式会社

¹Japan Aerospace Exploration Agency, ²National Institute of Information and Communications Technology, ³NEC TOSHIBA Space systems

The Dual-frequency Precipitation Radar (DPR) on the Global Precipitation Measurement (GPM) core satellite was developed by Japan Aerospace Exploration Agency (JAXA) and National Institute of Information and Communications Technology (NICT). The GPM is a follow-on mission of the Tropical Rainfall Measuring Mission (TRMM). The objectives of the GPM mission are to observe global precipitation more frequently and accurately than TRMM. The frequent precipitation measurement about every three hours will be achieved by some constellation satellites with microwave radiometers (MWRs) or microwave sounders (MWSs), which will be developed by various countries. The accurate measurement of precipitation in mid-high latitudes will be achieved by the DPR. The GPM core satellite is a joint product of National Aeronautics and Space Administration (NASA), JAXA and NICT. NASA developed the satellite bus and the GPM microwave radiometer (GMI), and JAXA and NICT developed the DPR. JAXA and NICT developed the DPR through procurement. The contract for DPR was awarded to NEC TOSHIBA Space Systems, Ltd.

The configuration of precipitation measurement using an active radar and a passive radiometer is similar to TRMM. The major difference is that DPR is used in GPM instead of the precipitation radar (PR) in TRMM. The inclination of the core satellite is 65 degrees, and the flight altitude is about 407 km. The non-sun-synchronous circular orbit is necessary for measuring the diurnal change of rainfall similarly to TRMM. The DPR consists of two radars, which are Ku-band (13.6 GHz) precipitation radar (KuPR) and Ka-band (35.5 GHz) precipitation radar (KaPR). The objectives of the DPR are

- (1) to provide three-dimensional precipitation structure including snowfall over both ocean and land,
- (2) to improve the sensitivity and accuracy of precipitation measurement,
- (3) to calibrate the estimated precipitation amount by MWRs and MWSs on the constellation satellites.

The DPR consists of Ku-band (13.6 GHz) precipitation radar (KuPR) and Ka-band (35.5 GHz) precipitation radar (KaPR). The KuPR unit will measure 2.6m X 2.4m X 0.7m in size. The KaPR unit will measure 1.3m X 1.5m X 0.8m in size. Both KuPR and KaPR have almost the same design as TRMM PR. The DPR system design and performance were verified through the development test and the proto flight test. DPR has handed over to NASA and integration of the DPR to the GPM core spacecraft have completed in May 2012. GPM core spacecraft satellite system test has completed in November 2013. The results of the satellite system test concerning to the DPR satisfied system requirements.

GPM core observatory was shipped to Tanegashima Space Center, JAPAN and Launch Site Operations has started on November 2013 and GPM core observatory will be launched in February 2014. DPR orbital check out will be started in March 2014 and it will be completed in April 2014. The orbital check out status of DPR will be reported .

キーワード: 全球降水観測計画, 二周波数降水レーダ
Keywords: GPM, DPR

全球降水観測 (GPM) 計画研究プロジェクトの状況 Status of the Japanese Global Precipitation Measurement (GPM) Research Project

沖 理子^{1*}; 可知 美佐子¹; 久保田 拓志¹; 正木 岳志¹; 金子 有紀¹; 古川 欣司¹; 高藪 縁³; 井口 俊夫²; 中村 健治⁴
OKI, Riko^{1*}; KACHI, Misako¹; KUBOTA, Takuji¹; MASAKI, Takeshi¹; KANEKO, Yuki¹; FURUKAWA, Kinji¹; TAKAYABU, Yukari³; IGUCHI, Toshio²; NAKAMURA, Kenji⁴

¹ 宇宙航空研究開発機構, ² 情報通信研究機構, ³ 東京大学, ⁴ 独協大学

¹JAXA, ²NICT, ³University of Tokyo, ⁴Dokkyo University

The Global Precipitation Measurement (GPM) mission is a satellite program led by Japan and the U.S., to measure the global distribution of precipitation accurately in a sufficient frequency so that the information provided by this program can drastically improve hydrological predictions, climate modeling, and understanding of water cycles. The GPM Core Observatory carries the Dual-frequency Precipitation Radar (DPR) developed by Japan Aerospace Exploration Agency (JAXA) and the National Institute of Information and Communications Technology (NICT), and the GPM Microwave Imager (GMI) developed by the National Aeronautics and Space Administration (NASA). The frequent precipitation measurement about every three hours will be achieved by constellation satellites with microwave radiometers or microwave sounders, which will be developed by international partners. JAXA also provides the Global Change Observation Mission (GCOM) 1st ? Water (GCOM-W1) named "SHIZUKU," launched on May 18, 2012, as one of constellation satellites.

The Japanese GPM research project conducts scientific activities on algorithm development, ground validation, application research including production of research products. In addition to those activities, we promote collaboration studies in Japan and Asian countries, and seek potential users of satellite precipitation products. JAXA develops the DPR Level 1 algorithm, and the NASA-JAXA Joint Algorithm Team develops the DPR Level 2 and DPR-GMI combined Level2 algorithms. JAXA also develops the Global Rainfall Map algorithm, which is a new version of the Global Satellite Mapping of Precipitation (GSMaP), as one of national products to distribute hourly and 0.1-degree horizontal resolution rainfall map. In the GPM era, the GSMaP algorithm will be improved by refining rainfall retrievals over land, considered the orographic rainfall effects, added the rain gauge corrected rainfall product. In the future, information from the Dual-frequency Precipitation Radar (DPR) will be compiled as a database to improve the retrieval accuracy of weak rainfall in mid-to-high latitudes.

The GPM Core Observatory is scheduled to be launched from the JAXA Takengashima Space Center by the H-IIA F23 rocket around 3:07 a.m. thru 5:07 a.m. (JST) on February 28 (Fri.) 2014. After the initial checkout (about 2-month,) calibration and validation of the DPR, GMI and other products will be implemented toward the public release of all products to general users. Data release date is currently scheduled to be 6-month after the launch.

Keywords: GPM, DPR, GSMaP, ground validation

全球降水観測計画二周波降水レーダの初期検証結果 Initial validation results of Dual-frequency Precipitation Radar on Global Precipitation Measurement Core Observatory

久保田 拓志^{1*}; 井口 俊夫²; 瀬戸 心太³; 阿波加 純⁴; 瓜田 真司⁵; 吉田 直文⁵; 沖 理子¹

KUBOTA, Takuji^{1*}; IGUCHI, Toshio²; SETO, Shinta³; AWAKA, Jun⁴; URITA, Shinji⁵; YOSHIDA, Naofumi⁵; OKI, Riko¹

¹ 宇宙航空研究開発機構, ² 情報通信研究機構, ³ 長崎大学, ⁴ 東海大学, ⁵ リモート・センシング技術センター

¹Japan Aerospace Exploration Agency, ²National Institute of Information and Communications Technology, ³Nagasaki University, ⁴Tokai University, ⁵Remote Sensing Technology Center of Japan

The Global Precipitation Measurement (GPM) Mission consists of a Tropical Rainfall Measuring Mission (TRMM)-like non-sun-synchronous orbiting satellite (GPM Core Observatory) and a constellation of satellites carrying microwave radiometer instruments. The GPM Core Observatory, which will be launched in 28 February 2014, carries the Dual-frequency Precipitation Radar (DPR) developed by the Japan Aerospace Exploration Agency (JAXA) and the National Institute of Information and Communications Technology (NICT). The DPR consists of two radars; Ku-band (13.6 GHz) precipitation radar (KuPR) and Ka-band (35.55 GHz) radar (KaPR). The DPR is expected to advance precipitation science by expanding the coverage of observations to higher latitudes than those obtained by the TRMM Precipitation Radar (PR), by measuring snow and light rain via high-sensitivity observations from the KaPR, and by providing drop size distribution (DSD) information based on the differential scattering properties of the two frequencies. For operational productions of precipitation datasets, it is necessary to develop computationally efficient, fast-processing DPR Level-2 (L2) algorithms that can provide estimated precipitation rates, radar reflectivity factors, and precipitation information, such as the DSD and precipitation type. The L2 algorithms have been developed by the DPR Algorithm Development Team under the NASA-JAXA Joint Algorithm Team.

Before the launch of the GPM Core Observatory, synthetic DPR Level-1 (L1) data are needed as a test bed for the DPR L2 algorithms. In this work, we use data simulated from the TRMM/PR. The primary advantage is that measured Ku-band data from the TRMM/PR, obtained under a wide variety of meteorological conditions, forms the basis of the simulation. As such, the results can be compared directly to the standard TRMM/PR retrievals. Thus, "at-launch" codes of DPR precipitation algorithms, which will be used in GPM ground systems at launch, were evaluated using synthetic data based upon the TRMM/PR data. Results from the codes (Version 4.20131010) of the KuPR-only, KaPR-only, and DPR algorithms were compared with "true values" calculated based upon drop size distributions assumed in the synthetic data and standard results from the TRMM algorithms at an altitude of 2 km over the ocean. The results indicate that the total precipitation amounts during April 2011 from the KuPR and DPR algorithms are similar to the true values, while the estimates from the KaPR data are underestimated. By analysis results, the underestimation of the KaPR can be caused by a problem in the attenuation correction method. This was verified by the improved codes (Version 4.20131129), and so this problem has been resolved in the latest version.

After the launch, calibration and validation of the DPR products will be implemented toward the public release of all products to general users. Data release date is currently scheduled to be 6-month after the launch. In this work, we introduce initial validation results of the DPR-L2 product, mainly based upon comparisons of the TRMM/PR product.

キーワード: 全球降水観測計画, 二周波降水レーダ, アルゴリズム, 検証

Keywords: Global Precipitation Measurement, Dual-frequency Precipitation Radar, algorithm, validation

降水科学における全球降水観測計画（GPM）への期待 Expectations for the Global Precipitation Measurements for Precipitation Sciences

高藪 縁^{1*}; 沖 理子²; 井口 俊夫³; 青梨 和正⁴; 可知 美佐子²; 久保田 拓志²; 濱田 篤¹; 高橋 暢宏³; 中村 建治⁵
TAKAYABU, Yukari^{1*}; OKI, Riko²; IGUCHI, Toshio³; AONASHI, Kazumasa⁴; KACHI, Misako²; KUBOTA, Takuji²; HAMADA, Atsushi¹; TAKAHASHI, Nobuhiro³; NAKAMURA, Kenji⁵

¹ 東京大学大気海洋研究所, ² 宇宙航空研究開発機構, ³ 独立行政法人 情報通信研究機構, ⁴ 気象庁気象研究所, ⁵ 獨協大学
¹The University of Tokyo, ²Japan Aerospace Exploration Agency, ³National Institute of Information and Communications Technology, ⁴Meteorological Research Institute, Japan Meteorological Agency, ⁵Dokkyo University

Three dimensional precipitation data observed with Ku (13.8GHz) band Precipitation Radar (PR) on board the Tropical Rainfall Measurement Mission (TRMM) satellite have enabled us to discover various precipitation characteristics over the tropics and subtropics between 36N and 36S. Precipitation system regimes are estimated with precipitation characteristics. The multiple instrument observations of TRMM have also made us quantify the discrepancies between TRMM Microwave Imager (TMI) vs. PR estimated rainfall, and provided us with opportunities to investigate various approaches to improve the rainfall retrieval algorithms.

With the launch of the GPM/DPR, scheduled in February 2014, dual band measurements from space with Ku (13.6GHz) and Ka (35.5GHz) band frequencies will be started. Increasing information of the drop size distributions with DPR should improve the accuracy of precipitation profile structures, which are essential to study precipitation characteristics. GPM/DPR will provide excellent cross calibrations for constellation microwave observations to construct better mapping of precipitation from 65N to 65S, which covers 91% of the earth surface. Weak rainfall measurements will enable us better energy budget calculations after all, as well as more precise examinations of rainfall system lifecycles. We can also expect reexamination and further improvements of TRMM PR rainfall products by comparing Ku-band retrievals with DPR retrievals.

Three dimensional satellite measurement of precipitation at mid-to-high latitudes is a completely new scientific experiment. Since the precipitation systems there are very different from those in the tropics and subtropics, we can certainly expect further scientific discoveries to improve our knowledge of precipitation characteristics with thorough observations from the satellite. Using this outcomes, we also expect to provide useful knowledge to improve the numerical models for weather predictions and climate projections.

キーワード: 全球降雨観測計画, 二周波降雨レーダー, 降水科学, 熱帯降雨観測計画, 降雨特性, コンステレーション
Keywords: GPM, DPR, Precipitation Science, TRMM, precipitation characteristics, satellite constellation

The Global Precipitation Measurement (GPM) Mission: Advancing precipitation measurement for science and society
The Global Precipitation Measurement (GPM) Mission: Advancing precipitation measurement for science and society

KIRSCHBAUM, Dalia^{1*}
KIRSCHBAUM, Dalia^{1*}

¹NASA Goddard Space Flight Center

¹NASA Goddard Space Flight Center

Too much or too little rain can serve as a tipping point for triggering catastrophic flooding and landslides or widespread drought. Knowing when, where and how much rain is falling globally is vital to understanding how vulnerable areas may be more or less impacted by these disasters. Global Precipitation Measurement (GPM) is an international satellite mission to provide next-generation observations of rain and snow worldwide every three hours. The foundation of the GPM mission is the Core Observatory satellite provided by NASA and JAXA. This satellite, launching in early 2014, carries advanced instruments that will set a new standard for precipitation measurements from space. The Core satellite will measure rain and snow using two science instruments: the GPM Microwave Imager (GMI) and the Dual-frequency Precipitation Radar (DPR). The GMI captures precipitation intensities and horizontal patterns, while the DPR provides insights into the three dimensional structure of precipitating particles. Together these two instruments provide a database of measurements against which other partner satellites' microwave observations can be meaningfully compared and combined to make a global precipitation dataset.

Data collected from the Core satellite serves as a reference standard that will unify precipitation measurements from research and operational satellites launched by a consortium of GPM partners in the United States, Japan, France, India, and Europe. The GPM constellation of satellites can observe precipitation over the entire globe within 3 hours of acquisition. The GPM mission will help advance our understanding of Earth's water and energy cycles, improve the forecasting of extreme events that cause natural disasters, and extend current capabilities of using satellite precipitation information to directly benefit society.

二周波降水レーダ用の減衰補正手法の開発 Development of attenuation correction method for GPM/DPR

瀬戸 心太^{1*}; 井口 俊夫²
SETO, Shinta^{1*}; IGUCHI, Toshio²

¹ 長崎大学 大学院工学研究科, ² 情報通信研究機構

¹Graduate School of Engineering, Nagasaki University, ²National Institute for Information and Communications Technology

A new attenuation correction method is developed for the Dual-frequency Precipitation Radar (DPR) on the core satellite of the Global Precipitation Measurement (GPM) mission. Hitschfeld and Bordan's attenuation correction method (HB method) assumes relation between the specific attenuation k and the effective radar reflectivity factor Z_e (k-Ze relation) as $k=aZ_e^b$. The new method is based on HB method, but k-Ze relation is modified as $k=eaZ_e^b$ by using dual-frequency ratio of Z_e (DFR) and surface reference technique (SRT). Therefore, the new method is called HB-DFR-SRT method (H-D-S method in short). While the authors' previous attenuation correction method called HB-DFR method (H-D method in short) results in underestimation of precipitation rates for heavy precipitation, H-D-S method and its improved version try to correct the negative bias by means of SRT. When only single-frequency measurement is available, H-D-S method can be easily switched to HB-SRT method (H-S method in short), which is similar to the attenuation correction method used in the TRMM/PR standard algorithm.

The attenuation correction methods are tested with a simple synthetic dataset of DPR. As long as SRT gives the perfect estimates of path integrated attenuation (PIA) and the parameters of k-Ze relation (a and b) are given properly so that e could be vertically constant, H-S method is much better than the dual-frequency methods. In reality, SRT has error and we cannot give the parameters of k-Ze relation properly so that e should be vertically variable. Tests with SRT error and vertical variation of e show that H-D method is better than H-S method for weak precipitation but H-S method is better than H-D method for heavy precipitation. It is because SRT is unreliable for weak precipitation and DFR is unreliable for heavy precipitation. H-D-S method shows not the best but stable results for both weak and heavy precipitation, and it may work well for medium precipitation. Quantitative evaluation should be done with real measurement dataset of DPR.

キーワード: 二周波降水レーダ, 全球降水観測計画, 減衰補正
Keywords: DPR, GPM, attenuation correction

CloudSat と TRMM/PR を用いた降水の特徴の解析について Analysis of rain characteristics by using CloudSat and TRMM/PR

高橋 暢宏^{1*}
TAKAHASHI, Nobuhiro^{1*}

¹ 情報通信研究機構

¹National Institute of Information and Communications Technology

Spaceborne cloud/precipitation radars are suitable for understanding the global climate (especially precipitation in this study) that means both the average figure of the Earth climate and the local climate in the global climate. In terms of precipitation climatology, major parameters are the precipitation amount and its diurnal/seasonal changes as well as the drop size information that is a kind of proxy of the precipitation processes such as warm/cold rain. The purpose of this study is to develop the climate map of precipitation by using CloudSat that equips W-band (94 GHz) radar and TRMM/PR that equips Ku-band (13.8 GHz) radar; rain amount is estimated by the TRMM/PR level 2 product (2A25) and the drop size information is obtained by combining the CloudSat and TRMM/PR. The basic idea of the analysis method is to compare the histograms of radar reflectivity factor (Z) at near-surface range bin at the overlapping Z range (weak to moderate rain echo). Because the both satellites have different orbit, only the statistical approach is available. Since the different Mie scattering effect appears for the different frequency and drop size, the Z value of rainfall is different between w- and Ku-band radar observations and it reflects the difference in the histograms of w- and Ku-band. Based on these characteristics, drop size information is estimated by comparing the histograms. In this study, median diameter (D_0) is estimated. For the comparison of the estimation, D_0 is estimated by TRMM/PR only.

Climate data are created in 10×10 degrees in latitude and longitude boxes and each box consists of the unconditional and conditional rain rate (the former corresponds the rain amount) and D_0 (median diameter) both from the CloudSat-TRMM/PR combined analysis and TRMM/PR-only analysis for every seasons (DJF, MAM, JJA, and SON), diurnal cycle (night time/day time orbit) and over land or ocean.

The results show that the general characteristic of global maps of D_0 through the year and local time is apparent land-ocean contrast; larger D_0 appears over land and smaller D_0 appears over ocean except for relatively small D_0 over southeastern Asia to China. Also, relatively larger D_0 appears in tropical area and mid latitude summer. Diurnal change of D_0 can be seen by comparing the day/night time D_0 ; D_0 is larger in the night time over ocean while day time D_0 is larger over land. Tropical Ocean shows smaller seasonal change, while larger changes are seen over mid-latitude area. Comparison of the two estimates of D_0 between CloudSat-TRMM/PR combined estimation and TRMM/PR-only estimation.

Since the Dual-frequency Precipitation Radar (DPR) onboard Global Precipitation Measurement (GPM) core satellite, which is launched in February 2014, can estimate the drop size distribution (DSD), the approach in this study can be useful of evaluation of the algorithm for DSD estimation.

Keywords: rain, drop size distribution, CloudSat, TRMM

極端な降雨と極端な対流を伴う降水システムの地域・季節特性 Characteristic differences between the heaviest rainfall and the strongest convection

濱田 篤^{1*}; 高藪 縁¹

HAMADA, Atsushi^{1*}; TAKAYABU, Yukari¹

¹ 東京大学大気海洋研究所

¹ Atmosphere and Ocean Research Institute, The University of Tokyo

Regional and seasonal differences in the rain characteristics between rain-rate and convection extreme events are examined using 11-yr measurements from the Precipitation Radar (PR) onboard the Tropical Rainfall Measuring Mission (TRMM) satellite. After defining a rainfall event as a set of contiguous rainy pixels of TRMM PR measurements, three different types of regional extreme rainfall events are defined, using the maximum values of near-surface rainfall rate (NSR) and 30-dBZ echo top height (ETH30) in rainfall event; Rainfall events of which the maximum NSR is within top 0.1% at a grid but the ETH30 is not are defined as R-only extreme events, those of which the maximum ETH30 is within top 0.1% but the NSR is not are defined as H-only extreme events, and those of which both of the maximum NSR and maximum ETH30 are within top 0.1% are defined as RH extreme events. This is done on a local basis with 2.5 x 2.5 degree horizontal resolution to examine regional extreme events.

It is shown that the fractional occurrence of RH extreme events are less than 30% in most regions, indicating that only a few dozen percent of convection extremes are related to rain rate extremes. There are robust differences in echo profiles, rainfall characteristics, and local environments between R-only and H-only extreme events. These characteristic differences are basically independent on region and season, except for their seasonal occurrence. R-only extreme events exhibit lower echo-top height than H-only extremes, linear downward increase of radar reflectivity (Z_e) below freezing level, and sharp upward decrease of Z_e in 5-7 km, whereas H-only extreme events exhibit slight downward decrease of Z_e below freezing level. R-only extreme events are almost in phase with mean monthly rainfall, while H-only extremes tend to peak slightly out of phase with rainy season. Local environments related to R-only extremes are less convectively unstable, wetter in the low-middle troposphere, and larger moisture flux convergence in the lowermost troposphere, compared with those related to H-only extremes. The features related to R-only extreme events imply a dominance of warm-rain process.

キーワード: 降水, 極端現象, TRMM

Keywords: precipitation, extreme event, TRMM

次世代 GSMaP MWI 降水リトリバルアルゴリズム The next-generation GSMaP MWI precipitation retrieval algorithm

青梨 和正^{1*}
AONASHI, Kazumasa^{1*}

¹ 気象庁気象研究所

¹ Meteorological Research Institute Japan Meteorological Agency

1. はじめに

現状の GSMaP マイクロ波イメージャ (MWI) 降水リトリバルアルゴリズムは (Aonashi et.al 2009)、降水強度以外の物理量の MWI 輝度温度 (TB) への影響が大きい、弱い降水域でリトリバル精度が低下する。この問題に対処するため、本研究は、MWI TB から、降水強度を含む各種物理量をリトリバルするアルゴリズムを開発する。このアルゴリズムの基本的考え方は、Elsaessar & Kummerow (2008) や、Boukabara et.al (2011) と同様に、Bayes の定理に基づき、MWI TB から物理量の統計的な最尤値を求めることである。本研究では、物理量の非線形関数である TB から物理量をリトリバルするために、アンサンブルに基づく変分法 (EnVA) を採用する。このアルゴリズムは、降水域検出部分と、降水域に対して降水強度を含む物理量をリトリバルする部分から構成される。

今回は、降水域検出の部分について報告する。

2. 降水域検出部分の記述

降水域検出の部分では、非降水を仮定し、解析変数として、海上では (地表面温度 (Ts), 海上風速 (SSW), 雲水量 (CLWC)、可降水量 (PWC))、陸上では (Ts, 地表面射出率 (es)) を選択した。EnVA は、その第 1 推定値として雲解像モデル (CRM) 予報を使い、誤差共分散を CRM アンサンブル予報値から推定した。但し、Ts については、観測データを元にした統計値を使う。また、陸上の es については、名大データベースから作った統計値を使う。そして、EnVA が計算した MWI TB の innovation や post fit residual を使って、降水域の検出を行なった。

キーワード: GSMaP, MWI, GPM, GCOMW, 降水リトリバル
Keywords: GSMaP, MWI, GPM, GCOMW, precipitation retrieval

雨量計補正全球降水マップ (GSMaP Gauge) Gage Adjusted Global Satellite Mapping of Precipitation (GSMaP Gauge)

妻鹿 友昭^{1*}; 牛尾 知雄¹; 久保田 拓志²; 可知 美佐子²; 青梨 和正²; 重 尚一⁴

MEGA, Tomoaki^{1*}; USHIO, Tomoo¹; KUBOTA, Takuji²; KACHI, Misako²; AONASHI, Kazumasa²; SHIGE, Shoichi⁴

¹ 大阪大学工学研究科, ² 宇宙航空研究開発機構, ³ 気象研究所, ⁴ 京都大学理学研究科

¹Graduate School of Engineering, Osaka University, ²Japan Aerospace Exploration Agency, ³Meteorological Research Institute,

⁴Graduate School of Science, Kyoto University

Fresh water is one of the most important resources for human. Precipitation is the main source of fresh water. Precipitation is also heating atmosphere by latent heat and one of important energy transport mechanism of atmosphere. Knowledge of world precipitation activity is important information for not only human activity, but also earth science.

Passive Microwave Radiometer (PMR) is a small and low power consumption sensor, thus many space-borne PMRs observe precipitation from low earth orbit. Space-born PMR provides uniform quality and stable observation data all over the world. PMR have become the precipital sensors for global precipitation retrieval, since these emission and scattering signals have a more direct relationship with precipitation rates than infrared radiometer (IR). The Global Satellite Mapping of Precipitation (GSMaP) project is developing PMR algorithm to provide global precipitation map with space-born PMRs. The GSMaP's goal is to develop the algorithm of high precision and eventually to produce a global precipitation map with high temporal (one hour) and special resolution (0.1 degree). PMR swathes, however, do not cover all surface in one hour. Therefore, it is necessary to utilize a gap-filling technique to generate precipitation maps with high temporal resolution. GSMaP derives Moving Vector (MV) from two successive IR images. GSMaP algorithm interpolates precipitation between gaps when PMRs overpass successive swath with MV by Kalman-filter. GSMaP algorithm now produces 0.1-grid-resolution precipitation map every one hour. Some evaluations, however, show the tendency of underestimation compared to some ground based observations, because PMR precipitation estimation over land has difficulty due to emission variability in surface. Rain gauge provides reliable data, and a rain gauge collects precipitation for certain period at a fixed location. PMR observes signals from precipitation instantaneously. We are developing the GSMaP gauge adjusted product (GSMaP Gauge). The GSMaP Gauge algorithm fits the GSMaP precipitation map to NOAA Climate Prediction Center (CPC) global rain gauge data set. The CPC data set is provided daily with low resolution (0.5-grid-degree). Quality of the CPC data set is not uniform (Quality of gauge-based analysis depends on density of rain gauge). We fill the gap of the precipitation estimation between the satellite and rain gauge attributable to the retrieval difficulty, the spatial and temporal resolution difference. The GSMaP Gauge succeeded to reduce the under estimation of the GSMaP algorithm. In this presentation, we introduce the GSMaP Gauge and its performance.

キーワード: 降水, 衛星観測, マイクロ波, リモートセンシング

Keywords: Precipitation, Satellite observations, Microwave observations, Remote sensing

GCOM-W1 衛星搭載 AMSR2 プロダクトの現状 Current Status of the Products of AMSR2 on GCOM-W1 Satellite

沖 大幹^{1*}; 可知 美佐子²; 直木 和弘²; 堀 雅裕²; 前田 崇²; 今岡 啓治²
OKI, Taikan^{1*}; KACHI, Misako²; NAOKI, Kazuhiro²; HORI, Masahiro²; MAEDA, Takashi²; IMAOKA, Keiji²

¹ 東京大学生産技術研究所, ² 宇宙航空研究開発機構地球観測研究センター

¹Institute of Industrial Science, The University of Tokyo, ²Earth Observation Research Center, Japan Aerospace Exploration Agency

The Advanced Microwave Scanning Radiometer 2 (AMSR2), on board the first generation satellite of Global Change Observation Mission - Water (GCOM-W1 or "SHIZUKU") satellite, is multi-frequency, total-power microwave radiometer system with dual polarization channels for all frequency bands. The GCOM-W1 satellite was launched on May 18, 2012 (JST), and has started scientific observation since July 3, 2012. After the calibration and validation phase, which confirmed that all the pre-defined release accuracies are satisfied, the AMSR2 bright temperature product (Level 1) and geophysical parameter product (Level 2) were released to public since January 2013 and May 2013, respectively.

Monitoring and validation of the AMSR2 geophysical parameters have been continued for further improvements of the observation accuracy in future algorithms. For example, the precipitation product is validated by comparing with the Precipitation Radar (PR) on board the Tropical Rainfall Measuring Mission (TRMM) satellite, and relative errors were 48% over ocean and 88% over land for the period from September 1, 2012 to August 31, 2013.

Quality control (QC) of in-situ data is also improved for the better validation. New QC method for buoy data, which is used in the validation of the sea surface temperature (SST) and sea surface wind speed products, is introduced to remove unreliable in-situ observation data from comparisons, including overlap check, movement speed check, comparison with numerical model, and statistical check by Bayes' theorem. Those efforts will contribute to improve the algorithm for future version-up.

The AMSR2 standard products have been distributed through the GCOM-W1 Data Providing Service (<https://gcom-w1.jaxa.jp/>), and quick look of the products, browse images of all AMSR2 brightness temperatures and geophysical parameters are available at the JAXA Satellite Monitoring for Environmental Studies (JASMES) for Water Cycle (<http://kuroshio.eorc.jaxa.jp/JASMES/WC.html>).

キーワード: 地球観測, 水循環, 地球物理パラメータ, 検証, データ配布

Keywords: earth observation, hydrologic cycles, geophysical products, validation, data distribution

マイクロ波イメージャ観測の海上風向情報の大気湿度解析への利用 Applications of ocean surface wind direction signals in microwave imager observation for atmospheric humidity analysis

計盛 正博^{1*}

KAZUMORI, Masahiro^{1*}

¹ 気象庁

¹ Japan Meteorological Agency

An empirical relative wind direction (RWD) model function was developed to represent azimuthal variations of oceanic microwave brightness temperatures of vertical and horizontal polarizations. The RWD model function was based on measurements of observed brightness temperature from the Advanced Microwave Scanning Radiometer and wind vector from SeaWinds, both on board the Advanced Earth Observing Satellite - II, and Special Sensor Microwave Imager Sounder (SSMIS) first guess departure and wind vector data in European Centre for Medium-Range Weather Forecasts (ECMWF) Integrated Forecasting System. The model function was introduced to a microwave ocean emissivity model; a FAST microwave Emissivity Model (FASTEM) in a radiative transfer model for satellite radiance assimilation. Performances of the RWD model function were much more realistic than present azimuthal model functions in FASTEM for low wind speed and high frequency channels.

An assimilation experiment using the RWD model function was performed in the ECMWF system. The experiment demonstrated reductions of first guess departure biases arising from modelling of the azimuthal variations in areas of high wind speed and low variability of wind direction. For example, bias reductions in ascending and descending SSMIS 19 GHz vertical polarized brightness temperature in Somali jet at the Arabian Sea were approximately 0.6 K and 0.7 K. The bias reductions were found for all assimilated microwave imager channels in a wide wind speed range. Moreover, analysis increments of specific humidity in the lower troposphere were reduced (e.g., 0.3 g kg⁻¹ reduction at 1000 hPa in the Somali jet). We found improvements of relative humidity and temperature in short-range forecasts in the lower troposphere. The experiment results clearly showed the importance of modelling the azimuthal variation of emissivity for assimilation of microwave imager observations. The RWD model function should be included in the radiative transfer model used in the microwave radiance assimilation observation operator.

衛星マイクロ波観測による極域研究 Polar Research using Satellite Microwave Remote Sensing

榎本 浩之^{1*}; アリマス ヌアスムグリ¹; スーディック シルヴィアンヌ¹; 藤田 秀二¹; 矢吹 裕伯²; 杉村 剛¹; 杉山 慎³;
ホルムルンド ペレ⁴; イングバンダー スーザン⁴
ENOMOTO, Hiroyuki^{1*}; ALIMASI, Nuerasimuguli¹; SURDYK, Sylviane¹; FUJITA, Shuji¹; YABUKI, Hironori²; SUG-
IMURA, Takeshi¹; SUGIYAMA, Shin³; HOLMRUND, Per⁴; INGVANDER, Susanne⁴

¹ 国立極地研究所, ² 海洋研究開発機構, ³ 北海道大学低温科学研究所, ⁴ ストックホルム大学
¹National Institute of Polar Research, ²JAMSTEC, ³Hokkaido University ILTS, ⁴Stockholm University

Satellite Microwave remote sensing is the powerful tool to investigate polar regions. The data enables monitoring and surveying ice sheet, sea ice, snow cover conditions for large scale and continuous monitoring in the changing climate, and , and studying their changing mechanisms. Satellite passive microwave observation has almost 30-years long data set which contribute climatological study. The recent GCOM-W data is useful for more precise investigations.

For the Arctic study, GRENE Arctic climate research project(2011-2016) has started by integrating Japanese scientific activities. satellite microwave data is very important to this project since satellite data expands availability of site data to large area and long term. The Arctic project enhances interdisciplinary study and collaboration between modelling and observation. Multi-disciplinary information and scale-upping by satellite is very important.

キーワード: 極域, 北極, 南極, 雪氷, 衛星, マイクロ波

Keywords: Polar region, Arctic, Antarctic, Cryosphere, satellite, Microwave

AMSR-E データを用いて見積もった南極海沿岸ポリニヤにおける海氷生産量 Sea-ice production in Antarctic coastal polynyas estimated using AMSR-E data

二橋 創平^{1*}; 大島 慶一郎²

NIHASHI, Sohey^{1*}; OHSHIMA, Kay I.²

¹ 苫小牧工業高等専門学校 機械工学科, ² 北海道大学 低温科学研究所

¹Department of Mechanical Engineering, Tomakomai National College of Technology, ²Institute of Low Temperature Science, Hokkaido University

Coastal polynyas are newly-forming sea-ice areas formed by divergent ice drift due to prevailing winds and/or ocean currents. In coastal polynyas, huge amounts of heat flux from the ocean to the atmosphere occur because the heat insulation effect of sea-ice is greatly reduced in the case of thin ice, and accordingly sea ice is formed actively. Dense water formed in Antarctic coastal polynyas with the intense sea-ice production is a major source of Antarctic Bottom Water, which is a key player in the global climate system.

In this study, an algorithm for estimating daily thin ice thickness is developed based on a relationship between polarization ratios (PR) of AMSR-E brightness temperatures (TBs) and thermal ice thickness. The TBs at 89 GHz and 36.5 GHz are used. The thermal ice thickness is based on heat flux calculation using ice surface temperatures derived from satellite thermal infrared images. We used cloud-free MODIS images.

In the Antarctic Ocean, landfast sea-ice (fast ice), which is stationary sea ice attached to coastal features such as grounded icebergs, is formed along the coast. Antarctic coastal polynyas tend to be formed adjacent to fast ice. The AMSR-E ice thickness algorithm possibly mis-classifies fast ice as thin ice, because the PR values of thin ice and fast ice are similar. Thus, also the fast ice detection algorithm is developed. Monthly fast ice extent is detected based on microwave characteristics that the horizontally- and vertically-polarized TBs of fast ice tend to be lower than those of thin ice and are similar to those of ice sheet close to the coast.

The spatial resolution of AMSR-E is about 6.25 km, and the pixel density is four times higher than that of SSM/I which has been used in previous studies. This advantage is critical for the coincident detection and monitoring of coastal polynyas and fast ice because their areal extent is fairly small (tens to a hundred kms at most). The accuracy of the created AMSR-E dataset is validated from comparisons with backscatter images acquired by ASAR on Envisat.

Sea-ice production in Antarctic coastal polynyas is estimated based on heat flux calculation using the AMSR-E dataset. For the estimation, it is assumed that heat from the ocean below is negligible and that all of the heat loss to the atmosphere goes towards freezing. The sea-ice production estimated using the AMSR-E data has been improved from the SSM/I ice production because of the finer spatial resolution. First, the AMSR-E data can better resolve the high production area close to the coast. Second, false sea-ice production in the fast ice pixels mis-included by SSM/I is corrected because AMSR-E can detect fast ice that cannot be resolved by SSM/I. In fact, the total sea-ice production in each polynya by AMSR-E does not change much from the SSM/I ice production for many polynyas because these two effects of opposite direction compensate for each other. The AMSR-E dataset presented in this study would give the boundary/validation data of sea-ice production and fast ice for modeling studies.

キーワード: AMSR-E, 南極海, 沿岸ポリニヤ, 海氷生産量, 南極底層水

Keywords: AMSR-E, Antarctic Ocean, Coastal polynyas, Sea-ice production, Antarctic Bottom Water

A proposal of mission combining active and passive microwave sensors and its applications for global water cycle
A proposal of mission combining active and passive microwave sensors and its applications for global water cycle

江淵 直人^{1*}
EBUCHI, Naoto^{1*}

¹ 北海道大学低温科学研究所
¹Hokkaido University

A mission carrying active and passive microwave sensors is proposed to monitor the global water cycle and air-sea coupling. The passive microwave sensor will be a successor of AMSR2 on GCOM-W2, which was launched by JAXA on 12 May 2012. Channels to observe solid precipitation will also be added to AMSR2. The active sensor will be a scatterometer at operated at Ku- and Ka-bands. The Ka-band scatterometer can measure vector wind fields near the coasts with higher spatial resolution than the Ku-band scatterometer, which is similar to SeaWinds on QuikSCAT and ADEOS-II and OSCAT on Oceansat-2. Merits of the combination of the active and passive microwave sensors will be discussed in aspects of sensor and science synergisms. The microwave radiometer contributes to improve accuracy of vector wind measurements by the scatterometer under rain conditions. The wind direction provided by the scatterometer improves accuracy of the SST, water vapor and precipitation measured by the radiometer. The science synergy includes applications for studies of monsoon, tropical cyclones, air-sea coupling in various scales, global and regional water cycles, sea ice, soil moisture and snow over land.

キーワード: リモートセンシング, マイクロ放射計, マイクロ波散乱計, 全球水循環, 大気海洋相互作用
Keywords: remote sensing, microwave radiometer, microwave scatterometer, water cycle, air-sea interaction

Upwelling events at the western African coast related to atmospheric structures: An analysis with satellite observations

Upwelling events at the western African coast related to atmospheric structures: An analysis with satellite observations

DESBIOLLES, Fabien^{1*} ; BLANKE, Bruno¹ ; BENTAMY, Abderrahim²
DESBIOLLES, Fabien^{1*} ; BLANKE, Bruno¹ ; BENTAMY, Abderrahim²

¹Laboratoire de Physique des Océans (LPO), UMR 6523 CNRS-Ifremer-IRD-UBO, Brest, France, ²Laboratoire d'Océanographie Spatiale (LOS), IFREMER, centre de Brest, France

¹Laboratoire de Physique des Océans (LPO), UMR 6523 CNRS-Ifremer-IRD-UBO, Brest, France, ²Laboratoire d'Océanographie Spatiale (LOS), IFREMER, centre de Brest, France

Satellite scatterometers provide continuously valuable surface wind speed and direction estimates over the global ocean on a regular grid both in space and time. The Level 3 data derived from the Advanced Scatterometer (ASCAT), available at 1/4° spatial resolution (hereafter AS25), and Quick Scatterometer (QuikSCAT), available on 1/2° and 1/4° horizontal grids (QS50 and QS25 respectively), are studied at regional scales in both the Benguela and Canary upwelling systems. They are compared to the European Center for Medium-Range Weather Forecast surface wind analysis, with insight into their intrinsic and effective spatial resolutions. In the coastal band, the finest spatial patterns are found in the QS25 winds and are O(75km). This demonstrates the sensitivity of the high-resolution satellite-derived winds to coastal processes related to sea surface temperature (SST) perturbations and land-sea transition. More specifically, mesoscale coupling processes between SST and winds play a leading part in structuring the wind stress curl in both the Canary and Benguela upwelling systems. These processes act especially over the upwelling extension zone (O(100km) off the coast). Next, short-lived upwelling episodes (SUEs) calculated from SST anomalies are defined consistently with the QS25 effective resolution. These cold events refer to local, short-lived perturbations that add to seasonal upwelling variability. We characterize concomitant atmospheric synoptic conditions for SUEs identified at chosen latitudes and highlight two subregions in both upwelling systems, with contrasted patterns for the alongshore wind stress component and curl. The complexity of the latter patterns is closely linked to local, short-term SST variability. Closer to the shore, wind stress curl patterns derived from QS25 are only loosely related to SST/wind interactions and, as a working hypothesis, can also be associated with orographic effects that may play an important role in cooling processes. The derivation of a realistic coastal wind drop-off from satellite observations is an almost impossible task, first because a blind zone at the coast, second because the horizontal scales of pure orographic effects (a few tens of kilometers) are finer than the effective resolution of the satellite-derived product (~75km). However, an alternative assessment can be given by evaluating the ocean response to contrasted coastal wind profiles. Numerical sensitivity experiments show that the imbalance between Ekman transport and Ekman pumping has an impact on ocean dynamics: a reduction of the wind in the QS25 forcing, partly induced by orography, contributes to SST cooling.

キーワード: scatterometry, upwelling dynamics, SST/Wind Interactions, orography effects, air-sea coupling
Keywords: scatterometry, upwelling dynamics, SST/Wind Interactions, orography effects, air-sea coupling

The GNSS Ocean Winds and AIS Mission, An Earth Science and Marine Safety Satellite Constellation

The GNSS Ocean Winds and AIS Mission, An Earth Science and Marine Safety Satellite Constellation

Rose Randall^{1*} ; GLEASON Scott¹ ; RUF Christopher² ; KITAZAWA Yukihiro³ ; TANIMOTO Kazuo⁴
ROSE, Randall^{1*} ; GLEASON, Scott¹ ; RUF, Christopher² ; KITAZAWA, Yukihiro³ ; TANIMOTO, Kazuo⁴

¹Southwest Research Institute, ²University of Michigan, ³IHI Corporation, ⁴Meisei Electric Co., Ltd.

¹Southwest Research Institute, ²University of Michigan, ³IHI Corporation, ⁴Meisei Electric Co., Ltd.

Recent developments in electronics and nano-satellite technologies combined with modeling techniques developed over the past 20 years have enabled a new class of remote wave and wind sensing capabilities that offer markedly improved performance over existing observatories while opening avenues to new applications. Most existing space borne ocean wind observatories operate in the C and Ku-bands which obscures key information about the ocean and the global climate. Using GNSS-based bi-static scatterometry performed by a constellation of nano-satellites, ocean wave and wind data can be provided with unprecedented temporal resolution and spatial coverage across the full dynamic range of ocean wind speeds in all precipitating conditions.

The NASA Cyclone Global Navigation Satellite System (CYGNSS) is a space borne mission being developed to study tropical cyclone inner core processes. CYGNSS consists of 8 GPS bi-static radar receivers to be deployed on separate nano-satellites in October 2016. It is anticipated that numerous additional Earth science applications can also benefit from the cost effective high spatial and temporal sampling capabilities of GNSS remote sensing. These applications include monitoring of rough and dangerous sea states, global observations of sea ice cover and extent, meso-scale ocean circulation studies, and near surface soil moisture observations.

The Automatic Identification System (AIS) is a maritime system used for global identification and tracking of ships. It is proposed as part of the GNSS Ocean Winds and AIS (GOWA) nano-satellite constellation concept to combine and improve upon the GNSS remote sensing capability of CYGNSS with a space based AIS system. GOWA will be capable of monitoring both the ocean roughness and the locations of ship traffic at the same time. This will result in both an increase in maritime safety and valuable Earth science measurements of ocean winds, sea ice and land surfaces.

This presentation will present a summary of the CYGNSS mission and plans for future instrument development to increase the number of science observations. The goal of this development is to enable the GOWA mission being proposed for Japanese science and maritime safety applications.

キーワード: GNSS, Earth Science, Remote Sensing, Satellites, GPS

Keywords: GNSS, Earth Science, Remote Sensing, Satellites, GPS

雲エアロゾル放射ミッション (EarthCARE) 搭載用雲プロファイリングレーダ (CPR) の開発 Development of Cloud Profiling Radar (CPR) for Earth Clouds, Aerosols and Radiation Explorer (EarthCARE) mission

関 義広^{1*}; 富田 英一¹; 木村 俊義¹; 中塚 大貴¹; 会田 芳久¹; 岡田 和之¹; 飯出 芳弥¹; 門崎 学¹; 高橋 暢宏²; 大野 裕一²; 堀江 宏昭²; 佐藤 健治²

SEKI, Yoshihiro^{1*}; TOMITA, Eiichi¹; KIMURA, Toshiyoshi¹; NAKATSUKA, Hiroataka¹; AIDA, Yoshihisa¹; OKADA, Kazuyuki¹; IIDE, Yoshiya¹; KADOSAKI, Gaku¹; TAKAHASHI, Nobuhiro²; OHNO, Yuichi²; HORIE, Hiroaki²; SATO, Kenji²

¹ 宇宙航空研究開発機構, ² 情報通信研究機構

¹Japan Aerospace Exploration Agency, ²National Institute of Information and Communications Technology

Earth Clouds, Aerosols and Radiation Explorer (EarthCARE) is a Japanese-European collaborative Earth observation satellite mission aimed to deepen understanding of the interaction process between clouds and aerosols and its effects on the Earth's radiation. The outcome of this mission is expected to improve accuracy of the Global Climate Change prediction.

The EarthCARE spacecraft, which weighs approximately 2,250kg and goes along a Sun-Synchronous 400km-high orbit around the Earth, accommodates four instruments which are to observe the Earth's clouds, aerosols and radiation. The observation data acquired simultaneously by the four sensors will be processed into a variety of synergy products including vertical profiles of clouds and aerosols, microscopic cloud parameters, radiation fluxes and so on. As one of those observatories, the Cloud Profiling Radar (CPR), which has a 2.5m-diameter main reflector and W-band 1.5kW transmitter and receiver, is the world's first space-borne Doppler cloud radar jointly developed by the Japan Aerospace Exploration Agency (JAXA) and the National Institute of Information and Communications Technology (NICT), which provides vertical velocity as well as vertical structure inside clouds. The other payloads on the satellite are the Atmospheric Lidar (ATLID) for vertical structure measurement of clouds and aerosols, the Multi-Spectral Imager (MSI) for horizontal distribution measurement of clouds and aerosols, and the Broad-Band Radiometer (BBR) for measurement of radiation fluxes at top of the atmosphere. ATLID, MSI, BBR and the base-platform of the spacecraft are developed by the European Space Agency (ESA).

In Japan, the critical design review of the CPR has been completed in 2013 and CPR proto-flight model is currently being manufactured, integrated, and tested. After handed-over to ESA, the CPR will be installed onto the EarthCARE satellite together with the other instruments, tested, transported to Guiana Space Center in Kourou, French Guiana and launched by a Soyuz launcher in JFY2016.

Keywords: Cloud, Aerosol, Radiation, EarthCARE, CPR, Cloud Profiling Radar

Shortwave direct aerosol radiative forcing using CALIOP and MODIS measurements Shortwave direct aerosol radiative forcing using CALIOP and MODIS measurements

及川 栄治^{1*}; 中島 映至¹; Winker David²
OIKAWA, Eiji^{1*}; NAKAJIMA, Teruyuki¹; WINKER, David²

¹ 東京大学大気海洋研究所, ²NASA Langley Research Center
¹AORI, University of Tokyo, ²NASA Langley Research Center

The aerosol direct effect occurs by direct scattering and absorption of solar and thermal radiation. Shortwave direct aerosol radiative forcing (SWDARF) under clear-sky condition is estimated about 5 Wm^{-2} from satellite retrievals and model simulations [e.g., Yu *et al.*, 2006]. Simultaneous observations of aerosols and clouds are, however, very limited to validate the estimation of SWDARF under cloudy-sky condition. In 2006, the CALIPSO (Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations) satellite was launched with the space-borne lidar, CALIOP (Cloud-Aerosol Lidar with Orthogonal Polarization). This enabled us to get data of the vertical distribution of aerosols and clouds all over the world. Oikawa *et al.* [2013] estimated SWDARF under clear-sky, cloudy-sky, and all-sky conditions using CALIOP Version 2 data and MODIS (Moderate resolution Imaging Spectrometer) data. They investigated four scenarios for evaluating the SWDARF: clear-sky, the case that aerosols exist above clouds (above-cloud case), the case that aerosols exist below high-level clouds (below-cloud case), and the case that aerosols are not detected by CALIOP in cloudy-sky condition. The cloudy-sky SWDARF is, then, estimated by the latter three scenarios. The all-sky SWDARF is the combination of clear-sky and cloudy-sky SWDARF weighted by the cloud occurrence.

We calculated SWDARF from 2007 to 2009 using CALIOP Level 2 Cloud and Aerosol Layer Products Version 2 (V2) and Version 3 (V3) with the method of Oikawa *et al.* [2013]. The procedure of daytime calibration, cloud screening, and aerosol-cloud classification are improved in the V3 algorithms [Powell *et al.*, 2010; Vaughan *et al.*, 2010; Liu *et al.*, 2010]; therefore, the distributions of aerosols and clouds are significantly changed from V2 data. Compared V3 data with V2 data, the total cloud fraction and occurrence probability of above-cloud case decrease. In clear-sky condition, marine aerosols increase and single scattering albedo (SSA) of total aerosols increases over the ocean. In cloudy-sky condition, smoke and polluted dust decrease. Annual zonal averages of SWDARF from 60°S to 60°N under clear-sky, cloudy-sky, and all-sky are -2.85 , -0.16 , and -0.78 Wm^{-2} for V2 data and -3.70 , -1.07 , and -2.02 Wm^{-2} for V3 data. It indicates that SWDARF largely depends on the retrieval and classification algorithms of aerosols and clouds.

Previous studies reported that the aerosol absorption above clouds cause the underestimation of cloud optical thickness (COT) in the satellite retrievals [Haywood *et al.*, 2004; Coddington *et al.*, 2010]. We, therefore, have a plan to examine the effect on SWDARF from underestimation of COT.

Keywords: aerosol, radiative forcing, DARF, CALIPSO, CALIOP

雲水平不均質性に起因する雲特性リトリバルのバイアス誤差の推定手法
A new method for estimating biases in multi-spectral cloud parameter retrievals caused by cloud horizontal inhomogeneity

永尾 隆^{1*}; 中島 孝¹
NAGAO, Takashi^{1*}; NAKAJIMA, Takashi¹

¹ 東海大学
¹Tokai University

Clouds play an important role in terrestrial atmospheric dynamics, thermodynamics, and radiative transfer and are key elements of the water and energy cycles. Modification of cloud properties, lifetime, and amount by indirect aerosol effects has an effect on radiative forcing in the climate. Cloud observations using satellite-borne multispectral imagers (e.g. Aqua/MODIS, GCOM-C/SGLI and EarthCARE/MSI) provide data sets useful for understanding cloud characteristics and their distributions on a global scale. Previous studies, however, pointed out that cloud parameters (e.g. cloud optical thickness, cloud particle effective radius and cloud top temperature) retrieved from multispectral measurements were significantly impacted by vertical and horizontal inhomogeneities of clouds, bimodal particle size distributions in drizzling clouds, and three-dimensional radiative transfer. In this study, we suggest a new method for estimating bias in multi-spectral-retrieved cloud parameters caused by cloud horizontal inhomogeneity. The impact of cloud horizontal inhomogeneity is considered as a key for interpreting discrepancies between cloud parameters from satellite observations and in-situ measurements or numerical cloud models. The estimation method considers the bias as the combination of the following two impacts: One is the impact of clear-contamination in cloud pixel, which is parameterized by cloud-fraction. The other is the impact of subpixel scale variance of cloud properties (but no clear-contamination), which is parameterized by variance of multi-spectral radiances in sub-pixels, and based on error propagation theory. We evaluate the method by using high-spatial resolution measurements of Landsat 8. Additionally, to apply the method to several multi-spectral imagers (e.g. MODIS, GCOM-C/SGLI and EarthCARE/MSI), we also investigate co-variance matrices of adjacent pixels or sub-pixels obtained from different IFOVs because the accuracy of the method depends on the accuracy of the co-variance matrix.

三次元離散雲の放射収支算定に関わる放射伝達解法の研究 (2) A study of the earth radiation budget using a 3D Monte-Carlo radiative transfer code (2)

大方 めぐみ^{1*}; 中島 映至¹
OKATA, Megumi^{1*}; NAKAJIMA, Teruyuki¹

¹ 東京大学 大気海洋研究所

¹ University of Tokyo, Atmosphere and Ocean Research Institute

本研究は、Earth Explore/EarthCARE ミッションで打ち上げられる EarthCARE 衛星で、大気上端の放射フラックスを 10Wm^{-2} 以下の精度で見積もるために、3次元 Monte Carlo 放射伝達コード (MCstar) の開発を行い、また EarthCARE 衛星に搭載される 4 センサー (CPR, Lidar, MSI, BBR) を用いて 3次元の雲場を構築し、MCstar を用いて放射収支の算定を行うことを目的としている。

MCstar は Forward 型と Backward 型を開発しており、両者とも相関 k 分布法も導入しており (Sekiguchi and Nakajima 2008)、Forward 型は広帯域の放射フラックスを算定でき、Backward 型は広帯域の放射輝度を算定できる。

3次元の雲場の構築には 2つの方法を用いた。1) 最適雲情報プロファイリング法 (MIDPM) (Barker and Donovan et. al., 2011)、2) ビン法を用いた雲微物理モデルと結合した非静力学モデルによる数値シミュレーションの結果を用いたものである。

MIDPM では、Cloudsat/CPR と AQUA/MODIS のプロダクトによる観測パラメータのペアのライブラリを作成した。この観測パラメータのライブラリは CPR のレーダー反射因子 $\text{dBZe}(z)$ の鉛直分布と MODIS の多波長イメージャー MSI のスペクトル放射輝度、雲の光学的厚さ (COT)、粒子の有効半径 (RE)、雲頂温度 (T_c) である。CPR の軌道上にない MODIS のピクセルでの MODIS の雲パラメータをライブラリのもものと比較し、偏差が最小となる組を選択し、最も一致するレーダー反射因子の鉛直プロファイルを選び出した。ここでは、2007年7月2日のカリフォルニア沖での夏の層雲のデータを用いた。

2つめの雲構築法は、気象庁 NHM 非静力学モデルにビン法雲モデルを組み込んだモデルを用いたカリフォルニア沖での夏の層雲の数値シミュレーションによって行われた (Iguchi et al., 2008; Sato et al., 2009, 2011)。数値シミュレーションは、 $30\text{km} \times 30\text{km} \times 1.5\text{km}$ の周期境界条件の領域で、水平、鉛直グリッドが $100\text{m}, 20\text{m}$ と $300\text{m}, 20\text{m}$ の解像度で行われた。それぞれの分解能で 2つの異なるセルシステムは、異なる凝結核 (CCN) 濃度でシミュレーションされた。分解能 100m の場合、領域平均した雲の光学的厚さ $\langle \text{COT} \rangle$ と標準偏差は、雲核数のすくない Pristine Case では 3.0 と 4.3 であり、雲核数の多い Polluted Case では 8.5 と 7.4 である。

改良した MCstar (Forward 型) では光路長を消散と散乱の透過率で決める 2つのコードを開発し、両者を用いて 2つの手法で構築した離散雲場の放射収支を再度見積もった。それらと Plane Parallel Approximation (PPA) (Cahalan et al., 1994) と Independent Pixel Approximation (IPA) との比較を行った。全ての結果を反射率の差で考察を行った。3次元離散雲場での放射収支の見積もりと PPA との差は雲の離散的であるほど大きくなり、また分解能が細かいほどその差は大きくなった。 ΔR (3D-PPA) の最大値は 0.080 で、放射フラックスに換算すると 70Wm^{-2} であった。

一方で、IPA は平均の消散係数が 5 から 8km^{-1} であると、衛星のようなキロメートル単位の分解能の場合、IPA 近似には十分に厚い光学的厚さである。この場合、 ΔR (3D-IPA) は 0.010 以下で放射フラックスに換算すると 10Wm^{-2} であった。一方で、モデルシミュレーションの場合では IPA 近似では光学的に薄く、 ΔR (3D-IPA) は最大で 0.070 であった。このように、3次元雲の放射収支をより精度よく見積もるために、3次元雲システムの解明が重要である。

キーワード: 三次元放射伝達解法, 最適雲情報プロファイル, モンテカルロ
Keywords: 3D radiative transfer, MIDPM, Monte Carlo

Synergistic use of the geostationary and the polar orbit satellites for surveying the cloud evolution process: plan
Synergistic use of the geostationary and the polar orbit satellites for surveying the cloud evolution process: plan

中島 孝^{1*}; 永尾 隆¹; Letu Husi¹
NAKAJIMA, Takashi^{1*}; NAGAO, Takashi¹; LETU, Husi¹

¹ 東海大学
¹Tokai University

The use of spaceborne radar and imager aboard the CloudSat, Aqua, EarthCARE, GCOM-C1, and the 3rd generation geostationary satellites for investigating cloud evolution process, is suggested. These satellites have been in orbit or will be launched in the middle of 2010-era and contribute for observing aerosols, clouds on the earth system. Since aerosols and clouds exert an important influence on the planet's water and energy balances, more understanding of their lifecycle is required. Optical thickness and particle size of clouds are primal information for estimating the cloud evolution process. These parameters are retrieved from multi-spectral imageries obtained from space-borne satellite sensors. Recently, active sensors, such as the CloudSat cloud profiling radar (CPR) and the CALIPSO Lidar present a new epoch of aerosol and cloud observation with the purpose of revealing transition of particles, from cloud condensation nuclei to rain droplets via cloud and drizzle particles. They observe vertical cross section of the cloud system along the satellite footprint. As follow on the CloudSat / CALIPSO, the EarthCARE that has both active and passive sensors is planed by JAXA, NICT, and ESA collaboration. Doppler capability of the EarthCARE CPR will reveals vertical motion of cloud particles. Moreover, the 3rd generation geostationary weather satellite will appear in 2015 and observe aerosol and cloud system in every 10 or 2.5 minutes. Therefore, it is expected that the combined use of polar orbital passive/active sensors and geostationary satellites reveal details of cloud evolution process, statistically and dynamically. In this presentation, we introduce recent progresses of aerosol and cloud observations from satellites, showing the multi-sensor views of cloud growth process obtained from an active radar (CPR) and a passive imager (MODIS).

キーワード: 雲物理, 衛星観測, 大気放射
Keywords: Cloud evolution, Satellite, GCOM, EarthCARE

Retrieval algorithm for aerosols based on GCOM-C1/SGLI Retrieval algorithm for aerosols based on GCOM-C1/SGLI

佐野 到^{1*}; 向井 苑生¹; 中田 真木子¹; Holben Brent²; Dubovik Oleg³; Kokhanovsky Alexander⁴
SANO, Itaru^{1*}; MUKAI, Sonoyo¹; NAKATA, Makiko¹; HOLBEN, Brent²; DUBOVIK, Oleg³; KOKHANOVSKY, Alexander⁴

¹ 近畿大学, ²NASA/GSFC, ³Lille University, ⁴EUMETSAT

¹Kinki University, ²NASA/GSFC, ³Lille University, ⁴EUMETSAT

It is known that atmospheric aerosols have valuable information in many research fields. However estimation of aerosol direct and indirect effects on climate changes in the 5th report of IPCC still involves large uncertainty due to lack of precise aerosol properties.

JAXA (Japanese space agency) is developing the GCOM-C (Global change observing mission?climate) satellite series, which are expected to provide us new aerosol information as well as geo-physical parameters for thirteen years after launch. The first of GCOM-C series will carry the SGLI (second generation global imager) sensor which observes total radiance from near UV to thermal infrared wavelengths including polarization measurements at red and near IR. This work intends to develop an efficient algorithm for aerosol retrieval based on this polarization information to be given by GCOM-C1/SGLI.

キーワード: Aerosol, SGLI, GCOM-C

Keywords: Aerosol, SGLI, GCOM-C

GCOM-C1/SGLIのための海洋基礎生産力推定アルゴリズム Ocean primary production algorithm for the GCOM-C1/SGLI

平譚 享^{1*}; 夫津木 亮介¹; 新明 克仁¹; 高尾 信太郎²; 藤原 周³; 齊藤 誠一¹

HIRAWAKE, Toru^{1*}; FUTSUKI, Ryosuke¹; SHINMYO, Katuhito¹; TAKAO, Shintaro²; FUJIWARA, Amane³; SAITOH, Sei-ichi¹

¹ 北海道大学大学院水産科学研究院, ² 北海道大学大学院地球環境科学研究院, ³ 国立極地研究所

¹Faculty/Graduate School of Fisheries Sciences, Hokkaido University, ²Faculty of Environmental Earth Science, Hokkaido University, ³National Institute of Polar Research

One of the objectives of second-generation global imager (SGLI) on the earth observation satellite, Global Change Observation Mission 1st-Climate (GCOM-C1) is to understand the global carbon cycle. Therefore, estimation of column integrated daily net primary production (PP_{eu}) as carbon assimilation by photosynthesis of phytoplankton in the ocean is essential for the objective of SGLI/GCOM-C1 project. Most of the algorithms developed in the past used chlorophyll *a* (chl *a*) concentration. However, estimation of chl *a* concentration from satellite data has uncertainty due to the effect of pigment packaging that leads to underestimation, and the interference of colored dissolved organic matter (CDOM) which leads to overestimation. Another uncertainty is derivation of photosynthetic rate of phytoplankton. Although the vertically generalized productivity model (VGPM) which is one of the frequently used algorithms expressed the maximal photosynthetic rate (P^B_{opt}) as a function of sea surface temperature (SST), the SST derived P^B_{opt} had large error, particularly in the polar waters. Furthermore, discussion on the effect of global warming to primary productivity in the ocean using satellite data is facilitated, if the photosynthetic rate is an independent parameter on the SST.

To reduce these issues, light absorption coefficient of phytoplankton (a_{ph}) was used in the algorithm for SGLI/GCOM-C1; product of P^B_{opt} and chl *a* in the VGPM, which means productivity at the depth with the maximal photosynthetic rate within a water column, was expressed by photosynthetic available radiation (PAR) absorbed in phytoplankton. In situ primary production and optical data to develop the algorithm were measured in the North Pacific, Japan Sea, East China Sea, Southern Ocean, Chukchi Sea (Arctic Ocean), Bering Sea. Additional datasets of the Bermuda Atlantic Time-series Study (BATS), Hawaii Ocean Time-series (HOT) and The California Cooperative Oceanic Fisheries Investigations (CalCOFI) were also obtained for the development and validation of the algorithm. Accuracy in the estimation of product of P^B_{opt} and chl *a* (P_{opt}) and PP_{eu} were fairly well and estimated values from the new algorithms almost satisfied a factor of 2 of the values measured in situ. If accurate value of a_{ph} is derived from SGLI data, global estimation of PP_{eu} without the issues of pigments packaging, CDOM and SST are expected.

キーワード: 基礎生産, 植物プランクトン, 吸収係数, GCOM-C, SGLI

Keywords: primary production, phytoplankton, absorption coefficient, GCOM-C, SGLI

気候変動研究のための GCOM-C/SGLI による全球雪氷観測と検証計画 Global snow and ice cover observations using GCOM-C1/SGLI for studying climate changes

堀 雅裕^{1*}; 青木 輝夫²; Stamnes Knut³; 谷川 朋範¹; 朽木 勝幸²; Li Wei³; Chen Nan³
HORI, Masahiro^{1*}; AOKI, Teruo²; STAMNES, Knut³; TANIKAWA, Tomonori¹; KUCHIKI, Katsuyuki²; LI, Wei³; CHEN, Nan³

¹ 宇宙航空研究開発機構地球観測研究センター, ² 気象研究所, ³ スティーブンス工科大学

¹Japan Aerospace Exploration Agency, ²Meteorological Research Institute, ³Stevens Institute of Technology

The "Global Change Observation Mission-Climate" (GCOM-C) is a project of Japan Aerospace Exploration Agency (JAXA) for the global observation of the Earth environment. The GCOM-C is a part of the JAXA's GCOM mission which consists of two satellite series, GCOM-C and GCOM-W (Water). GCOM-C carries a multi-spectral optical radiometer named Second Generation Global Imager (SGLI), which will have special features of wide spectral coverage from 380 nm to 12 micrometer, a high spatial resolution of 250m, a field of view exceeding 1000km, two-direction simultaneous observation, and polarization observation. The GCOM-C mission aims to improve our knowledge on the global carbon cycle and radiation budget through high-accuracy observation of global vegetation, ocean color, temperature, cloud, aerosol, and snow and ice. As for the cryosphere observation, not only snow and ice cover extent but also snow physical parameters are retrieved from SGLI data such as snow grain sizes at shallow layers, temperature, and mass fraction of impurity mixed in snow layer and so on. These snow physical parameters are important factors that determine spectral albedo and radiation budget at the snow surface. Thus it is essential to monitor those parameters from space in order to better understand snow metamorphosis and melting process and also to study the response of snow and sea-ice cover extent in the Polar Regions to a climate forcing such as global warming. In addition, one of important objectives of the GCOM mission is to monitor long-term trend of the geophysical parameters for understanding the mechanism of earth's climate system. For this purpose, the data from GCOM series satellites are not enough. Thus, JAXA launched a website named "JAXA Satellite Monitoring for Environmental Studies (JASMES)" for semi-near real-time monitoring of earth's environmental variables. Through this website JASMES provides users with not only satellite datasets (flat binary) but also information on the current status of the climate variables such as solar radiation reaching the earth's surface (photosynthetically available radiation: PAR), snow and cloud cover, dryness of vegetation (water stress trend), wild fire and so on. MODIS data since February 2000 are currently processed for this analysis but SGLI data will be used after the launch of GCOM-C. Furthermore, the data from Advanced Very High Resolution Radiometer (AVHRR) onboard polar orbiting satellites operated by the National Oceanic and Atmospheric Administration (NOAA) since 1978 are also under preparation toward establishing a half-century long datasets of remote sensing after the success of the GCOM mission. This presentation will summarize the SGLI cryospheric products and validation plans, and also briefly introduce the JASMES dataset.

キーワード: 積雪, 積雪粒径, 積雪不純物, 雪氷面温度, リモートセンシング, 気候

Keywords: Snow Cover, Snow Grain Size, Snow Impurity, Surface Temperature, Remote Sensing, Climate

GCOM-C1 陸面反射率プロダクトの開発 Development of GCOM-C1 land surface reflectance product

村上 浩^{1*}
MURAKAMI, Hiroshi^{1*}

¹ 宇宙航空研究開発機構 地球観測研究センター
¹ JAXA, Earth Observation Research Center

陸面反射率 (RSRF) プロダクトは植生や被覆分類等の陸域の高次アルゴリズムの入力になると共に放射収支におけるアルベードや大気推定のバックグラウンドとなる情報でもあり、GCOM-C1/SGLI (2016年度打ち上げ予定) の要となるプロダクトである。RSRFの推定は、晴天域において衛星による大気上端輝度データから大気分子とエアロゾルの散乱・吸収を補正して地表面からの光を分離 (大気補正) することで行われる。しかし、大気上端輝度からエアロゾルの情報を抽出するためには背景となる陸面の情報を差し引く必要があり、結局両者を同時推定することが必要となってしまう。この推定においては、エアロゾルや RSRF の波長特性についての経験的な仮定や候補モデルを拘束条件としてしばしば用いられる。ただしこの場合、求めたい量を拘束条件にしてしまう恐れもあるので多様な波長特性の知見を蓄積して適切な選択を行う必要がある。RSRF を先見値とする場合、衛星観測は特定の方向からの観測になるため、RSRF の観測太陽・衛星幾何条件による変化 (BRDF) もモデル化する必要がある。

大気補正におけるエアロゾル候補モデル (粒径・高度分布、屈折率等) の設定は、エアロゾル推定を目的とするアルゴリズム (候補モデルを選択するような一般的なエアロゾル推定アルゴリズムの場合) における候補モデルとも整合性を持たせられる可能性がある。特にエアロゾル推定時のバックグラウンドとして RSRF を使うこともあり、アルゴリズム間の整合性が取れば誤差評価や精度向上などにおいてメリットがあると考えられる。

GCOM-C1 サイエンスチームには SKYNET や AERONET 等の地上観測を用いたエアロゾル特性やその地域性の知見の蓄積、植生等の陸面分光反射率やその方向性の観測やモデル化 (キャノピー放射伝達) を行っているグループがある。2012年の夏にミニワークショップを開催し、それらの知見を JAXA が集約しながら段階的に取り込んで陸面大気補正アルゴリズムを開発していくという方針を決めている。その際には RSRF や BRDF を利用する被覆や LAI やアルベードなどの下流のアルゴリズムとの整合性 (大気補正時の拘束条件を下流で利用することにならないようにすること) の考慮の必要性も確認された。

GCOM-C1 打ち上げ時に向けた開発としては、既存の知見を基にアルゴリズムを開発する予定である。RSRF 推定の対象とする SGLI の波長はあまり強い吸収はないものの、その弱い吸収について水蒸気、オゾン、酸素、NO₂ 等の吸収補正を行う。また、標高については、海面気圧と高分解能の高度データ (ASTER GDEM-2 と GTOPO1 を併用) を用いて標高補正を行う。地表面の勾配の影響については地表面の法線を高度データから推定しておき太陽入射角から近似的に斜面補正を行う予定である。GCOM-C1/SGLI の特長として 380nm の近紫外波長バンドを持っている。RSRF の事前推定には、一般に反射率が小さく BRDF の変化も小さい近紫外や青波長域で陸面反射率を拘束し、その波長の大气散乱光を抽出することで大気補正することを計画している。しかし近紫外～青波長の RSRF の推定のためには地表面の状態 (植生や被覆) の推定が必要であり、そのためにエアロゾルの影響を受けにくい長波長域 (NIR や SWIR) のデータや、(RSRF の時間変動は大気より小さいと仮定して) 近い過去の推定値を用いることを計画している。

GCOM-C1 打ち上げ後の将来のアルゴリズムとしては、LAI 開発におけるキャノピー放射伝達研究の知見を入れて土地被覆や植生の季節フェーズを考慮した拘束条件を用いるように改善したり、新たなエアロゾル推定手法やエアロゾル輸送モデルの予測値を用いることなどが期待される。GCOM-C1/SGLI には斜め方向から赤と NIR 波長で観測を行う偏光センサを搭載している。陸面 BRDF や地表面偏光等の知見が蓄積されれば、将来的にはこれも用いて大気補正の精度を改善できる可能性がある。

キーワード: GCOM-C1, SGLI, 陸面反射率, 大気補正
Keywords: GCOM-C1, SGLI, land surface reflectance, atmospheric correction

Assessing the variations of the Alaskan tundra vegetation using MODIS NDVI 250-m imagery

SETIAWAN, Yudi^{1*}; KUSHIDA, Keiji¹
SETIAWAN, Yudi^{1*}; KUSHIDA, Keiji¹

¹College of Bioresource Sci., Nihon Univ. Japan

¹College of Bioresource Sci., Nihon Univ. Japan

Improving the understanding of Alaskan tundra vegetation using remote sensing data is a challenging task due to a general lack of consistency and coverage from historical and existing platforms. Furthermore, it should be essential for many aspects of global environmental change research.

Vegetation dynamics of the land surface is an integrated reflection of the vegetation and physical and chemical factors that shape the environment of a given land area and determinants for overall biological diversity patterns. In this paper, we demonstrate an approach for displaying detailed information of the Alaskan tundra ecosystem from the vegetation dynamics point of view. We assumed that locations displaying similar temporal vegetation patterns are inferred to have a similar vegetation and/or environment characteristics. Differences among land cover types as reflected in temporal profiles of NDVI are caused by differences in vegetation type composition and/or in their densities, and their responses to local environmental conditions, consequently, the use of long time-series NDVI will capture such different patterns in seasonal growth cycles.

The clustering method yields sets of clusters, which each cluster represents a significant different NDVI pattern at detailed information in the land cover type. However, the complexity and enormous amount of time-series NDVI datasets may lead to the difficulty of obtaining the actual number of clusters in this study. Therefore, to provide maximum effectiveness of the clustering algorithm, we first consider the number of clusters 15 which correspond to the number of dominant physiognomy of Alaska tundra ecosystem (Raynold et al., 2005). The number of clusters was then evaluated based on a statistical measurement of how separate that pattern is to patterns in its own cluster compared to patterns in other clusters. This separability analysis was applied to discriminate among high detailed significant patterns that were theoretically defined to portray the specific characteristics of each land cover type.

キーワード: Vegetation dynamics, Tundra vegetation, Alaska, MODIS
Keywords: Vegetation dynamics, Tundra vegetation, Alaska, MODIS

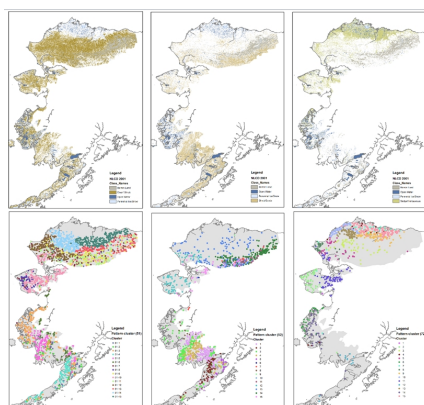


Figure 1. Three-dominant land cover classes of NLCD 2001 in Alaskan tundra: a) dwarf shrub, b) shrub/scrub, and c) sedge/herbaceous. Distribution of the 15-clusters for: d) dwarf shrub, e) shrub/scrub and f) sedge/herbaceous

ALOS-AVNIR2・PALSARを用いた湿潤年における東シベリア北方林内の永久凍土融解・湛水被害域の抽出 Detection of regional extent of permafrost thawing and waterlog damage area in boreal forest in eastern Siberia during w

飯島 慈裕^{1*}; 阿部 このみ²; 伊勢 紀²; 増澤 直²
IJIMA, Yoshihiro^{1*}; ABE, Konomi²; ISE, Hajime²; MASUZAWA, Tadashi²

¹ 独立行政法人海洋研究開発機構, ² 株式会社 地域環境計画
¹JAMSTEC, ²Regional Environmental Planning Inc.

永久凍土が広く分布する東シベリアでは、2000年代後半に、冬季積雪と夏季降雨が共に大きく増加した気候が過剰に湿潤化した状態が複数年継続した。活動層（地表面直下の凍結融解土壌層）の土壌水分量が大幅に増加したことで、土壌の熱的性質が変化した。その結果、永久凍土表層の融解が進み、活動層が深くなると共に、この土壌の過剰な湿潤化によって、谷や平坦地、アラス（凍土融解による陥没地形）周辺といった水が集まりやすい地形では、長期的に湛水状態が継続する事態となった。さらに、湛水した地表面上では、北方林（カラマツ (*Larix cajanderi*) を優占種とする）の生育環境が悪化し、森林の枯死・荒廃が数年の時間差をもって進行した。

これら一連の現象の連鎖は、気候湿潤化の広がりによって東シベリアに広域的に生じていると考えられる。すなわち、過湿な地表面と森林が枯死・荒廃した地域を特定することによって、気候湿潤化による永久凍土荒廃現象の空間的広がりが示されることになる。この際、従来の森林リモートセンシングで使われる可視・近赤外の情報に加えて、水分状態を検出できるマイクロ波衛星の情報を組み合わせることで、水環境変化を伴う北方林内の永久凍土環境変化の検出が有効であると考えた。以上から、本研究では、ALOS-AVNIR2・PALSARを用いた衛星データ解析と現地調査結果に基づき、ヤクーツク近郊での湿潤化による水域の拡大状況と、それによる永久凍土・活動層変化を伴う北方林変化域の抽出を試みた。

本研究では、レナ川中流域で活動層内土壌水分の過剰な湿潤化が進行した2006~2009年の夏季のALOS-PALSARおよびAVNIR2画像を利用した。研究対象地域は、地上検証データが得られるレナ川左岸のスパスカヤパッド地域と、右岸のユケチ地域である。各対象地域として、現地観測点を含む10x10kmの領域を設定した。PALSAR画像データは、ジオコーディングとノイズ軽減の平滑化処理を行った後、PALSARのマイクロ波後方散乱係数から、2007年時点の値と2009年と2007年との差分を組み合わせた閾値として段階的な区分をすることで、通常の森林と、過湿で林床面まで湛水した森林の違いの抽出を試みた。また、同期間のAVNIR2画像から、土地被覆状態として、草原と北方林、ならびに枯死・荒廃が進行した北方林の教師付分類を行い、同様に複数年度の分類図から、北方林が変化した領域を抽出した。

レナ川左岸スパスカヤパッド地域は、地下水が少ない砂質ロームからなる河岸段丘上に北方林が広がっており、永久凍土融解に伴う陥没地形であるアラス湖沼は少ない。この地域のPALSAR分類図では、段丘を刻む谷筋や平坦面に沿って北方林内の湛水域が拡大し、それに対応してAVNIR2分類図からは筋状に森林の変化域が抽出された。これは、左岸では谷や地形的に平坦になった地域の土壌水分飽和度が高く、カラマツが選択的に枯死していた現地観測結果とよく一致する。

一方、レナ川右岸ユケチ地域は、凍土氷を多く含む平地が広がり、アラス湖沼の密度が非常に高い。そこでは、同期間にアラス湖沼の面積が拡大し、湖沼の周囲を囲むように、森林内の湛水域が広がる様子が抽出された。右岸では閉鎖水域のアラス湖沼に多くの融雪水と降水が流入し、水域面積が拡大すると共に湖水があふれる縁辺部では活動層が湛水状態となってカラマツが倒伏、枯死しており、この解析結果もこれらの現地の観察状況とよく一致する。

以上から、ALOS-AVNIR2とPALSARデータの複合に基づく森林内湛水域と森林変化域を抽出し複合させる手法によって、湿潤化が永久凍土、森林荒廃をもたらす一連の現象を広域的に捉えることができ、地形や凍土状態の異なる地域で特徴的な荒廃状況を時系列的に示す可能性が確認された。凍土の性質が異なる左岸・右岸ともに湛水領域と森林枯死域が短期間の気候湿潤化で大きく広がっており、森林変化による熱・水・炭素循環における影響は無視できないと考えられる。今後は更なる現地検証と、広域への適用を進める方針である。

キーワード: ALOS, 永久凍土, 気候湿潤化, 北方林, 荒廃, 東シベリア

Keywords: ALOS, permafrost, wet climate, boreal forest, degradation, eastern Siberia

静止気象衛星を用いた降雨域推定マップの作成と GSMaP A potential map of precipitation area using the geostationary meteorological satellite for the GSMaP

広瀬 民志^{1*}; 樋口 篤志¹; 牛尾 知雄²; 妻鹿 友昭²; 山本 宗尚³; 重 尚一³; 里村 雄彦³; 濱田 篤⁴
HIROSE, Hitoshi^{1*}; HIGUCHI, Atsushi¹; USHIO, Tomoo²; MEGA, Tomoaki²; YAMAMOTO, Munehisa³; SHIGE, Shoichi³
; SATOMURA, Takehiko³; HAMADA, Atsushi⁴

¹ 千葉大学環境リモートセンシング研究センター, ² 大阪大学大学院 工学研究科 電気電子情報工学専攻, ³ 京都大学大学院 理学研究科 地球惑星科学専攻, ⁴ 東京大学大気海洋研究所

¹Center for Environmental Remote Sensing, Chiba University., ²Division of Electric and Information Engineering, Osaka University., ³Division of Earth and Planetary Science, Graduate School of Science, Kyoto University., ⁴Atmosphere and Ocean Research Institute, Tokyo University.

GSMaP は広域・高時間分解能の降水観測データの需要に応えるために複数台の衛星に搭載されたマイクロ波放射計の輝度温度観測から全球の降水量を推定している。さらにマイクロ波放射計搭載衛星の観測がない場所や時間帯では、静止気象衛星の赤外線観測から雲の移動ベクトルを計算し、前後の時間のマイクロ波観測で得た降雨域の移動先を推定することで1時間毎という高時間分解能の降水観測を可能にしている (GSMaP_MVK, GSMaP_NRT; v5.222.1)。しかしこの手法では短時間に発生する対流性降水を見逃す危険性が指摘されており (Ushio et al. 2009)、また雲の移動ベクトルの推定には静止気象衛星の赤外 1 チャンネル (IR1) のみしか用いられていない。そこで本研究では静止気象衛星のマルチチャンネルを用いてより精度の高い降雨域推定マップ (降雨域ポテンシャルマップ) を作成し、ポテンシャルマップを用いて GSMaP_MVK・NRT の降雨域を修正することでどの程度精度の向上が見込めるのかを検証した。

静止気象衛星から降雨域を推定する指標は MTSAT-1R が観測する 10.5~11.5 μm の IR1 と 6.5~7 μm の水蒸気チャンネル (WV) の差分を用いた。これは IR1 と WV の輝度温度差が小さい場所は降雨を伴う深い対流雲の存在する確率が高いという Ohsawa et al.(2001) の結果に基づいており、また IR1 と WV はほとんどの静止気象衛星に搭載されているため広範囲・長期観測が容易である。降雨域の真値として熱帯降雨観測衛星 (TRMM) 降雨レーダー (PR; 2A25, V7) の地上降水強度と気象庁全国合成レーダーの換算降水強度を用い、MTSAT-1R との同時観測から輝度温度を降雨確率に変換することでポテンシャルマップを作成した。

最初に GSMaP の降雨域とレーダー観測から得られた降雨域を比較した結果、海上のマイクロ波放射計搭載衛星が使えない場所で GSMaP_MVK が降雨域を過大評価しているという結果が得られた。そこで GSMaP の降水量とポテンシャルマップの降雨確率が一定の閾値以下の場所を晴れと判定し直した結果、海上の GSMaP_MVK の降雨域推定精度が向上するという結果が得られた。パラメタスウィープの結果最も精度がよいのは GSMaP の降水量が 1.0mm/hr 以下かつポテンシャルマップの降雨確率が 15 % 以下を閾値に設定した時で、降雨域推定のスレットスコア (TS) が 0.37 から 0.41 まで向上しマイクロ波放射計搭載衛星が利用可能な場合の TS の値である 0.45 に近づいた。また一方でマイクロ波搭載衛星が使えない陸域・海岸域において GSMaP_NRT が降雨域を過小評価しているという結果が得られたため、作成したポテンシャルマップの降雨確率が 40 % 以上の場所を降雨域と判定し直して GSMaP の降雨域に加えた結果、陸域・海岸域の GSMaP_NRT の TS が 0.27 から 0.34 まで向上するという結果が得られた。

これらの結果から、マイクロ波放射計搭載衛星が使えない場所では静止気象衛星マルチチャンネルを用いた降雨域ポテンシャルマップを利用することで GSMaP の降雨域推定精度の向上が期待される。

キーワード: マイクロ波放射計, 衛星全球降水マップ, 静止気象衛星, 降水レーダー, 高時間分解能, 中高緯度
Keywords: microwave radiometer, GSMaP, GMS, precipitation radar, high time resolution, mid-high latitude

多地点・多変数解析手法を用いたエアロゾル特性の推定のための衛星リモートセンシング手法の研究

A study of multi-pixel and multi-parameter satellite remote sensing for aerosol properties

橋本 真喜子^{1*}; 森本 祥太郎¹; 竹中 栄晶¹; 中島 映至¹

HASHIMOTO, Makiko^{1*}; MORIMOTO, Shotaro¹; TAKENAKA, Hideaki¹; NAKAJIMA, Teruyuki¹

¹ 東京大学大学院大気海洋研究所

¹ AORI, the University of Tokyo

We have developed a new satellite remote sensing algorithm to retrieve the aerosol optical characteristics using multi-pixel information of satellite imagers. In this algorithm, the inversion method is a combination of the MAP method (Maximum a posteriori method, Rodgers, 2000) and the Phillips-Twomey method (Phillips, 1962; Twomey, 1963) as a smoothing constraint for the state vector. Retrieved parameters in our algorithm are aerosol optical properties, such as aerosol optical thickness (AOT) of fine mode, sea salt, and dust particles, a volume soot fraction in fine mode particles, and ground surface albedo of each observed wavelength. We simultaneously retrieve all the parameters that characterize pixels in each of horizontal sub-domains consisting the target area. Then we successively apply the retrieval method to all the sub-domains in the target area.

We conducted numerical tests for the retrieval of aerosol properties and ground surface albedo for GOSAT/CAI imager data to test the algorithm for the land area. The result of the experiment showed that AOTs of fine mode and dust particles, soot fraction and ground surface albedo are successfully retrieved within absolute. We discuss the accuracy of the algorithm for various land surface types. Our future work is to extend the algorithm for analysis of AGEOS-II/GLI and GCOM/C-SGLI data.

Keywords: GCOM/C-SGLI, Aerosol, Satellite remote-sensing

水色衛星観測による海洋植物プランクトンのグループ別一次生産速度の推定 Estimation of Phytoplankton Group-Specific Primary Production in Kuroshio Waters Using Ocean Colour Remote Sensing

平田 貴文^{1*}; 杉江 恒二¹; 鈴木 光次¹; 齋藤 宏明²
HIRATA, Takafumi^{1*}; SUGIE, Koji¹; SUZUKI, Koji¹; SAITOH, Hiroaki²

¹北海道大学 大学院地球環境科学研究所, ²水産総合研究センター 東北海区水産研究所

¹Faculty of Environmental Earth Science, Hokkaido University, ²Tohoku National Fisheries Research Institute, Fisheries Research Agency

The ocean is a major sink of carbon dioxide released into the atmosphere. Phytoplankton conducting primary production plays a significant role on temporal and spatial variability in the absorption of the carbon. Also phytoplankton transfers carbon to higher trophic levels in a marine ecosystem, and the carbon pathways to the higher trophic levels affect vulnerability of food web, or the ecosystem, against external forcings. Tremendous efforts to measure primary productivity of the total phytoplankton community in the global oceans have been made historically. On the other hand, measurements of primary productivity of individual phytoplankton groups composing of the total community are relatively sparse. This is partly due to methodological difficulties to differentiate such productivity of individual groups in situ, on top of practical circumstance that in situ observation requiring ship time is usually expensive. Therefore, it is of great interest if satellite remote sensing can overcome these problems, given that a number of earth observation satellites have been and will be launched. Especially, it is a great advantage of satellite observation that one can hindcast primary productivity of individual phytoplankton groups using historical remote sensing data, once a remote sensing methodology/algorithm is developed. In this presentation, we show a primitive result of development of such methodology to estimate primary productivity of diatoms and haptophytes in Kuroshio waters using ocean colour remote sensing.

キーワード: 水色, 衛星観測, 植物プランクトン, 一次生産

Keywords: Ocean Colour, Satellite Observation, Phytoplankton, Primary Production

NICTのGPM/DPR地上校正および検証実験について NICT Calibration and Validation experiment for DPR/GPM

中川勝広^{1*}; 花土弘¹; 川村誠治¹; 岩井宏徳¹; 高橋暢宏¹; 井口俊夫¹
NAKAGAWA, Katsuhiko^{1*}; HANADO, Hiroshi¹; KAWAMURA, Seiji¹; IWAI, Hironori¹; TAKAHASHI, Nobuhiro¹; IGUCHI, Toshio¹

¹ 独立行政法人情報通信研究機構

¹ National Institute of Information and Communications Technology

GPMの主衛星の打ち上げは、2014年2月28日に予定されている。主衛星には、JAXA（宇宙航空研究開発機構）とNICT（情報通信研究機構）が開発した13.6GHz帯（KuPR）と35.5GHz帯（KaPR）の二周波降水レーダが搭載されている。NICTは、NICT小金井において主に、2台のレーダのビーム一致度の評価を目的にした校正実験を予定している。またNICT神戸（未来ICT研究所）とNICT沖縄（沖縄電磁波技術センター）の2箇所地上検証実験を計画している。現在開発中のX帯フェイズドアレーレーダ（PANDA：PANDA: Phased Array radar Network DATA system）は、短時間での体積観測が可能で二周波降水レーダの観測体積を一致させたレーダ反射因子の厳密な比較・評価を実施する。NICT沖縄のC帯偏波降水レーダ（COBRA）の偏波情報を用いたレベル2アルゴリズムで用いられている雨滴粒径分布パラメータや融解層行動の検証などを行う。さらに、地上設置の2次元ビデオディストロメータ（2DVD）、衝撃型ディストロメータ（Joss-type Disdrometer）、レーザ雨滴計（Parsivel）を用いたk-Z関係の評価についても引き続き実施する。

キーワード: GPM, DPR (二周波降水レーダ), ビーム一致度, 地上検証, PANDA (Phased Array radar Network DATA system), COBRA

Keywords: GPM, DPR, Beam matching, Ground Validation, PANDA (Phased Array radar Network DATA system), COBRA

地上観測によるGPM/DPR検証 Ground-based Validation of GPM/DPR

金子有紀^{1*}; 沖理子¹; 中川勝広²; 中村健治³

KANEKO, Yuki^{1*}; OKI, Riko¹; NAKAGAWA, Katsuhiko²; NAKAMURA, Kenji³

¹ 独立行政法人宇宙航空研究開発機構, ² 独立行政法人 情報通信研究機構, ³ 獨協大学経済学部

¹Japan Aerospace Exploration Agency (JAXA), ²National Institute of Information and Communications Technology, ³Faculty of Economics, Dokkyo University

The Global Precipitation Measurement (GPM) mission is an expanded follow-on mission to TRMM (Tropical Rainfall Measuring Mission) and GPM core satellite carries dual frequency precipitation radar (DPR) and GPM Microwave Imager on board. The DPR is expected to advance precipitation science by expanding the coverage of observations to higher latitudes than those of the TRMM/PR, measuring snow and light rain by the KaPR, and providing drop size distribution information based on the differential attenuation of echoes at two frequencies. After launch of GPM core satellite JAXA will perform evaluation of DPR L2 products, for example, precipitation rate, measured radar reflectivity, and drop size distribution. Those physical values will be compared with ground-based observations. This poster presentation will show the preliminary report of DPR evaluation comparison between DPR products and ground-based instruments during the first 2 months after launch, including a ground-based Ka-band radar system.

Keywords: GPM, DPR, validation

EarthCARE/MSIのための地表面反射率推定方法とエアロゾルモデル Optimal choice of surface reflectance and aerosol types for Multi-Spectral Imager on board EarthCARE

福田 悟^{1*}; 中島 映至²; 竹中 栄晶²
FUKUDA, Satoru^{1*}; NAKAJIMA, Teruyuki²; TAKENAKA, Hideaki²

¹ 宇宙航空研究開発機構, ² 東京大学大気海洋研究所

¹Japan Aerospace Exploration Agency, ²Atmosphere and Ocean Research Institute, The University of Tokyo

EarthCARE is a satellite which will be launched in 2016. EarthCARE is a joint mission between Europe and Japan. Four instruments such as CPR, ATLID, MSI and BBR will be equipped. MSI is a multi-spectral imager, and the purpose of it is to get the horizontal structure of aerosol and cloud. We are developing the aerosol retrieval algorithm for MSI. MSI aerosol products are consists of optical thickness over land, optical thickness over ocean, and Angstrom Exponent over ocean. Over ocean we implement two channel method with 0.68 μm and 0.86 μm (Higurashi and Nakajima, 1999) and we retrieve optical thickness and Angstrom Exponent. Over land we estimate the surface reflectance at 0.68 μm from longer wavelength. Kaufman et al (1997) used 2.2 μm to estimate the surface reflectance at 0.68 μm . In this study we tried to use 1.6 μm to estimate the surface reflectance at 0.68 μm . This is because there is a possibility to get better estimation than to use 2.2 μm and we can use this method for sensors which don't equip 2.2 μm such as GOSAT/TANSO-CAI or CAI2. We have made a scatter plot of the reflectance between 0.68 μm and 1.6 μm . As reflectance data set, we used AERONET data of 0.68 μm and GOSAT/TANSO-CAI's reflectance data of 1.6 μm . We found that there are some correlations between these two reflectances when we classified by NDVI. The correlation is larger when the NDVI is large. The error induced by this parameterization is calculated. The standard error is 0.009 when $0.5 < \text{NDVI} < 0.7$, and the standard error is 0.007 when $0.7 < \text{NDVI}$. We also calculated the error as aerosol optical thickness. The error as aerosol optical thickness at 0.5 μm is 0.18 when $0.5 < \text{NDVI} < 0.7$, and that is 0.14 when $0.7 < \text{NDVI}$. We will also develop aerosol models for each area by use of cluster method and linear classifier method.

キーワード: エアロゾル, リモートセンシング

Keywords: aerosol, remote sensing, EarthCARE

南極海とオホーツク海におけるヘリ搭載型マイクロ波放射計による観測 Helicopter-borne observation with portable microwave radiometer in the Southern Ocean and the Sea of Okhotsk

田村 岳史^{1*}; 大島 慶一郎²; リーサー ヤン³; 豊田 威信²; 舘山 一孝⁴; 野村 大樹²; 中田 和輝²; フレーザー アレックス²; ヤンセン ペーター³; ニューバリー キム³; マッサム ロバート³; 牛尾 収輝¹
TAMURA, Takeshi^{1*}; OHSHIMA, Keiichiro²; LIESER, Jan³; TOYOTA, Takenobu²; TATEYAMA, Kazutaka⁴; NOMURA, Daiki²; NAKATA, Kazuki²; FRASER, Alex²; JANSEN, Peter³; NEWBERY, Kym³; MASSOM, Robert³; USHIO, Shuki¹

¹ 国立極地研究所, ² 低温科学研究所, ³ 南極気候生態学共同研究センター, ⁴ 北見工業大学

¹National Institute of Polar Research, ²Institute of Low Temperature Science, ³ACE CRC, ⁴Kitami Institute of Technology

It has been recently recognized that sea ice production in the polar regions is controlled by the thin sea ice area with thickness of less than 0.2 m. Spatial distribution of thin ice area and its variability are important information to better understand the reduction of the sea ice covered region in a changing climate environment. We have developed a thin ice thickness algorithm for satellite passive microwave data of the Advanced Microwave Scanning Radiometer-EOS (AMSR-E) and Special Sensor Microwave Imager (SSM/I). Although the microwave skin depth of bare sea ice is about several cm at most, microwave brightness temperatures correlate with the surface salinity (brine volume fraction), which is sensitive to thin ice thickness. Here, we present in-situ observations using a helicopter-borne portable passive microwave radiometer that has the same specifications as the satellite AMSR-E and AMSR-II sensors (36 GHz-vertical and -horizontal channels), to validate and improve our thin ice thickness algorithm. This study estimates the relationship between the microwave brightness temperatures (both satellite and helicopter-borne portable sensors) and in-situ observations of sea ice thickness.

We present data from two airborne missions, one in early austral spring 2012 during the Sea Ice Physics and Ecosystem eXperiment (SIPEX-2) of the Australian Antarctic Program in East Antarctica, and one from the Sea of Okhotsk in mid-winter 2009. These microwave data are compared with the satellite AMSR-E and AMSR-II data and ice thickness estimated from Moderate-Resolution Imaging Spectroradiometer (MODIS) data, helicopter-borne IR sensor data, and ship-borne downward looking camera data. High-resolution airborne microwave brightness temperatures show good agreement with low AMSR-E and AMSR-II brightness temperatures, despite the significant resolution mismatch. In the thin ice region, the polarization ratio of 36 GHz vertical and horizontal temperatures (PR-36) is found to be well correlated with ice thickness, supporting the validity of the AMSR-E thin ice algorithm which was developed previously by our group. We also discuss the microwave characteristics of fast versus pack ice, with a view to improving a satellite fast ice detection algorithm.

キーワード: マイクロ波, ヘリ搭載型マイクロ波センサー, 薄氷域, 現場検証, 南極海, オホーツク海

Keywords: passive microwave, heli-borne portable radiometer, thin ice region, in-situ validation, Southern Ocean, Sea of Okhotsk