

Rock slides, rock avalanches and deep seated gravitational slope deformation at the orogeny scale: the case of European

Rock slides, rock avalanches and deep seated gravitational slope deformation at the orogeny scale: the case of European

GIOVANNI, Crosta^{1*}
GIOVANNI, Crosta^{1*}

¹Dept. Earth and Environmental Sciences, UNiv. Milano Bicocca

¹Dept. Earth and Environmental Sciences, UNiv. Milano Bicocca

An orogen scale inventory of large landslides (mainly rockslides), rock avalanches and deep seated gravitational slope deformations (DSGSD) in the European Alps has been prepared by the authors (Crosta et al., 2013, 2014) and results of the analysis are presented in this contribution. The inventory includes: over 2000 large landslides, ranging in area between 0.1 and 17 km², about 300 rock avalanches, ranging between 0.09 and 15.5 km², and a total of 1033 DSGSDs, ranging in size between 0.03 and 108 km². The inventory covers an area of about 110,000 km² extending over the alpine territories of Italy, France, Switzerland, Austria and Slovenia, and was prepared by using available satellite imagery (multitemporal, Google Earth, Google, Inc.) and topographic data at different resolutions (DEMs from 1 m x 1m up to 20 m x 20 m for different areas). The inventory was validated against local and regional landslide inventories already available at different scales. Geometrical features and geomorphological parameters have been collected and related to the different phenomena and local settings in order to assess the control of local slope morphology on the occurrence and the geometry of these large instabilities. The frequency/area relationship for the different classes of mapped features is presented. The inventory shows that large landslides are widespread in the Alps with clustering in some sectors of the orogen. Their spatial distribution has been analysed through bivariate and multivariate analysis (mainly Principal Component Analysis and Discriminant Analysis) against a variety of factors, including: lithology, proximity to tectonic structures, seismicity, uplift and exhumation rates, position within the mountain belt and along main and tributary valleys, slope morphometry (e.g. relief, elevation, gradient), ice thickness of glaciers during LGM, and mean annual rainfall. The analysis allowed a preliminary assessment of conditions favourable to the onset and development of large landslides and DSGSD. The occurrence of foliated metamorphic rocks, LGM ice thickness, local relief (and related parameters), slope size, drainage density and river stream power are the local parameters most positively correlated to DSGSD occurrence. Finally, a comparison between the distributions of different phenomena is presented and discussed.

キーワード: landslides, deep seated gravitational slope deformation, rock avalanche, inventory, orogen, European Alps
Keywords: landslides, deep seated gravitational slope deformation, rock avalanche, inventory, orogen, European Alps

Shallow Landslide Susceptibility Mapping Using High-resolution Topography for Areas Devastated by Super Typhoon Haiyan Shallow Landslide Susceptibility Mapping Using High-resolution Topography for Areas Devastated by Super Typhoon Haiyan

RABONZA, Maricar^{1*} ; FELIX, Raquel¹ ; LAGMAY, Alfredo mahar francisco² ; ECO, Rodrigo narod² ;
ORTIZ, Iris jill¹ ; AQUINO, Dakila²
RABONZA, Maricar^{1*} ; FELIX, Raquel¹ ; LAGMAY, Alfredo mahar francisco² ; ECO, Rodrigo narod² ;
ORTIZ, Iris jill¹ ; AQUINO, Dakila²

¹University of the Philippines Diliman, ²Nationwide Operational Assessment of Hazards

¹University of the Philippines Diliman, ²Nationwide Operational Assessment of Hazards

Super Typhoon Haiyan, considered as one of the most powerful storms recorded in 2013, devastated the central Philippines region on 8 November 2013 with damage amounting to more than USD 2 billion. Hardest hit are the provinces of Leyte and Samar. Rehabilitation of the areas that were devastated requires detailed hazard maps as a basis for well-planned reconstruction. Along with severe wind, storm surge, and flood hazard maps, detailed landslide susceptibility maps for the cities and municipalities of Leyte (7,246.7 sq. km) and Samar (13,121 sq. km) provinces are necessary. In order to rapidly assess and delineate areas susceptible to rainfall-induced shallow landslides, Stability INdex MAPping (SINMAP) software was used over a 5-meter Interferometric Synthetic Aperture Radar (IFSAR)-derived digital terrain model (DTM) grid. Topographic, soil-strength and hydrologic parameters were used for each pixel of a given DTM grid to compute for the corresponding factor of safety. The landslide maps generated using SINMAP are highly consistent with the landslide inventory derived from high-resolution satellite imagery from 2003 to 2013. The methodology addresses the need for rapidly generated shallow landslide susceptibility maps and detailed landslide susceptibility classification which is useful to identify safe and unsafe areas for reconstruction and rehabilitation efforts. These shallow landslide susceptibility maps have been made freely available to different relief and rehabilitation agencies in Typhoon Haiyan ravaged areas. These maps complement the debris flow and structurally-controlled landslide hazard maps that are also being prepared for rebuilding Haiyan's devastated areas.

キーワード: Landslide, Natural Hazard, SINMAP, Susceptibility Map, Spatial Analyses, Philippines
Keywords: Landslide, Natural Hazard, SINMAP, Susceptibility Map, Spatial Analyses, Philippines

伊豆大島における表層崩壊の発生機構 Triggering mechanism of shallow landslides in Izu-Oshima Island, Japan.

今泉 文寿^{1*}; 宮本 邦明²; 石川 友貴奈³
IMAIZUMI, Fumitoshi^{1*}; MIYAMOTO, Kuniaki²; ISHIKAWA, Yukina³

¹ 静岡大学農学研究科, ² 筑波大学生命環境系, ³ 静岡大学

¹Graduate School of Agriculture, Shizuoka University, ²Faculty of Life and Environmental Sciences, University of Tsukuba,

³Faculty of Agriculture, Shizuoka University

On October 16, 2013, Typhoon Wipha attached west slope of the Mt. Mihara in Izu-Oshima Island, Japan, and induced shallow landslides with large areas. These landslides killed 36 people, and 3 people are still missing. Sliding surfaces of these landslides were located at the boundary between high permeable scoria (and tephra) layer and low permeable loess layer. Aerial photograph investigation in the period from 1945 to 2013 showed that only one rainfall event, Typhoon Ida in 1958, induced many landslides in the area before the Typhoon Wipha. Depth of the sliding surfaces during this Typhoon was similar to that during Typhoon Wipha. We derived spatial distribution of the pore water pressure in the two-dimensional slopes with multi-layer structures on the basis of the continuity equation and equation of motion for seepage flow. Our analyses elucidated that the pore water pressure does not agree with hydrostatic pressure if the lower end of the saturated zone is not locating on the impermeable layer. Our simulation of the seepage flow during the Typhoon Wipha and Typhoon Ida showed that the pore water pressure was highest at the boundary between tephra and loess layers on which sliding surfaces of the landslides were located. Pore water pressure during other large rainfall events without landslide was below that during Typhoon Wipha and Ida. Consequently, increasing in the pore water pressure at the boundary between tephra and loess is the important factor triggering landslides in the Izu-Oshima Island.

Keywords: landslide, pore water pressure, Izu-Oshima, multi-layer soil structure

豪雨時に火山灰斜面における土砂流動化現象：2013年伊豆大島土砂災害を例として Flowsliding in volcanic ash slope during heavy rainfall: A Case Study of 2013 Izu Oshima Landslides

王 功輝^{1*} ; 江 耀²

WANG, Gonghui^{1*} ; JIANG, Yao²

¹ 京都大学防災研究所, ² 京都大学大学院理学研究科

¹Disaster Prevention Research Institute, Kyoto University, ²Graduate School of Science, Kyoto University

On Oct. 16, 2013, catastrophic shallow landslides were triggered on a wide area of the west-side hill slopes in Izu-Oshima Island, Japan, by the heavy rainfall accompanying Typhoon No.26 (Wipha). The displaced landslide material traveled long distance with rapid movement, resulting in 35 dead, 4 missing, and 46 buildings being completely destroyed on the downstream area of Motomachi area. To understand the initiation and movement mechanisms of these shallow landslides, we took sample from the source areas and examined their shear behavior under partially drained or undrained condition. We performed flume tests to trigger landslides by rainfall, and examined the variation of soil moisture, pore-water pressure and landslide movement. Test results showed that high pore-water pressure could be built up and maintained within the displaced landslide material, resulting in rapid flowsliding movement, irrespective of the nature of very shallow sliding mass. Results obtained from the simulation of landsliding shows that the high mobility resulted from liquefaction failure of displaced landslide materials. Field observation also revealed that wind load to the trees on steep slopes might have played key role on the triggering of the slope failure on wide areas.

キーワード: 土砂流動化, 豪雨, 火山灰斜面, 風载荷, 樹木

Keywords: Flowslide, heavy rainfall, volcanic ash slope, wind load, trees

An Improved Method for Classifying Debris Flow Disaster Potential An Improved Method for Classifying Debris Flow Disaster Potential

Wu Tingyeh^{1*}
WU, Tingyeh^{1*}

¹NATIONAL SCIENCE AND TECHNOLOGY FOR DISASTER REDUCTION, TAIWAN
¹NATIONAL SCIENCE AND TECHNOLOGY FOR DISASTER REDUCTION, TAIWAN

This study aims to clarifying torrents with debris flow disaster potential. A special debris flow occurred at Hualien County during typhoon Saola in 2012. A turning curve occurred and community which was not supposed to be under disaster potential damaged by debris flow. The previous study shows the main reasons of this event are continuous rainfall event, specific geological material and topographic conditions. The disaster represents the insufficiency of the current method to classify the debris flow potential. Therefore, this study follows the findings and intends to confirm if the similar torrents exist or not. The study cases were selected from the torrents with debris flow potential defined by the authority and 5 torrents were determined by their geological condition with metamorphic rock material. The debris flow simulations were carried out by Flo-2D numerical model with three continuous designed rainfall events. The simulation results show that turning curve occurred at some of the cases, but some did not. Authors analyzed their topographic conditions to check the differences of the simulation result. From the gradient of the flowing part and the topographic conditions of alluvial fan, the criteria of the debris flow resulting in turning curve could therefore be summarized, which could be the indexes to clarify the probable torrents with debris flow potential.

Keywords: Flo-2D, debris flow disaster potential, turning curve, topographic criteria, second debris flow disaster

Karangkobar landslide, Banjarnegara district central of Java Province Indonesia Karangkobar landslide, Banjarnegara district central of Java Province Indonesia

DASA TRIANA, Yunara¹ ; KRISTIANTO, Kristianto^{1*} ; NURSALIM, Asep¹
DASA TRIANA, Yunara¹ ; KRISTIANTO, Kristianto^{1*} ; NURSALIM, Asep¹

¹Geological Agency, Ministry of Energy and Mineral Resources of Indonesia

¹Geological Agency, Ministry of Energy and Mineral Resources of Indonesia

In Indonesia has been 436 landslides during 2014 period. 115 of them occurred in the Central of Java Province. One of the landslide that evolve in to debris flow and cause great casualties and damages, have occured on December 12nd, 2014 in Jemblung, Sampang Village, Karangkobar, Banjarnegara Regency. Geographically it is located at 109°43'15.3912" E and 7°16'52.5828" S. This landslide causing more than 100 people died and property losses. Regionally disaster location composed by Jembangan volcanic rocks consisting of andesitic lava and volcanic rocks clastic.

The types of landslides is rotational sliding and the types of materials are debris. This landslide triggered by heavy rainfall. Climatological Agency of Banjarnegara data showed that rainfall accumulation reached 349 mm in eleven days before landslide, while at the time of the incident was recorded 101.8 mm.

This even is interesting because of the material dispersion mechanism happens to be a large of the distribution. Distance of debris flow up to large area and has caused damage along its flow track. Distribution of debris controlled by the viscosity of the material and topography.

キーワード: Jemblung, debris, rainfall, Banjarnegara, topography

Keywords: Jemblung, debris, rainfall, Banjarnegara, topography

2011年赤谷の深層崩壊の動的摩擦係数推定 Estimation of dynamic friction of the Akatani landslide based on the waveform inversion and numerical simulation

山田 真澄^{1*}; 松四 雄騎¹; Mangeney Anne²
YAMADA, Masumi^{1*}; MATSUSHI, Yuki¹; MANGENEY, Anne²


¹ 京都大学防災研究所, ² パリ地球物理研究所
¹DPRI Kyoto University, ²IPGP

We performed numerical simulations of the 2011 deep-seated Akatani landslide in central Japan to understand the dynamic friction process of the landslide. By comparing the forces obtained from the numerical simulation and seismic waveform inversion, the most probable friction model was estimated.

Based on the numerical simulation, dynamic coefficient of friction was well constrained as 0.3 and a rapid increase of the velocity and the associated drop of the coefficient of friction were observed right after the onset of sliding.

The friction law that controls landslide dynamics is velocity-weakening with sudden drop after the initiation of sliding, which accelerates the deep-seated landslide. The friction model calibrated here using seismic data helps to understand the dynamics of the landslide and provide the basic property of the shearing resistance of the slip plane.

Keywords: deep-seated landslide, dynamic friction, seismic waveform, numerical simulation, granular material

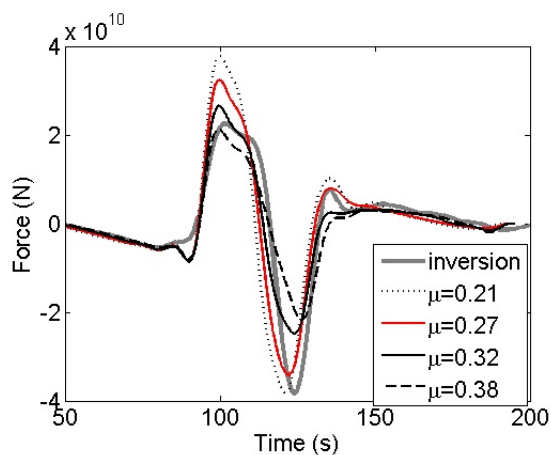

受け盤大規模岩盤地すべり地における地震観測 Seismic observation in a large, incipient rockslide on an anacinal slope

土井 一生^{1*}; 王 功輝¹; 釜井 俊孝¹; 千木良 雅弘¹
DOI, Issei^{1*}; WANG, Gonghui¹; KAMAI, Toshitaka¹; CHIGIRA, Masahiro¹

¹ 京都大学防災研究所

¹ Disaster Prevention Research Institute, Kyoto University

Japan has experienced mega earthquakes and catastrophic coseismic landslides (e.g. the 2004 Niigata Chuetsu earthquake and the 2011 off the Pacific coast of Tohoku Earthquake). However, it is not well understood how the slopes behave under strong shaking because seismic observations on the slope are crucially insufficient.

In 2014, we started seismic observations in Kawashimo landslide, a large, incipient rockslide on an anacinal (infacing) slope in Ehime Prefecture, southwest Japan. The length, the relative height and the width of the Kawashimo landslide are approximately 700 m, 450 m and 150 m, respectively. On the lower side of the landslide, rocks are highly fractured so that long cracks are densely observed. We installed two seismometers there, with the separation distance of 30 m. Ten earthquakes with high signal to noise (S/N) ratios were recorded from Oct. 30, 2014 to Jan. 7, 2015. We first calculated the spectra using the waveforms of ten seconds after the twice of S times because scattering waves are considered to be coming from all the directions in this time window. Then, we took the spectral ratios of two horizontal components to the vertical one for the purpose of cancellation of source spectra. The obtained spectral ratios are stable among ten earthquakes we analyzed, regardless of their back-azimuths. Horizontal components have a spectral peak around 7 Hz at both stations but the peak values of the spectral ratios are larger in NS components than in EW at one station, indicating that dip direction of the slope and/or shape of the landslide block may affect the characteristics of slope vibration. These results will provide basic information for considering the motion of the landslide materials on a slope during earthquakes.

Acoustic emissions preceding the stress drops in locally sheared granular materials Acoustic emissions preceding the stress drops in locally sheared granular materials

Jiang Yao^{1*}; 王 功輝²; 釜井 俊孝²
JIANG, Yao^{1*}; WANG, Gonghui²; KAMAI, Toshitaka²

¹ 京都大学大学院理学研究科, ² 京都大学防災研究所

¹Graduate School of Science, Kyoto University, ²Disaster Prevention Research Institute, Kyoto University

For better understanding the mechanisms of rapid landsliding events, both the initial and long runout motion in which granular masses flow with extremely low friction is essential. Many studies had been performed to understand such kind of the unusual physical feature. However, the progressive maturation of these catastrophic landslides is still lack of enough scientific evidence. Importantly, acoustic emission (AE) technique provides the opportunity to study the grain-scale shear deformation of granular assemblies, and can be used to directly investigate the physical processes and failure mechanisms. Herewith, we employed a high frequency range of AE sensor to capture the elastic waves due to the abrupt perturbations of internal forces and release of strain energy, and the dependence of particle size and shear velocity on the AE characteristics has also been examined. We found that the dynamical drops of shear resistance and the amplitude of AE waveforms were larger with increase of the particle size. We also analyzed the relationship between AE rates (per second) and shear velocity, which indicated that the AE rates would increase with increase of the shear velocity. Ultimately, we examined the frequency contents and occurrence time of AE waveforms, and we found that the ultrasonic precursors occurred prior to the dynamic failures among granular materials.

キーワード: acoustic emission, stress drop, granular materials, particle size, shear velocity, rapid landslides

Keywords: acoustic emission, stress drop, granular materials, particle size, shear velocity, rapid landslides

1949年今市地震によって発生した降下火砕物の崩壊 Debris avalanches of pyroclastic fall deposits induced by the 1949 Imaichi earthquake

千木良 雅弘^{1*}; 鈴木 毅彦²; 王 功輝¹; 飛田 哲男¹
CHIGIRA, Masahiro^{1*}; SUZUKI, Takehiko²; WANG, Gonghui¹; TOBITA, Tetsuo¹

¹ 京都大学防災研究所, ² 首都大学東京

¹Disaster Prevention Research Institute, Kyoto University, ²Tokyo Metropolitan University

Debris avalanches of pyroclastic fall deposits have been frequently induced by earthquakes in circum pacific countries, causing severe damage. Recent earthquakes that induced that type of landslides are 2011 Tohoku earthquake, 1984 Naganoken Seibu earthquake, 1978 Izu-Oshima-Kinkai earthquake, 1969 Tokachi-Oki earthquake, and 1949 Imaichi earthquake, in which landslides induced by the 1949 Imaichi have much less record than the others. Landslides induced by the 1949 Imaichi earthquake with a magnitude of 6.4 has been reported to have induced numerous numbers of landslides by Morimoto (1951) but their distribution has not been well plotted on a map and the slid materials are not well specified. We surveyed the affected area using high-resolution DEMs obtained by the airborne LiDAR and made field surveys. Comparison between the high-resolution DEMs and local landslide distribution maps showed that there are two types of landslide, one is a deep landslide with a sliding surface along the Kanuma Pumice Fall Deposot in a depth of 5-6 m and the other is a shallow landslide with a sliding surface probably along the base of the Imaichi Pumice Fall Deposit in a depth of 2-3 m. The deep landslides are rather easy to identify using high-resolution DEMs, and in addition to the 1949 landslides, we identified older deep landslides, which are assumed to have sliding surfaces in the same horizon with the 1949 landslides. Topographic features of shallow landslides may be erased fast, so we suppose older landslides cannot be identified on high-resolution DEM images.

キーワード: 地震, 斜面崩壊, テフラ, 軽石

Keywords: earthquake, landslide, tephra, pumice

台湾南西部の鮮新—更新統泥岩地域のバッドランド斜面表層部での急速風化と塩水移動過程

Rapid Weathering and Salt Water Migration Processes near a Slope Surface in Plio-Pleistocene Mudstone Areas in Taiwan

樋口 衡平^{1*}; 千木良 雅弘²; 李 徳河³; 呉 健宏³

HIGUCHI, Kohei^{1*}; CHIGIRA, Masahiro²; LEE, Der-her³; WU, Jian-hong³

¹ 東京大学大学院新領域創成科学研究科, ² 京都大学防災研究所, ³ 国立成功大学土木工程学系

¹Grad. Sch. of Front. Sci., Univ. Tokyo, ²DPRI, Kyoto Univ., ³Dept. of CE, Natl. Cheng Kung Univ.

Badlands consisting of barren slope surfaces, sharp ridges, and v-shaped gullies are widely formed in Plio-Pleistocene mudstone in southwest Taiwan due to rapid weathering and erosion near the slope surface. The mudstone, which formed in the syn-collisional Plio-Pleistocene foreland sequence, has high density with a void ratio as low as 0.2 and has pore water chemistry similar to the seawater. In this area under the humid, subtropical climate with distinct dry and rainy seasons, since the mudstone slope surfaces are eroded as high as 9 cm/y in average in the rainy season, paved roads such as national express way are frequently damaged by slope failure hazards. To understand the mechanism of rapid erosion, we monitored water content and salinity near the slope surface and found that salt water migrates from the depth to the surface during the dry season, and salt precipitated on crack surfaces. After the dry season, rainfalls in the early rainy season dilutes the salinity, and closes desiccation cracks, consequently slowing the downward migration of water near the slope surface. The wetting of dry rocks and dilution of pore water near the slope surfaces deteriorates the rock and disperses rock-forming grains. The deteriorated surfaces are eroded during subsequent rain in the late rainy season. After the erosion, migration of salt water from the depths to the surfaces occurs again during the subsequent dry season.

キーワード: 鮮新—更新統泥岩, 急速風化, バッドランド, 観測, 水分塩分移動

Keywords: Plio-Pleistocene Mudstone, Rapid Weathering, Badlands, Monitoring, Salt Water Migration

2014年11月22日に発生した長野県神城断層地震による斜面崩壊—初報 Landslides induced by the Nov. 22, 2014 Nagano Prefecture Kamishiro Fault Earthquake, Japan - a primary report

ハス バートル^{1*}; 松田 昌之¹; 高山 陶子¹; 船越 和也¹

HAS, Baator^{1*}; MATSUDA, Masayuki¹; TAKAYAMA, Toko¹; FUNAKOSHI, Kazuya¹

¹ アジア航測株式会社

¹ Asia Air Survey, Co., Ltd.

To outline the characteristics of landslides induced by the strong earthquake (M6.7) occurred in northern Nagano Prefecture on Nov. 22, 2014 (Hereafter Nagano Prefecture Kamishiro fault earthquake), we interpreted landslide using aerial photos that taken just after the earthquake and partly conducted field survey. The earthquake was considered to be occurred on the Kamishiro fault, that dipping to east and is the northern part of the Itoigawa-Shizuoka tectonic line (The headquarters for Earthquake Research Promotion, 2014). The vertical and oblique photos taken by Asia Air Survey Co., Ltd on Nov. 24, 2014 were used for interpretation.

In the study area, about 58km², a total of 104 landslides have been detected. Most of the landslides could be classified to shallow landslides. The most of the landslides occurred on terrace scarps, or around knick line of slopes. Meanwhile, many landslides occurred on slopes where previously occupied by old landslides.

In the study area, most of the landslides occurred within the distance of several km from the Kamishiro fault, in and around the Hakuba village and Otari village. However, landslides also have been confirmed in Nagano city where about 27 km distance from the source fault. In the study area, more than 70% of the landslides were located on the hanging wall of the source fault. This characteristic is coinciding with the features of landslides induced by reverse-fault earthquakes occurred in eastern Japan (e.g. Has et al., 2011). However, compare to the similar magnitude earthquakes, such as the Chuetsu earthquake in 2004 (Has et al., 2011) and Northern Nagano earthquake in 2011 (Has et al., 2012) occurred nearby the focal area of the Kamishiro fault earthquake, the number of landslides are much fewer and their dimension is much smaller. Future works are necessary for clarify these features how to related to the characteristics of strong motion, antecedent rainfall, topographical and geological conditions.

In this study, the interpretation of landslides was conducted in a very limited area, and also the field surveys were insufficient due to snow covering several days after the earthquake. For grapes the overall features of the landslides induced by the earthquake, detailed survey will be needed after snow melting.

キーワード: 地震, 斜面崩壊, 活断層, 長野県

Keywords: Earthquake, Landslide, Active fault, Nagano Prefecture

A Study on the characteristics of the seismic signals produced by the man-made rockfall and debris flow
A Study on the characteristics of the seismic signals produced by the man-made rockfall and debris flow

FENG, Zheng-yi^{1*} ; LIN, Sheng-hao¹ ; XIE, Chang-hong¹
FENG, Zheng-yi^{1*} ; LIN, Sheng-hao¹ ; XIE, Chang-hong¹

¹National Chung Hsiung University

¹National Chung Hsiung University

In this study we performed a set of field tests on a 5-meter model slope to investigate the characteristics of seismic signals induced by signal rockfall (single rock rolling) and man-made dry 'debris flow' down a slope. We used a backhaul to release the 3 single rocks in 3 different sizes, and measure/compare the seismic signals they generated during rolling. Furthermore, we used a truck to dump a load of about 3 metric tons of coarse debris with the 3 rocks that used for signal rock rolling test and measure/compare the seismic signals generated by the dry 'debris flow'. The Hilbert-Huang Transform (HHT) was adopted to perform the mode decomposition and to analyze the time-frequency spectra for the seismic signals that we obtained in time domain. We expect that the seismic signals generated by the 3 large rocks in the 3 different sizes will produce distinguishable time-frequency characteristics in the seismic signals; that is, we can recognize that what frequency contents in the time-frequency spectra were produced by which size of the 3 test rocks. The results of this study may help us on interpretation of the seismic signals that we collect from seismic stations and broadband station for landslides.

キーワード: landslide, rockfall, debris flow, seismic signal, time-frequency analysis, HHT

Keywords: landslide, rockfall, debris flow, seismic signal, time-frequency analysis, HHT

付加体中の低角スラスト沿いに発生した豪雨による深層崩壊について Rain-induced rock avalanches with sliding surfaces along low-angle-thrusts in accretionary prisms

荒井 紀之^{1*}; 千木良 雅弘¹
ARAI, Noriyuki^{1*}; MASAHIRO, Chigira¹

¹ 京都大学防災研究所

¹ Disaster Prevention Research Institute, Kyoto University

近年、世界各地で地球温暖化に関係すると考えられる異常気象が発生している。台風の巨大化により、これまでの観測記録を塗り替える豪雨が多発するようになった。それとともに、2006年にフィリピンレイテ島で発生した山体崩壊、台湾では2009年に台風モラコットの豪雨による小林村の斜面災害など、豪雨に伴う大規模な深層崩壊が多発している。しかしながら、それらの発生場所予測手法は未だに確立されておらず、また、その地質構造的な原因も必ずしも明らかになっていない。

日本の西南日本外帯には、広く白亜紀から新第三紀の付加体堆積物が分布している。これらの地域では、豪雨に伴う深層崩壊が多発している。紀伊半島では、2011年に台風12号の豪雨により50箇所以上の深層崩壊が発生した。そこで、著者らは、 $2 \times 10^6 \text{m}^3$ と $8 \times 10^6 \text{m}^3$ の崩壊が発生した紀伊半島中央部の赤谷地域を中心として地質調査を行い、深層崩壊と地質特性との関係を調査してきた。

その結果、二つの崩壊は、大規模な低角断層沿いに発生したものであることがわかった。この低角断層は、北西から北北西の $29^\circ \sim 40^\circ$ 傾斜をなし、水平方向に少なくとも5km以上にわたり連続している。この断層を川原樋衝上断層と名付けることにする。この断層の最大幅は1.5mで、粘土質断層角礫中にガウジが主剪断面沿いに数条含まれている。この低角衝上断層は、厚い粘土質の破碎帯を伴い、その傾斜角が $30^\circ \sim 40^\circ$ であることから、付加体中の連続性のよい弱面を容易に構成しやすい。さらに、水理地質学的に不透水層として機能し、豪雨時に地下水流を遮水し、高間隙水圧を発生させる原因になっている可能性も高い。この低角断層は長期間の河川侵食作用により河岸に露出したもので、スラストの上盤をなす流れ盤斜面が不安定化して重力変形を起こし、豪雨を誘引として最終的な深層崩壊に至ったことが示唆される。また、低角衝上断層に加えて、赤谷の崩壊では、崩壊部の両サイドが高角断層により切断されていたことを発見した。このような高角断層は、赤谷東の崩壊でも存在している可能性がある。

深層崩壊の発生しやすい場所を抽出し、そのランク付けを行うことは、災害を軽減する上で非常に重要である。重力変形斜面を抽出することに加え、大規模な低角断層とそれを切断する高角断層を調査することにより、より精度の高い発生場所の予測が可能となると期待される。上記の知見は、紀伊山地のみならず、西南日本外帯の付加体に共通する可能性が高い。

キーワード: 深層崩壊, 付加体, スラスト

Keywords: rock avalanche, accretionary prism, thrust

Fluvial incision history that controlled the distribution of landslides in the Central Range of Taiwan

Fluvial incision history that controlled the distribution of landslides in the Central Range of Taiwan

鄒青穎^{1*}; 千木良雅弘¹; 松四雄騎¹; 陳樹群²
TSOU, Ching-ying^{1*}; CHIGIRA, Masahiro¹; MATSUSHI, Yuki¹; CHEN, Su-chin²

¹Disaster Prevention Research Institute, Kyoto University, Japan, ²Department of Soil and Water Conservation, National Chung Hsing University, Taiwan

¹Disaster Prevention Research Institute, Kyoto University, Japan, ²Department of Soil and Water Conservation, National Chung Hsing University, Taichung, Taiwan

Hillslope processes, which are affected by long-term river incision, give rise to the risk of landsliding in active orogens. We studied the river incision history and the subsequent response of rock slopes in the upstream Dahan River catchment, north Taiwan, by analyzing river long profiles, hillslopes, and landslide scars. The results were combined with chronological data from several landform surfaces to reconstruct the history of landscape evolution. At the study area, the landscape comprises three levels of knickpoints and corresponding slope breaks. These knickpoints propagated upstream along trunk and tributary rivers, undercutting and destabilizing nearby slopes, of which the oldest is a paleosurface dated to ca. 150 kyr by cosmogenic nuclide dating. Consequently, three levels of V-shaped inner gorges (up to 600 m deep) are incised into the paleosurface. The inner slopes of the three levels of gorges have mean inclinations of 35.6 degrees, 37.7 degrees, and 39.8 degrees, and steepen from the higher to the lower inner gorges. These three series of knickpoints and corresponding slope breaks suggest the occurrence of three phases of river incision. Based on analyses of the steepness indices of the river long profiles, cosmogenic nuclide dating, and the regional tectonic and climatic history, the two earlier phases of incision are inferred to have been caused by prevailing tectonic uplifts during the middle to late Pleistocene, and the most recent phase by climate change in addition to uplift. The long-term history of river incision has controlled the distribution of deep-seated gravitational slope deformation and landslides. Many areas of deep-seated gravitational slope deformation and deep-seated rockslide-avalanches are aligned along the higher and middle slope breaks, and debris slide avalanches are concentrated along the middle and lower slope breaks.

Reference:

Tsou, C.-Y., Chigira, M., Matsushi, Y., Chen, S.-C., 2014. Fluvial incision history that controlled the distribution of landslides in the Central Range of Taiwan. *Geomorphology* 226, 175-192.

キーワード: landscape evolution, landslide, river incision, knickpoint, convex slope break, cosmogenic nuclides
Keywords: landscape evolution, landslide, river incision, knickpoint, convex slope break, cosmogenic nuclides

鉛直振動下における斜面崩壊の小型実験 Small-scale laboratory experiments of slope collapse under vertical shaking

船屋 佳佑^{1*}; 隅田 育郎¹
FUNAYA, Keisuke^{1*}; SUMITA, Ikuro¹

¹ 金沢大学大学院 自然科学研究科

¹ Graduate School of Natural Science and Technology, Kanazawa University

土砂から成る斜面は地震によって土砂崩れが誘発される。地震動の代表的なパラメータとして加速度、周波数、継続時間があり、これらのパラメータに崩壊現象が依存するはずである。振動による斜面崩壊の実験は土木工学の分野で多く行われてきた。近年では粉粒体物理学の観点からも、振動実験が行われている (Rubin et al. 2006, Katz and Aharonov, 2006)。しかしパラメータを数値変えて、それらに対する依存性を詳しく調べたモデル実験は少ない。本研究では粒子斜面のモデルを用いて加速度と周波数をそれぞれ2、3桁変えた振動実験を行い、崩壊の臨界加速度、崩壊の速度、崩壊様式のパラメータ依存性を調べ、粉粒体物理学の観点から斜面崩壊現象を理解することを目的とする。

実験はホッパーを取り付けたアクリル容器に、ガラスビーズを封入した実験セルと、振動台を用いて行う。ホッパー内部に溜められたビーズは隙間から勢い付かず流れ落ち、再現性の良い斜面を容器内壁に形成することができる。加速度センサーをアンプを介してオシロスコープにつなぐ。振動調節機の周波数、加速度を設定して60秒間の鉛直振動を加える。実験パラメータとして、周波数は10Hz、100Hz、1000Hz、5000Hzの4通り、また振動加速度の重力加速度に対する比である無次元数 $\Gamma = a/g$ (a :振動加速度 (m/s^2), $g=9.8(m/s^2)$) を0.08~5の範囲で変えて行う。崩壊の様子はカメラによって動画を撮影し、画像解析を行う。

斜面の初期形成角度は $\theta = 23.4^\circ \pm 0.5^\circ$ (平均値±標準偏差) であった。ガラスビーズの安息角が約 24° であるため、およそ安息角に近い値である。実験を行ったところ、加速度依存性と周波数依存性の両方を認めることができた。加速度を変えることによる斜面の振る舞いは周波数によって異なり、「静止」、「崩壊」、「対流」、「跳躍」の4つのレジームに分けることが出来る。100Hzでは崩壊が急激で短時間で停止する。一方、1000Hzでは崩壊が少しずつ進行し、長時間持続する。観察される崩壊様式と0~5(sec)における傾斜変化 ($d\theta/dt$) の値を用いてレジームダイアグラムを作成した。ここで振動開始から60秒後における傾斜変化が 0.02° 以上の場合を「崩壊」と定義した。 $(d\theta/dt)$ は0~5(sec)の間は臨界加速度が約100Hzで極小値となるが、時間の経過に伴い、極小となる周波数が約1000Hzへシフトする。レジームダイアグラムにおける臨界加速度の極小値を説明するために、振動1周期あたりのエネルギーである Shaking Strength(S) と、振動が粒子に与える力の変化である Jerk(J) という2つの無次元数を導入する (Yasuda & Sumita, 2014)。 $S = (A^2(2\pi f)^2) / gd$ 、 $J = (A(2\pi f)^3) / (g / (2d/g)(1/2))$ であり、ここでAは最大振幅(m)、fは周波数(Hz)、dは粒径(m)である。崩壊開始の臨界加速度 Γ が100Hzで極小となることは、顕著な崩壊が起きるためには $\Gamma > 0.3$ 、 $S > 3.0 \times 10^{-5}$ と $J > 0.3$ の3つの条件が必要であると考えたと説明ができる。次に「跳躍」レジームを考える。粒子が振動台から上方方向に跳躍した時の振動台に対する最大変位 z' を計算すると高 Γ 、低 f で大きくなることが分かる。「跳躍」レジームは $z' > 10d$ によって説明できる。

以上の結果から、粉粒体斜面の崩壊様式と崩壊速度は加速度ばかりでなく、周波数・継続時間に強く依存することが分かった。地震の周波数は0.1~10Hz程度の幅を持つ。実験と同様に卓越周波数によって多様な崩壊が起き、また崩壊が起きるための臨界加速度が最小になる周波数帯が存在する可能性がある。多様性の一つとして見つかった「跳躍」レジームは地震動の非対称な上下動の原因として提案された「トランポリン効果」(Aoi et al. 2008) と対応している可能性がある。また本実験は周波数が異なれば、より低加速度であっても最終的な崩壊による傾斜変化が大きくなる可能性があることを示唆している。地震による斜面崩壊の危険性を評価する際には可能な地震の周波数範囲すべてを考慮することが大切である。

文献

- Aoi et al. (2008). Science, 322, 727-730.
- Katz and Aharonov(2006). Earth Planet. Sci. Lett. 247 280-294
- Rubin et al(2006). Phys. Rev. E 74, 051307
- Yasuda and Sumita(2014). Prog. Earth Planet. Sci. 1:13.

キーワード: 斜面崩壊, 地震, 振動実験, 粉粒体, 加速度, 周波数

Keywords: slope collapse, earthquakes, shaking experiments, granular matter, acceleration, frequency

XMP Radar application to optimize volcanic debris flow measurement in Merapi volcano XMP Radar application to optimize volcanic debris flow measurement in Merapi volcano

SYARIFUDDIN, Magfira^{1*} ; OISHI, Satoru¹ ; IIDA, Masahiro¹ ; MURANISHI, Masahide¹ ; OGAWA, Mariko¹ ; IGUCHI, Masato²
SYARIFUDDIN, Magfira^{1*} ; OISHI, Satoru¹ ; IIDA, Masahiro¹ ; MURANISHI, Masahide¹ ; OGAWA, Mariko¹ ; IGUCHI, Masato²

¹Kobe University, ²DPRI, Kyoto University

¹Kobe University, ²DPRI, Kyoto University

Merapi is one of the world's most active volcano that is well known for its disastrous volcanic debris flow (*lahars*). Previously it has been understood that lahars at Merapi were triggered by rainfall with minimum intensity about 40 mm in 2 hour. However after its 2010 centennial eruption that deposited 10 times volume of pyroclastic materials of 1994 and 2006 eruptions, lahars at Merapi experiences different behavior as it is easily triggered by lower rainfall intensity at 14 mm in 1 hour and were also reported occurred in some areas that had never experienced lahars flow within 40 years. Since it is triggered by lower rainfall intensity now, it has been observed that lahars in Merapi occurred not only during rainy season but also in dry season.

Rainfall intensity in Merapi volcano plays important role not only on triggering and migrating sediment but also determining the level of damages. When rainfall intensity exceeds its threshold, the onset of generated lahars would happen within few hours. For Merapi volcano, it was suggested that rainfall intensity should be monitored for at least every 30 minutes duration. Variation of Merapi topography should also be considered when observing rainfall characteristic, since rainfall is also influenced by this small scaled climate factor. Hence using single raingauge is not recommended due to difficulties of installation, distribution and maintenance. Using raingauge would give limited spatial and temporal resolution.

A Radar system offers a way of measuring areal precipitation with both high spatial and temporal resolution and therefore currently offer the best solution to measure rainfall spatial variability in catchment area. The spatial resolution offered by ground based radar systems can range from ten of meter up to a kilometer, whereas the temporal resolution can range from seconds to an hour. This is an important factors for lahars measurement because in Merapi lahars generated at higher elevations and become more hazardous at 450-600 m elevation in each of the 13 rivers which drain the volcano.

X band dual polarimetric (XMP) radar has been installed at 110.4 E; -7.6 S or 14.3 km from Merapi's summit, Yogyakarta Regency, Indonesia. It has 6 s temporal resolution whereas spatial resolution ranging at 50-250 m mesh. This XMP radar has 9 GHz frequency and 3.33 cm wavelength which gives far greater resolution than what can be achieved by raingauge network or typical operational C Band radar. Two rivers, Kali Boyong and Kali Gendol that mainly experience lahars every year were chosen to be observed. Both are still in range of 30 km radius of radar detection and flow in dense populated area.

Research objective is to estimate lahars in Kali Gendol and Kali Boyong using improved hyperKANAKO model. HyperKANAKO model is graphical user interface system that is able to predict 2 dimensional debris flow with considering sabo dams planning to reduce loss due to lahars occurrence. This system requires upstream hydrograph, landform information and sabo dam conditions to simulate flow depth, river bed variation, flow discharge and sediment discharge.

Landform information would be gained using geographic information system whereas sabo dam information would be collected based on secondary data. There are 56 and 22 sabo dams respectively at kali Boyong and kali Gendol. Mathematical model between rainfall intensity from XMP radar and discharge data would be used to modify upstream hydrograph. Thus hyperKANAKO model in this research would directly use rainfall information derived from XMP-radar. Output of hyperKANAKO model is expected to not only give information about lahars deposits but also on better management of sabo dam construction

キーワード: Merapi, Lahars, Hyperkanako model, XMP radar

Keywords: Merapi, Lahars, Hyperkanako model, XMP radar

能登半島における測地学的手法を用いた地すべり変動の検出 Detection of Landslide displacement by Geodetic techniques at the Noto Peninsula

鬼頭 雄也^{1*}; 平松 良浩¹; 勝間 秀樹²
KITOH, Yuya^{1*}; HIRAMATSU, Yoshihiro¹; KATSUMA, Hideki²

¹ 金沢大学, ² 中部地下開発株式会社

¹Kanazawa University, ²Chubu Chika Kaihatsu Co., Ltd.

Natural disasters represented by earthquake, flood, and tsunami have occurred frequently in Japan. Landslides caused by earthquakes and/or heavy rains have caused great damages in many areas in Japan. Sliding of landslide moves slowly and continuously in general. Elucidation of the characteristic of spatio-temporal movement of landslide is important to understand the mechanism of landslide and to evaluate the assessment of its risk.

In this study, we estimated landslide displacements by geodetic techniques and analyzed the characteristic of landslide movement with ground surface observations at Wajima City, Ishikawa Prefecture, in the Noto Peninsula. We conducted GPS observations of the landslide during July 2014 to March 2015, and detected ground surface displacements from a change in the positions of the GPS sites. We also conducted SAR (synthetic aperture radar) analyses of InSAR (SAR interferometry) and PS-InSAR (persistent scatterer SAR interferometry) using 10 ALOS/PALSAR images acquired from December 2006 to October 2010. Furthermore, we used the ground data observation records of the borehole extensometers obtained by the Ishikawa Prefecture from 2008 to the present. We examined a landslide history of the analyzed area by tracking a topographic map published in 1970 and 5 m DEM released by GSI (Geospatial Information Authority of Japan) recently.

The InSAR analysis reveals landslide displacements of several tens cm/year in the area of 500 m x 500 m and horizontal displacements of 0.6-1.0 cm/year are estimated from GPS. The magnitudes and directions of the landslide displacements are coincident with the monitoring result of the borehole measurements and previous researches. We estimate the average rate of the landslide displacements of 0.5-0.8 m/year from the tracking topographical characteristics using the topographic data. These observations confirm that the landslides in the analyzed area have been active in recent years and suggest that active landslides in the past forms distinct scarp terrains and causes the past disasters written in historical materials.

Acknowledgements: PALSAR data are shared among PIXEL (PALSAR Interferometry Consortium to Study our Evolving Land surface), and provided from JAXA (Japan Aerospace Exploration Agency) under a cooperative research contract with ERI (Earthquake Research Institute, the University of Tokyo). The ownership of PALSAR data belongs to METI (Ministry of Economy, Trade and Industry) and JAXA. We would like to thank for the use SIGMA-SAR software for InSAR analysis [M.Shimada, 1999], StaMPS software for PS-InSAR analysis [Hooper et al., 2004, 2007], DEM (Digital Elevation Model) by GSI using SAR analysis, and GMT (Generic Mapping Tools) [Wessel,P. and W.H.F.Smith, 1998] and QGIS software to draw the result.

キーワード: 地すべり変動, 測地学的手法, GPS, InSAR, 能登半島

Keywords: Landslide displacement, geodetic techniques, GPS, InSAR, Noto Peninsula

ALOS データから発見されたサイクロンアイラにより引き起こされたブータンの大規模地すべり
Observation of a gigantic Bhutan landslide caused by Cyclone Aila in 2009 using ALOS data

佐藤 剛^{1*}; 小池 徹²; 田殿 武雄³
SATO, Go^{1*}; KOIKE, Toru²; TADONO, Takeo³

¹ 帝京平成大学, ² 地球システム科学 (株), ³ 宇宙航空研究開発機構
¹Teikyo Heisei University, ²Earth System Science Co., Ltd, ³JAXA

The kingdom of Bhutan is located in the Himalayan Range in a mountainous area of weak geology. Landslide disasters occur every year, mainly induced by heavy rain. In 2009, the Mangde-chu River, one of the primary rivers in the country was blocked at 1,063 masl of its river bed by huge volumes of debris discharged from a tributary. Moreover, a National Highway connecting Bhutan with India was covered by the debris and closed to traffic. In spite of the significance of the event, no research was conducted on the debris transport process of the tributary.

Therefore, we conducted observations of the topographic condition of the tributary basin using satellite images produced by the Advanced Land Observing Satellite (ALOS, Daichi) of the Japan Aerospace Exploration Agency. Interpretation of the topography was done using a counter Digital Surface Model of ALOS PRISM data (5 m resolution). The ALOS data were observed just after Cyclone Aila. As a result, we detected the topography of a gigantic landslide with fresh scarps, at an upstream site of the tributary. The body of the landslide was 1.2 km wide and 1.1 km long; moreover, the landslide occurred in the vicinity of an older landslide.

We think that this landslide was induced by Cyclone Aila and became the source of the huge volume of debris that blocked the Mangde-chu River. The landslide is divided into blocks and is assumed to be unstable. It is important to conduct more detailed work and assessment in a timely manner because the government of Bhutan has constructed hydro-power facilities along the Mangde-chu River.

This work was supported by JICA/JST SATREPS "Study on GLOFs (Glacial Lake Outburst Floods) in the Bhutan Himalayas".

Keywords: landslide, ALOS World 3D, geomorphic analysis, Cyclone Aila, Bhutan