

グラウンドアンカーのアンカー体定着部の支持機構の解明 Numerical interpretation of anchoring mechanism by using Bonded Particles Model

水戸 義忠¹; 西田 昂平^{1*}
MITO, Yoshitada¹; NISHIDA, Kohei^{1*}

¹ 京都大学大学院工学研究科

¹Fac. of Engineering, Kyoto University

グラウンドアンカーは地盤や構造物の補強手段として、多くの施工実績を数えている。アンカー体の構造形式は種々提案されているものの、その定着部におけるアンカー体および地盤の相互挙動については十分に解明されているわけではない。本研究ではアンカー支保の効果や適用限界の定量的な評価技術の向上を目指し、地盤内の亀裂の進展挙動を現実に近い形でシミュレートすることができることが知られている結合粒状体モデルを用いた個別要素法により、アンカーの引っ張り試験時におけるアンカー体定着部の力学挙動をシミュレートした。その結果、基本的な力学挙動を適切に表現することができた。

キーワード: グラウンドアンカー, 個別要素法, 亀裂発生・進展

Keywords: ground anchor, distinct element model, crack initiation and propagation

高速電気探査装置を用いた不飽和帯浸透水の3次元経時モニタリング 3D Time-lapse monitoring of water infiltration in the vadose zone by means of a high-speed resistivity measurement tool

稲崎 富士^{1*}; 今村 杉夫²; 坂西 啓一郎³
INAZAKI, Tomio^{1*}; IMAMURA, Sugio²; SAKANISHI, Kei'ichiro³

¹ 土木研, ² 地圏探査技術研究所, ³ モニー物探
¹Public Works Research Institute, ²CTGK Ltd., ³Mony Ltd.,

Infiltration process of water into the surficial vadose zone of an embankment was monitored at short intervals by means of a newly developed high-speed resistivity measurement tool. The tool can transmit 24 individual current signals and measure 24 potential responses simultaneously. A code division multiple transmission technique was adopted for the current signal transmission. It took only 30 seconds to obtain and store a dataset composed of a total of 576 (24 by 24) potential data along with time series waveforms. The tool enabled us to conduct high-speed time-lapse or dense 3D resistivity measurements in the field. We monitored infiltration process of surface water into the vadose zone of an actual embankment. A total of 4 current lines and 4 potential lines were set parallel on a flank of the embankment, and infused water into the vadose zone through a narrow and shallow trench dug on the crest. Electrode stakes were placed at 25 cm spacing along each line, and spacing between the lines was set to 50 cm. A total of 6,912 (12 pairs x 576) data were acquired at 5 min intervals in the beginning and at 30 min later. 3D electrical resistivity tomography (ERT) analysis, applied to the dataset composed of a total of 40 stages during the infiltration across two days, successfully imaged the extent of infiltrated water in the vadose zone. Consequently, our field measurements demonstrated the usefulness of dense time-lapse 3D ERT monitoring for the characterization of dynamic unsaturated permeability of the vadose zone of embankments in the field.

キーワード: 比抵抗, 不飽和帯, 浸透, 経時モニタリング, 3次元
Keywords: resistivity, vadose zone, infiltration, time-lapse monitoring, 3D

Reliability of hydraulic conductivity and specific storage structures estimated by Self - potential inversion.

Reliability of hydraulic conductivity and specific storage structures estimated by Self - potential inversion.

尾崎 裕介^{1*}; 三ヶ田 均¹; 後藤 忠徳¹; 武川 順一¹
OZAKI, Yusuke^{1*}; MIKADA, Hitoshi¹; GOTO, Tada-nori¹; TAKEKAWA, Junichi¹

¹ 京都大学工学研究科

¹ Graduate School of Engineering, Kyoto University

The objective of this study is evaluation of reliability of estimated hydraulic conductivity and specific storage structure from self-potential (SP) data under the realistic condition. The hydraulic conductivity and specific storage could be estimated from a transient SP inversion with the information of flux data. We have demonstrated that these parameters could be estimated with high resolution numerically in ideal case such that the required data is enough and artificial structure can be negligible. However, such condition is rarely satisfied in many field cases. As one of difficulties, the lack of flux data is assumed. The sampling rate of the measurement of flux data could be too low because of the difficulty of measurement. We adopt the spline interpolation to a sparse sampling data, and evaluate the reliability of estimated image using numerical tests. We calculate the SP signals following to the fluctuated pumping rate. We use the calculated SP signals with same sampling rate as calculation as an input data in the numerical test. The down sampled flux data is assumed to be the measured data in the test. Our numerical test shows that both hydraulic conductivity and specific storage structure can be estimated correctly from the interpolated deficient flux data with the trend almost same as the true variation. When the interpolated deficient flux data does not reconstruct the trend of the true variation, only the hydraulic conductivity structure can be estimated with low resolution while the specific storage could not be estimated at all.

In addition to the lack of flux data, the existences of artificial structures are also the obstacles for the SP inversion in a real field. For example, a high-conductive metallic casing pipe leads the SP signal far from the SP source without decrease of the electrical potential. Therefore, the estimated image ignoring this effect would be biased. We also evaluate this effect by numerical tests. The SP signals affected by the metal casing are used for the inversion test without considering the effect. Both hydraulic conductivity and specific storage near the metal casing in the inversion image are estimated to be a little lower than those of the test model. In addition, the strong artifact appears in the estimated image of specific storage. From these results, we conclude that the estimated image of hydraulic conductivity structure is robust under such unrealistic conditions. For the correct estimation of specific storage structure, the flux data with high quality is necessary.

キーワード: Self potential, Inversion, Hydraulic conductivity, Storage coefficient, Metal casing, Interpolated data

Keywords: Self potential, Inversion, Hydraulic conductivity, Storage coefficient, Metal casing, Interpolated data

採石場地域における、人工震源を用いた2か月間の陥没モニタリング実験：震源近傍における観測
An experiment of subsidence monitoring in the quarry area by a seismic source during two months: near source observation

上村 彩^{1*}; 笠原 順三¹; 藤井 直之¹; 牛山 素行¹
KAMIMURA, Aya^{1*}; KASAHARA, Junzo¹; FUJII, Naoyuki¹; USHIYAMA, Motoyuki¹

¹ 静岡大学
¹Shizuoka Univ.

Introduction

We tested to monitor temporal changes in the subsurface at the quarry area. At this quarry, there is a subsidence warning system to detect micro-earthquakes associated with the subsidence measured by seismometers. At the past subsidence, seismic vibrations were repeatedly observed during several months, but the 2014 subsidence showed only four vibration events preceding to the subsidence. It is thought that if we can observe any other temporal changes of the subsurface before the vibration, we could help to find subsidence. Therefore we carried out "seismic time-lapse observation". We used a control seismic source on the ground at fix location, and tested whether any changes of the subsurface changes during the observation period was caught or not.

Field test

We carried out one-week experiments twice in July and August of 2014. The first and the second experiments were from 16 to 21 in July and from 21 to 25 in August, respectively. We used electro-magnetic vibrator developed by Kawasaki Geological Engineering Co. Ltd as the seismic source. We set 100-second sweep from 10 to 50 Hz and 5-second rest with the GPS time accuracy and repeated 32 sweeps with 5 second rest in an hour. We operated the vibrator 12 hours consecutively at night (20:00 - 08:00).

We recorded accelerations signals of reaction-mass and base-plate with desired signals, and seismic waves at east of the source, south of the source, and near the source. Local warning system of 97 geophones also recorded these artificial seismic data.

Analysis

We carried out FFT conversions of observed data. We transformed two sweep sequences of seismic records to the frequency domain and stacked 16 sets of data in 1 hour. We calculated source signature using the reaction-mass and the baseplate accelerations of the vibrator. The transfer functions between the source and a receiver were obtained by the division of observed spectra by source signature. After applied window function in spectral domain, we inverse-transformed the data into a time domain.

Results

In this paper we report the characteristics near the source. When we set the amplitude of seismometer beside the source was 100, that of eastern seismometer (ca. 35m east of source) was 5, and that of southern seismometer (ca. 45m south of source) was 2 (vertical axis). The transfer function of 18 and 19 of July showed a change in comparison with others periods. There were few changes of the transfer functions during an experiment period of August.

Discussion and conclusions

We checked the weather condition during experimental periods. On July 18 03:00-04:00, 28mm/hour rainfalls measured by the neighboring precipitation observatory, and intense thunderstorm was recorded at the test field. In other periods, such heavy rainfalls were not observed. From these data, it is thought that the near surface layers including the water by rainfalls changed the transfer function of the test field.

Acknowledgements

This study was supported by the Center for Integrated Research and Education of Natural Hazard, of Shizuoka University. The field experiments was carried out by Kawasaki Geological Engineering Co., Ltd.

References

- Kasahara, J., et al., Real time Imaging of CO2 storage zone by very accurate-stable-long term seismic source, Energy Precedia, 2013d.
Kasahara, J., et al., Observation of very larger temporal changes due to the near surface effects and importance on the time-lapse study, Proc. Soc. #130 Exploration Geophysicists of Japan, 212-215, 2014.
Kubota, R., et al., Development of the Seismic ACROSS using electro-magnetic vibrator, Proc. "2nd KACST-KCUST-JCCP international workshop on Surface and Subsurface 4D Monitoring", KAUST Feb. 2014.
Kunitomo, T., et al., Active monitoring of the Earth's structure by the seismic ACROSS - Transmitting and receiving technolo-

STT13-04

会場:102A

時間:5月27日 15:00-15:15

gies of the seismic ACROSS, Proc. 1st International Workshop "Active Monitoring in the Solid Earth Geophysics", in Mizunami, Japan, S4-04., 2004.

キーワード: タイムラプス, 人工震源, 陥没, 地震学的手法, 防災

Keywords: time lapse, artificial seismic source, subsidence, seismic method, disaster prevention

陥没地域における時間変動イメージング Imaging of temporal changes at the surface subsidence area

笠原 順三¹; 藤井 直之^{1*}; 羽佐田 葉子²; 上村 彩³; 牛山 素行¹
KASAHARA, Junzo¹; FUJII, Naoyuki^{1*}; HASADA, Yoko²; KAMIMURA, Aya³; USHIYAMA, Motoyuki¹

¹ 静岡大学防災総合センター, ² 大和探査技術 (株), ³ 川崎地質 (株)

¹ CIRENH of Shizuoka University, ² Daiwa Exploration and Consulting Co. Ltd., ³ Kawasaki Geological Engineering Co. Ltd.

Introduction

We have carried out seismic studies to monitor the temporal change of subsurface in CCS, EOR and oil/gas reservoirs. For these studies, we have used ultra-stable seismic source called ACROSS (Accurately Controlled and Routinely Operated Signal System) (Kunitomo and Kumazawa, 2004). Because ACROSS seismic source is usually installed in heavy concrete block, it is difficult to relocate from one place to another. Instead, we used a conventional seismic source for this study. We carried out the time lapse experiments at one of quarry sites in Japan.

Method and Field observation

A conventional electro-magnetic seismic source with the modification of ACROSS methodology (Kubota et al., 2014) was used. A set of 100-second sweep from 10 to 50 Hz and 5-second rest with the GPS time accuracy was repeated 32 times in an hour. Seismic data of 97 15-Hz vertical geophones buried at 20 m depth and two 4.5-Hz borehole seismometers at 70 m and 200 m depths were sampled every 1 ms by the GPS time base too.

We repeated two observations in July and August in 2014. The first and the second one were between 16 and 21 in July and between 21 and 26 in August 2014, respectively. The size of the quarry is 2 km x 4.4 km. The experiments were only during the night time from 8 PM to 8 AM.

Analysis

We used similar analysis as the ACROSS processing (Kasahara et al., 2014). Observed data (1 or 12 hours) were stacked. Transfer functions between source and receivers are obtained by division of observed records by source signature calculated by accelerations on reaction mass and base plate. By 210 seconds (two sweeps) data for first stage stacking, we could estimate noise spectra. As the final stage, the residual waveforms of P portion were back-propagated by the method developed by Kasahara et al (2011).

Results

We obtained transfer functions for all datasets. By use of one hour data, we can clearly identify P arrivals up to 1.7 km distance. The transfer functions are quite stable though the seismic source is conventional type because we kept the seismic source at the same condition at the fixed point. However, if we compare the waveforms obtained in December 2013 with ones obtained in July or August 2014, we can notice large changes due to the differences of source installations.

Even within each week in July or August, the residual waveforms show changes just after P first arrivals. The P coda might be changed by temporal change of very shallow layers. By the back-propagation, we obtained the time-lapse image of the changing area. The changing areas are in two directions such as NW and SWW and they seem similar to the previous subsidence zone since 2000.

Acknowledgements

This study was supported by the Center for Integrated Research and Education of Natural Hazard, of Shizuoka University. The field experiments were carried out by Kawasaki Geological Engineering Co. Ltd.

References

Kasahara, J. et al., Imaging of ultra-long term temporal change of reservoir (s) by accurate seismic sources(s) and multi-receivers, in Extended abstract of "EAGE workshop on Permanent Reservoir Monitoring (PRM)", 40-44, Feb.-Mar., Trondheim, Norway, 2011.

Kasahara, J. et al., Real time Imaging of CO2 storage zone by very accurate-stable-long term seismic source, Energy Precedia, 2013.

Kasahara, J. et al., Observation of very larger temporal changes due to the near surface effects and importance on the time-lapse study, Proc. Soc. #130 Exploration Geophysicists of Japan, 212-215, 2014.

Kubota, R. et al., Development of the Seismic ACROSS using electro-magnetic vibrator, Proc. "2nd KACST-KCUST-JCCP international workshop on Surface and Subsurface 4D Monitoring", KAUST Feb. 2014.

Kunitomo, T., and Kumazawa, M., Active monitoring of the Earth's structure by the seismic ACROSS - Transmitting and receiving technologies of the seismic ACROSS, Proc. 1st International Workshop "Active Monitoring in the Solid Earth Geophysics", in Mizunami, Japan, S4-04., 2004.

STT13-05

会場:102A

時間:5月27日 15:15-15:30

キーワード: タイムラプス, 地震波イメージング, 逆伝搬, 陥没, アクロス, 地震学的手法
Keywords: time lapse, seismic imaging, backpropagation, subsidence, ACROSS, seismic method

数値シミュレーションに基づく微視的なシリカスケール成長に対する流体力学的影響の検証
The Hydrodynamic effect on silicate scale growth in microscopic flow inferred from numerical simulation.

水島 諒大^{1*}; 三ヶ田 均¹; 後藤 忠徳¹; 武川 順一¹
MIZUSHIMA, Akihiro^{1*}; MIKADA, Hitoshi¹; GOTO, Tada-nori¹; TAKEKAWA, Junichi¹

¹ 京都大学大学院工学研究科

¹ Kyoto University, Graduate School of Engineering

Formation of inorganic sparingly-soluble salts, anhydrite and silica from brine is known as a cause of scale in pipeline systems. Scaling is a key phenomenon to understand fluid-flow system in subsurface or sub-seafloor structure, because the scale growth strongly affects the fluid circulation of subsurface or sub-seafloor hydrothermal systems by choking any flow channel.

Several works (Takeno et al. 1998; Bolton et al., 1999) simulated the subsurface permeability change by the silica precipitation using the deposition rate law formulated on the basis of the simple kinetics (Rimstidt and Barnes, 1980). However it has been reported that the predicted magnitude of the deposition rate is extremely slower than measured values in the laboratories (Malate and O'Sullivan, 1992; Weir and White, 1996). By the way, a high rate growth of scale is often observed where the flow stagnates, so that the inhomogeneous flow could influence the deposition of the silica scale which is an alternative process of scaling. Nevertheless, relatively little research has been undertaken to investigate hydrodynamic effect on silica scaling. The aim of this work is to investigate the kinetic of adhesion of silica particles on the wall surface based on the hydrodynamic effect using the numerical simulation. Although we focus on the elementary (microscopic) process of the adhesion of silica particles, our ultimately goal is to help us to simulate the macroscopic flow in subsurface or sub-seafloor hydrothermal systems based on the hydrodynamic process by the feedback from this study.

We simulate the adhesion of silica particles using the lattice Boltzmann method (LBM) combined with the smoothed-particle method (SPM) (Nakayama and Yamamoto, 2008). This method uses fixed Eulerian grids for the fluid and represents the particles by certain smooth body forces in the Navier-Stokes equations instead of treating the particles as boundary conditions to the fluid. The LBM is adapted to the flow in the complex geometry due to the simple treatment of the boundary condition. The LBM combined with the SPM is the scheme having low computational cost to deal with many particles in a relatively simple manner. We assume that the particle whose velocity reaches the threshold of the convergence is adhered and is fixed on the wall. We use a two-dimensional parallel plate model in which flow rate and wall roughness are varied and derive the constitutive relation between the deposition rate and flow rate and wall roughness.

A high rate of scale growth is found in areas of low flow rate and it is consistent with the observation at the experiment (Garibaldi, 1980). Therefore, we conclude that the hydrodynamic effect on the growth of silica scale is important to understand the hydrothermal circulation.

Keywords: silica scaling, hydrodynamics, particle adhesion, lattice Boltzmann method, smoothed profile method

MMR 法による上部海洋地殻における比抵抗異常体の検出 Determining the three-dimensional position of the anomalous resistivity body in upper oceanic crust using MMR method

寺岡 拓也^{1*}; 島 伸和¹
TERAOKA, Takuya^{1*}; SEAMA, Nobukazu¹

¹ 神戸大学大学院理学研究科惑星学専攻

¹ Department of Planetology, Graduate School of Science, Kobe University

MMR 法はコントロールソース法の一つであり、上部海洋地殻の比抵抗構造を推定するのに有用なツールである。この手法は、ソースとして鉛直な双極子電流、レシーバーとして海底磁力計で構成されている。1次元の比抵抗構造は、ソース-レシーバー間距離と鉛直方向の双極子電流によって誘導される磁場の値の間の関係から容易に推定できる。しかし、3次元の比抵抗構造を見積もることは困難である。それゆえ、私たちは海洋地殻の比抵抗異常体を三次元的な位置を決定するために磁場異常マップを導入する。磁場異常は基準となる比抵抗構造(比抵抗異常体が存在しない)で誘導される磁場と比抵抗異常体が存在する場合に発生する磁場の差と定義する。磁場異常は1組のソースとレシーバーに対して得られ、磁場異常の値はレシーバーに対するソースの位置でプロットされる。レシーバーに対する磁場異常図は、多くの異なるソース点での磁場異常によって作成される。私たちは、様々なパラメータ(水平方向のレシーバーと比抵抗異常体の距離、比抵抗異常体の深さなど)を持つ10個のモデルに対し磁場異常を3次元フォワードモデリングによって計算しました。10個の異なるモデルに対する磁場異常マップは、磁場異常と比抵抗異常体の場所に関する2つの関係を導き出すために用いました。1) 比抵抗異常体は磁場異常のピークとレシーバーの位置を結ぶ直線下に存在する。2) 比抵抗異常体の深さは、比抵抗異常体の深さが比抵抗異常体と磁場異常のピーク間の水平距離に比例をしていることを示していることにより決定可能になる。これらの関係は2つ以上のレシーバーを設置し、磁場異常マップによってそれぞれの3次元的に比抵抗異常体の場所を推定可能にする。私たちの結果は、磁場異常マップが上部海洋地殻の比抵抗異常体の3次元的な位置を決定するのに有用であることを示し、それは MMR 法が海洋地殻の比抵抗異常体の分布を明らかにするためには、少ない台数の海底磁力計に対して多数の鉛直方向の双極子電流送信点を必要とすることを示唆している。

キーワード: 比抵抗構造, MMR 法, コントロールソース法, 海洋地殻

Keywords: resistivity structure, Magnetometric Resistivity method, controlled source method, oceanic crust

港湾鋼材に対する渦電流探傷法の高精度化の研究 Improvement of eddy current testing method for sheet piles on harbor

齊藤 拓也^{1*}; 三ヶ田 均¹; 武川 順一¹
SAITO, Takuya^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学大学院工学研究科

¹ Graduate School of Engineering, Kyoto University

The applicability and the feasibility of eddy-current testing method for the detection of wall thinning and surface crack of steel structure have been practically confirmed by field and laboratory experiments. Qualitative analysis of cracks has been empirically understood by analog analysis. There has, however, been a growing demand to quantitatively evaluate the cracks. We tackle this problem by use of time series of induced magnetic field by the cracks.

In the present study, we proposed a new digital analysis process to use the induced magnetic field waveform, and validated the effectiveness of the method using numerical simulations. First, we developed a high-speed electromagnetic simulator using a fictitious wave domain method to reproduce the conventional eddy current testing method for realistic sheet-piles seawater model. Then, we confirmed the features of the induced magnetic field waveforms by many types of cracks.

Paying attention to the residuals of the induced magnetic field waveform, we developed a novel migration procedure that has not been used up to now in electromagnetic field. Using this, we could get crack imaging without phase lag. For the evaluation of the crack position and wall thinning of the sheet piles, we also applied attribute analysis used in the field of seismic survey.

Through the application of the digital signal processing using induced magnetic field waveform, we could be successful with developing a high degree of accuracy of the eddy current testing method.

キーワード: 非破壊検査, 渦電流探傷法, 仮想領域法, マイグレーション処理, アトリビュート解析, 電磁気

Keywords: NDT, Eddy current testing method, Fictitious wave domain method, Migration, Attribute analysis, Electromagnetic

地中レーダへの位相アレイ型アンテナ適用性の研究 Applicability of Phased Array Antenna to Ground Penetrating Radar

菊地 海斗^{1*}; 三ヶ田 均¹; 後藤 忠徳¹; 武川 順一¹
KIKUCHI, Kaito^{1*}; MIKADA, Hitoshi¹; GOTO, Tada-nori¹; TAKEKAWA, Junichi¹

¹ 京都大学工学研究科

¹ Graduate School of Engineering, Kyoto University

Ground Penetrating Radar (GPR) has been widely used to detect objects in shallow subsurface. A bow-tie antenna, which is one of the major antennas, provides the clear cross sections in the shallow subsurface, especially under the survey line. On the other hand, the resolution across the survey lines depends on its interval. To overcome this problem, we tried to apply a phased array system to GPR. We conducted numerical simulations using a three-dimensional model composed of water, dry sand and some small perfect conductors with cubic shape. We compared two different kinds of antenna, a dipole antenna and a phased array antenna. The phased array antenna has an 8 x 8 sending unit and one receiving unit at the center of the radar. Both antennas have the length of about 0.5 meters. Our results show that the phased array antenna enhanced the noise-to-signal ratio and it also enhanced the amplitude of a scattered wave from a perfect conductor located out of the survey line. We conclude that the application of the phased array system to GPR has a potential to survey with wider angle than the conventional GPR system.

拡散過程を含む波動現象の新しい逆伝播手法の開発 Development of a novel backpropagation technique for waves traveling with diffusive process

齊藤 拓也^{1*}; 三ヶ田 均¹

SAITO, Takuya^{1*}; MIKADA, Hitoshi¹

¹ 京都大学大学院工学研究科

¹Graduate School of Engineering, Kyoto University

In the field of geophysics, several electromagnetic processes using waveforms, such as the full waveform inversion technique or the migration procedure, have been applied to visualize the subsurface structure.

While this process is very powerful and effective to interpret the subsurface structure, there are some difficulties in this process when the phase velocity takes complex value, i.e., the propagation of waves includes diffusive process. One method to avoid the instability due to the divergence of energy in the back propagation is to use the reciprocity to propagate from the locations of receivers to every imaging point. However, although this method to exploit the reciprocity theorem is a powerful scheme, amplitude attenuation and phase delay affects could be doubled due to the application of two-way forward propagation procedure in the imaging. In the conventional waveform inversion analysis, the result involves phase delay concomitantly during the back propagate process.

Our novel electromagnetic migration process could overcome this problem. Unlike conventional back propagate process, we invert the time of the residual waveform using forward propagation of this waveform. Then, we summed the resulting waveform without phase delay. Although the amplitude would takes place, it is pretty important to recover the phase delay caused by the forward propagation from imaging points to receivers.

We applied this migration process for the improvement of the eddy current testing method that is one of the non-destructive inspection techniques and confirmed this migration works well.

地表付近の異方性異常体による地震波動場変化の研究 Seismic wavefield distortion due to anisotropic anomalies near surface

米木 梨奈^{1*}; 三ヶ田 均¹; 武川 順一¹
YONEKI, Rina^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学大学院工学研究科

¹ Graduate School of Engineering, Kyoto University

Reservoir rocks and near surface materials are estimated to be strongly anisotropic for elastic wave propagation (e.g., Sone, 2012). Therefore, it is important to take anisotropy properties into account for estimating accurate geological structure using seismic exploration methods. There are many previous studies of elastic anisotropy, for example, azimuthal anisotropy of qP- and qSV-wave, S-wave splitting, etc. Most of these studies are based on the assumption that media is "weakly" anisotropic (Thomsen, 1986). When the anisotropy of media is not "weak", the assumption may not be applicable. However, the effect of "strong" anisotropy on the behavior of seismic wave propagation is still not well understood. In this study, we investigate the influence of strong anisotropy on received seismic waveforms using three-dimensional numerical models, and verified capability of detecting subsurface anisotropy. We assumed one model that contains a block of horizontally stratified isotropic layers (transversal isotropy with vertical axis of symmetry), while the other contains an isotropic inhomogeneity sharing the same block. We took the difference in the received waveforms of two models to see how the anisotropy of the medium influences the wavefield based on the orbital analysis of particle motion of the residual wavefield. Our results show that there are meaningful changes in the received waveform mainly due to P-wave and converted-wave (P-to-S) that might be generated by the anisotropy of the materials as secondary seismic sources. Since the anisotropy of the material behaves as secondary sources for incoming seismic waves, we concluded that seismic exploration method is applicable to estimate the anisotropic properties.

DONET地震計により観測されたエアガン記録および雑振動記録を用いた南海トラフにおけるS波異方性構造の推定 Estimation of S-wave anisotropy in the Nankai Trough using active and passive seismic dataset observed by DONET

木村 俊則^{1*}; 荒木 英一郎¹; 三ヶ田 均²; 小平 秀一¹; 三浦 誠一¹; 高橋 成実¹; 高江洲 盛史¹;
中野 優¹; 町田 祐弥¹
KIMURA, Toshinori^{1*}; ARAKI, Eiichiro¹; MIKADA, Hitoshi²; KODAIRA, Shuichi¹; MIURA, Seiichi¹;
TAKAHASHI, Narumi¹; TAKAESU, Morifumi¹; NAKANO, Masaru¹; MACHIDA, Yuya¹

¹ 独立行政法人海洋研究開発機構, ² 京都大学大学院工学研究科
¹JAMSTEC, ²Graduate School of Engineering, Kyoto University

In The Nankai Trough seismogenic zone, which is formed by the subducting Philippine Sea plate beneath the Eurasian plate with rate of 4-6 cm/year, mega-thrust earthquake occurred repeatedly every 100-150 years. In this area, cabled real-time observation system, DONET (Dense Oceanfloor Network Systems for Earthquakes and Tsunamis) and IODP C0002G borehole observatory, have been operated to monitor seismic activity, crustal deformation and tsunami propagation since August 2011 and January 2013, respectively.

For elucidating preparation and generation process of mega-thrust earthquake, which occurs repeatedly in subduction zones, it is important to observe and monitor the stress state, a key parameter governing its fault dynamics in the vicinity of seismogenic fault. In-situ stress analysis such as borehole breakout analysis may provide the orientation and the order of differential stress around the borehole, but it is still challenging to drill seismogenic fault, and is even more difficult to monitor temporal change of stress state, especially in wide area. Therefore, we have to consider another method to estimate stress state. In this study, we performed active and passive seismic data processing to obtain seismic anisotropy using dataset acquired by three-component seismometers installed in the DONET and IODP C0002G observatories. Seismic anisotropy can be a proxy of stress state, and by observing its temporal change is expected to identify change of stress around the seismogenic fault.

As active seismic dataset, we used airgun records observed by DONET and IODP C0002G seismometers during KR13-17 cruise conducted on November 2013. In this study, we used airgun records of eight circular shooting lines around these seismometers with radius of 3 km. In radial and transverse components computed from original horizontal records acquired by these circular shooting lines, P-S converted waves from bottom of shallow sediment were clearly visible. Fast symmetry axis of S-wave was estimated by fitting simple sine curve to amplitude fluctuation with shot-receiver azimuth in radial component, and then we obtained S-wave anisotropy in shallow sediment in the Nankai Trough wide area.

As passive data processing, we apply seismic interferometry method to ambient noise records acquired by horizontal components of each DONET and IODP C0002G seismometer. We computed zero offset 4-C ACF and CCFs (Auto-correlation function and Cross-correlation function) comprising V11, V12, V21, and V22 from ambient noise record observed by horizontal i- and j-direction components. V_{ij} represents impulse response which has i-direction source and j-direction receiver of each seismometer. In the ACF and CCFs calculate from long-term records for two years, several coherent events are visible. These events may be reflected S-wave from each layer, and S-wave splitting affected by seismic anisotropy. We then applied the Alford rotation and layer stripping method to the obtained 4-C ACF and CCFs. Then S-wave anisotropy direction and amplitude beneath each seismometer in each layer above the plate boundary were obtained.

We finally compared the obtained S-wave anisotropy from the active and passive methods. There are some differences between the obtained results from these methods. It may result from some reasons. Airgun records have been affected by 3-D structure around the observatory including seafloor topography and effect of undergoing P-wave anisotropy. Results from passive ambient noise components also have causes of error. The obtained 4-C ACF and CCFs might be contaminated by surface wave component. We now evaluate above mentioned effects to obtained results. Also, we intend to obtain S-wave anisotropy in deeper part from active airgun dataset using weak converted waves from deeper boundaries. We now plan to conduct next airgun survey in March 2015 by R/V Kairei with same settings as KR13-17 cruise to detect temporal change of S-wave anisotropy.

Keywords: S-wave anisotropy, Nankai Trough, DONET

地域ごとの不均質特性がP波立ち上がりを与える影響 Effect of local heterogeneous conditions on growth curves of P-wave

岡本 京祐^{1*}; 津野 靖士¹
OKAMOTO, Kyosuke^{1*}; TSUNO, Seiji¹

¹ 鉄道総合技術研究所

¹ Railway Technical Research Institute


In the Earthquake Early Warning (EEW) system, magnitude and epicentral location of an earthquake are estimated within several seconds after P-wave arrival. According to the Odaka (2003), the equation $Bt \cdot \exp(-At)$ is fitted to the early portion of P-waves. In the equation, A and B are constants and t represented time. From the B value, epicentral distances are estimated using an empirical relationship. The B value decreases as the epicentral distance increases due to the geometrical spreading of seismic waves. As the amplitude of P-waves decrease by travelling through the medium, the gradient of the early portion of P-waves also decrease. So that, the B value of a given epicentral distance marks the specific value and the epicentral distance can be obtained from the B value. However in practice, the B values of different earthquakes having the same epicentral distance show quiet different values. The gap in the B values is sometimes by several hundred times. One of the causes giving major effect on the B value is seismic attenuation due to heterogeneities in subsurface. Seismic waves propagating in heterogeneous medium attenuate due to seismic scattering and absorption. Tsukada et al. (2004) conducted a theoretical calculation on broadening of scalar wave envelopes based on three-dimensional von Karman type random medium. They found that the gap in the B values of different earthquakes having the same epicentral distance is accountable by difference in the scattering condition.

In this study, we theoretically calculate P waves in heterogeneous medium considering the conversion waves between P and S waves, which were ignored in the preceding studies while they give major effect on P-wave envelopes. We show that variation in condition of heterogeneities (in concrete correlation distance) changes the B value. In other word, regional conditions of heterogeneities make the different B values of a given epicentral distance. Then we compare the theoretically calculated B value with one calculated from earthquakes in 1996 - 2011 observed by the K-, KiK-net in Japan. We calculate a regional parameter of heterogeneities (correlation distance) in Japan which can account the fluctuation in the observed B values. As a result, it is found that the spatial distribution of the correlation distance (Figure 1) shows similar tendency with that of a parameter reflecting local heterogeneities, like coda-Q.

In this study we hypothesize that variation in the condition of heterogeneities makes the B value fluctuate significantly and verify it. If we treat the fluctuation in the B values by considering the local condition of heterogeneities, estimation on epicentral distances becomes more accurate. It will improve accuracy of the EEW. Furthermore, B values, that is, initial curve of P-waves can be an exploration tool for local heterogeneities. The early portion of P-wave has a strong advantage that the Born approximation can be used. Complex heterogeneities can be treated by the simple equation.

キーワード: 不均質, ボルン近似, 早期警報, 散乱, P波立ち上がり, B- Δ 法

Keywords: heterogeneities, Born approximation, EEW, scattering, growth curve of P-wave, B-delta method

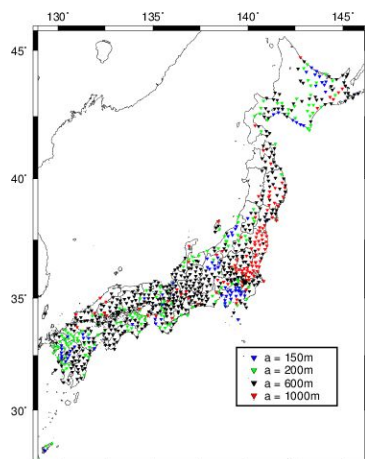

Development of hydraulic low frequency marine seismic vibrator Development of hydraulic low frequency marine seismic vibrator

小笹 弘晃^{1*}; 三ヶ田 均²; 佐藤 文男¹; 村上 文俊³; 浅川 栄一³

OZASA, Hiroaki^{1*}; MIKADA, Hitoshi²; SATO, Fumio¹; MURAKAMI, Fumitoshi³; ASAKAWA, Eiiichi³

¹ 株式会社 IHI, ² 京都大学, ³ 株式会社地球科学総合研究所

¹IHI Corporation, ²Kyoto University, ³JGI, Incorporated

A towed marine seismic vibrator using hydraulic servo system has been developed. We have fabricated a mock-up source with a slightly, say 60-70 %, scaled size to the real design and conducted several evaluation tests in the sea. The vibrator was towed approximately at a depth of 250m in water. The performance such as maximum sound level, frequency characteristic, horizontal directivity, and vertical directivity of the sound field generated from the source mock-up was examined as a field experiment. The sound source level and the frequency characteristic were equal to or higher than the estimated specification between 3Hz and 300Hz. The comparizon of horizontal with the vertical intensity of the generated sound fields indicate that the generated sound field could be regarded nearly omnidirectional. Seismic survey trial using a short streamer was also conducted following the source characteristic examination. A shot gather was acquired by several emission patterns with different frequency bands in the trial. The results showed the performance of the mock-up to be usable as seismic source in shallow water as a vibrator source that uses mechanical oscillation structure.

Keywords: seismic, vibrator, hydraulic

Study of the exploration focused on shear waves generated by a dipole source Study of the exploration focused on shear waves generated by a dipole source

永井 祐気^{1*}; 津田 明憲¹; 畠中 宏明¹; 田上 稔¹; 田中 浩一郎¹; 佐藤 文男¹; 三ヶ田 均²
NAGAI, Yuki^{1*}; TSUDA, Akinori¹; HATANAKA, Hiroaki¹; TAGAMI, Minoru¹; TANAKA, Koichiro¹;
SATO, Fumio¹; MIKADA, Hitoshi²

¹ 株式会社 IHI, ² 京都大学大学院工学研究科

¹IHI Corporation, ²Kyoto University

For the exploration and the development of the hydrocarbon fluid resources such as oil, natural gas, etc., a 3D seismic exploration method has been applied to investigate subsurface structures. In particular, the utilization of airguns and multiple streamers have made use of 3D surveys in practice in the marine environment. Marine seismic sources are in general explosive or impulsive so that the compressional and its mode converted waves have been used in the exploration. For further effective exploitation of the resources, such as enhanced oil recovery, it is necessary to apply much higher exploration technologies. Shear waves are also a candidate to be utilized to investigate physical properties of subsurface materials. Therefore, shear waves have been of interest in research in recent years, but, unfortunately, are known as difficult to be acquired in the marine environment due to water layer in which no shear wave travels through. The generation of shear waves without touching the seafloor is also thought impossible in water. For efficient surveys using shear waves, we need to find an alternative way to generate shear waves.

In this paper, a feasibility study of the exploration focused on the generation of the shear wave is conducted using a dipole source that has been used to generate shear waves in geophysical logging. We first made a scaled model of a deep-tow seismic survey using solid material with a set of reflectors and an overlain water layer. Two dilatational sources with the opposite phase to each other are simultaneously excited to form a point force in the water parallel to solid-water interface. The sound field generated by the dipole in water creates a stress field tangential to the solid-water interface so that the shear wave is generated in the solid. For the model, we performed both acoustic experiment and numerical simulations to see both compressional and shear reflection profiles. Although the signal-to-noise ratio of the acoustic experiment is not sufficiently high, we confirmed that shear reflection profile could be produced. It should be noted that shear waves could be produced in water using multipolar sources fired close to the seafloor, and that some improvements to increase shear wave energy more than the compressional wave need to be pursued for practical use of multipolar sources.

Optimal correction of data from misoriented multi-component geophysical sensors Optimal correction of data from misoriented multi-component geophysical sensors

KRIEGER, Lars^{1*}; GRIGOLI, Francesco²
KRIEGER, Lars^{1*}; GRIGOLI, Francesco²

¹Department of Earth Sciences, School of Physical Sciences, University of Adelaide, Adelaide (AUS), ²Institute of Earth and Environmental Sciences, University of Potsdam, Potsdam (GER)

¹Department of Earth Sciences, School of Physical Sciences, University of Adelaide, Adelaide (AUS), ²Institute of Earth and Environmental Sciences, University of Potsdam, Potsdam (GER)

One of the most important problems affecting geophysical data acquisition procedures is related to the misorientation of multi-component sensors with respect to a common reference system. Misoriented sensors affect data analysis procedures, which can lead to errors in results and interpretations. These problems generally occur in applications in which the orientation of the sensor cannot be actively controlled and is not known a priori. Common examples are geophysical sensors deployed in borehole installations or on the seafloor. In this presentation we introduce two methods to optimally correct data sets from misaligned sensors.

Firstly, we consider two-component time-series data. These commonly result from the assumption that the vertical axis of a three-component sensor is correctly determined, and therefore the data from that respective component can be excluded from the correction process. This is a common approach and it is used in many applications. We show that the optimal misalignment-correction for such a two-component data set can be estimated in a single, non-iterative calculation step (c.f. Grigoli et al., 2012). The result is optimal with respect to the l_2 norm of the overall deviation between the re-oriented and the optimal data. We demonstrate the functionality of our method by applying it to synthetic and real data examples (seismic data; Vertical seismic profile, Ocean bottom seismometers, Seismological array).

Although the simplification of neglecting the third sensor component is commonly applied, and the resulting deviations are assumed to be negligible, it is still beneficial to take the full information contained in the data sets into account. Therefore, we have developed a reorientation algorithm for multi-component geophysical sensors (i.e. two- and three-component sensors). In the second part of this presentation, we introduce this quaternion-based method, which yields an analytical solution for the (relative) reorientation of sensors in three dimensions. We show that our method is not only fully functional, but also that it is superior to the commonly applied approach of a grid search over the parameter space for finding optimal rotation parameters (c.f. Krieger & Grigoli, 2015). We also demonstrate that the assumption a potential deviation of the vertical sensor component from the true vertical only leads to small errors in the result is not necessarily true. Hence, we conclude that it is important to rely on an analytical estimate of reorientation parameters, and that the inclusion of all sensor components in the process of this estimation is important. By introducing our new approach to the correction of sensor mis-alignment, we can overcome the dependency on approximative solutions and eliminate systematic sources of errors in standard time-series data processing.

References:

Grigoli, F., Cesca, S., Dahm, T., Krieger, L. (2012); *A complex linear least-squares method to derive relative and absolute orientations of seismic sensors*; *Geophysical Journal International*; 188(3); 1243-1254.

Krieger, L. & Grigoli, F. (2015); *Optimal reorientation of geophysical sensors: A quaternion-based analytical solution*; *Geophysics*; 80(2); F1-F12.

キーワード: 2D/3D sensor re-orientation, Algorithm, Quaternions, Vertical Seismic Profile, Ocean Bottom Seismometers, Array seismology

Keywords: 2D/3D sensor re-orientation, Algorithm, Quaternions, Vertical Seismic Profile, Ocean Bottom Seismometers, Array seismology

複雑な傾斜層に対する反射法地震探査データ処理における等価オフセット・プリスタック・マイグレーションの研究
Applicability of prestack equivalent offset migration of reflection seismic data

三ヶ田 均¹; ジョン ダンイン¹; 武川 順一^{1*}
MIKADA, Hitoshi¹; JEON, Danin¹; TAKEKAWA, Junichi^{1*}

¹ 京都大学
¹ Kyoto Univ.

Recently equivalent offset migration (EOM) has been applied to image the subsurface structure in seismic surveys. In the present study, we investigate the effectiveness of EOM for complex geological structures with inclined layers using numerical simulations. In our experiments, the geological boundaries have different dipping angles. We estimate the underground structure using EOM, and compare the result with that from dip moveout (DMO) which is a popular method for the dipping structures. The result of EOM achieve similar resolution to DMO whereas the computational cost of EOM is fifth part of that of DMO. Our result indicates that EOM has advantage over DMO.

キーワード: 等価オフセットプリスタックマイグレーション, 共通散乱点
Keywords: Prestack equivalent offset migration, Common scattering point

音波検層における全波形インバージョン適用可能性の研究 Applicability of Full Waveform Inversion in Sonic Logging

石倉 一樹^{1*}; 三ヶ田 均¹; 武川 順一¹
ISHIKURA, Kazuki^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学工学研究科

¹ Graduate school of Engineering, Kyoto University

Sonic logging has been widely used for many years to acquire physical properties of hydrocarbon reservoirs, and then, velocity analysis is performed by detection of first break or slowness time coherence (STC) method.

The estimation of velocity and quality factors is important for the identification of fluid contacts, e.g. oil-water contact.

But the resolution of existing methods is restricted to 6 inch by receiver distance of logging tool. In sonic logging, high resolution imaging and detection of oil-water contact (OWC) are recognized as urgent issues. On the other hand, many studies in seismic reflection survey focus on full-waveform inversion (FWI) as an innovative technique to acquire high resolution velocity structure in the subsurface. However, the applicability of FWI to the sonic logging has not been revealed yet. So, we examined the applicability of FWI using some numerical experiments.

Our results show that gas-oil contact and OWC can be detected with higher resolution than the conventional methods whose resolution is 6 inch. Therefore, we conclude that we could apply FWI to sonic logging with high resolution imaging.

Keywords: FWI, OWC, GOC

フルウェーブを用いた坑井間トモグラフィーによる密度定数推定法の研究 Density parameter estimation in full waveform well-to-well tomography

寺西 慶裕^{1*}; 三ヶ田 均¹; 武川 順一¹
TERANISHI, Keisuke^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学大学院工学研究科
¹ Kyoto university

The importance using the full waveform is widely recognized in seismic explorations. Especially, seismic full waveform inversion (FWI) can detect the high-resolution physical properties in the subsurface. Since the seismic wave propagation cannot be controlled by not only P-wave and S-wave velocities but the density of the medium, it is necessary to include all three parameters in the modeling and inversion (Vireux and Operto, 2009). However, multi-parameter FWI is a challenging problem because parameters are coupled with each other, and the coupling effects prevent from the appropriate estimation of the elastic parameters. Especially, the estimation of density is a very difficult issue because plural elastic parameters including density increases the dimension of the solution space, so that any minimization could be easily trapped in local minima. Therefore, the density is typically estimated using an empirical formula such as the well-known Gardner's relationship (Gardner et al., 1974) or is fixed to a constant value. Since the density parameter is directly included in the elastic wave equation, it is necessary to check whether it is possible to estimate density value exactly or not. Moreover, the Gardner's relationship is an empirical equation and could not always show the proper relation between V_p and density (e.g., in the salt dome). Pre-salt exploration conducted in recent decades could accordingly be influenced.

The objective of this study is to investigate the feasibility of the estimation of density structure when the density is inverted with the other elastic parameters and to assess if density is separable from the other parameters. We perform 2D numerical simulations in order to investigate the most important factor in the inversion of density structure as well as V_p and V_s . We conducted four numerical experiments with different inversion strategies; i.e. we invert 1) V_p and density simultaneously, 2) V_s and density simultaneously, 3) V_p , V_s and density simultaneously, and 4) only density. Considering these results, the density inversion results are affected by the other parameters and inversion results are worse than the result of inverting solely density. Compared with the other parameters, the density has a little influence on the waveform, and it is likely to be ignored in the inversion. Moreover, we conducted grid analysis of misfit function (Gholami et al., 2013) to estimate the contribution of each parameter to misfit function. These results suggest that solely inversion of density is the most effective to estimate the reliable value, on the other hand to estimate density with the other parameters is captured in the local minima.

キーワード: 全波形逆解析, 密度
Keywords: full waveform inversion, density

Full waveform inversion for subsurface exploration using vertical cable seismic data Full waveform inversion for subsurface exploration using vertical cable seismic data

JAMALI HONDORI, Ehsan^{1*} ; MIKADA, Hitoshi² ; ASAKAWA, Eiichi¹ ; MIZOHATA, Shigeharu¹
JAMALI HONDORI, Ehsan^{1*} ; MIKADA, Hitoshi² ; ASAKAWA, Eiichi¹ ; MIZOHATA, Shigeharu¹

¹JGI, Inc., ²Kyoto University

¹JGI, Inc., ²Kyoto University

Subsurface exploration for natural resources is mainly conducted by surface seismic experiments which use receiver arrays on the surface to record the propagated energy from seismic sources and produce an image of the earth after processing. Sources and receivers could be placed on the ground, i.e. land acquisition, or towed in the sea by a vessel, i.e. marine acquisition, in order to cover the desired area of the imaging. This requires appropriate data acquisition geometry and optimized data processing flows for reliable subsurface images. However, when the target is a small area in the marine environment with certain obstacles like platforms or buoys, in the deep sea conditions, or in the geologically complex areas the surface seismic exploration fails to deliver a high resolution image either because of the restrictions in the data acquisition or inefficiency of the data processing algorithms. Instead, a Vertical Cable Seismic (VCS) experiment provides a high resolution image for the investigation of the natural resources below sea floor. In the VCS configuration vertical arrays of hydrophones are deployed near the sea floor and are kept in the vertical situation by using an anchor in the bottom and a buoy at the top of the cable. Seismic source is towed by the vessel and the data is recorded for every shot point, then processing and Pre-Stack Depth Migration (PSDM) of the data yields an image of the structures. However, a good PSDM section is achieved only if accurate wave velocity model is available for the migration. Full Waveform Inversion (FWI) of the seismic data is a reliable tool to reconstruct the subsurface properties by using pre-stack recorded data. We use full waveform inversion of the acoustic data recorded by a VCS simulated experiment to develop P wave velocity model.

In the FWI workflow acoustic wave equation is solved using 2D finite difference method to produce waveforms using an initial model. Then, misfit between recorded and simulated waveforms is minimized via a local optimization algorithm, e.g. preconditioned conjugate gradient, to update the model. This process is iterated until a convergence criteria is satisfied or the maximum number of FWI iterations is reached. Because of the nonlinearity of the problem, a good initial model which is close enough to the exact solution is necessary. For the simulated experiment, we considered a marine environment with water depth of 900 m and lateral extension of 5000 m. We used four vertical cables located near the sea floor in the middle of the model area. Each vertical cable has 8 hydrophones spaced every 10 m and the deepest hydrophone is 10 m above the sea floor. Seismic sources are located 10 m beneath sea level and 500 shots at every 10 m are used for the VCS experiment. VCS experiment showed reliable results to prove that it is very useful for high resolution imaging of a small area in the subsurface, which is not practically resolvable by using surface seismic experiments.

キーワード: full waveform inversion, vertical cable seismic, acoustic

Keywords: full waveform inversion, vertical cable seismic, acoustic

メッシュフリー差分法を用いた解像度可変型フルウェーブフォームインバージョン An adaptive resolution FWI using a mesh-free finite-difference method

武川 順一^{1*}; 三ヶ田 均¹

TAKEKAWA, Junichi^{1*}; MIKADA, Hitoshi¹

¹ 京都大学

¹Kyoto Univ.

We developed an adaptive resolution full-waveform inversion (FWI) using a mesh-free finite-difference method (MF-FDM). The conventional finite-difference methods (FDMs) have been widely used to calculate full-waveform synthetic traces in FWI. Most of FDMs are based on the assumption of the regular alignment of computational grids. This causes the computational burdens if the analysis model includes large velocity contrast, e.g. salt dome model. We propose a strategy to use MF-FDM for reducing computational cost in simple and seamless manners. Since MF-FDM calculates full-waveform synthetic trace with irregular distribution of nodes, our strategy can arrange adaptive resolution nodes depend on the velocity structure, i.e. fine nodes are used only around low velocity zones. We investigate the effectiveness of the method using some numerical experiments. Our results indicate that the method can successfully reduce the computational cost in simple and seamless manners.

キーワード: フルウェーブフォームインバージョン, メッシュフリー差分法, 数値シミュレーション

Keywords: full-waveform inversion, mesh-free finite-difference method, numerical simulation

亀裂性岩盤を対象とした水圧破砕法における破砕流体の粘性が及ぼす影響
Influence of pre-existing fracture and viscosity of injected fluid on effective hydraulic fracturing

長曾 真弥^{1*}; 三ヶ田 均¹; 武川 順一¹
NAGASO, Masaya^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学工学研究科

¹ Graduate School of Engineering, Kyoto University

Hydraulic fracturing has been applied for enhanced recovery of hydrocarbon reservoirs and enhanced geothermal systems. In this technique, rock mass is fractured by applying fluid pressure on borehole wall. For the estimation of the propagation of hydraulically induced fractures, the strike of pre-existing fractures and the viscosity of injected fluid should be taken into consideration. Although theoretical solution shows that hydraulically induced fracture propagates in the direction of maximum principle stress in a homogeneous medium, the propagation direction in real field does not always correspond to the expected direction from the regional stress due to pre-existing fractures. The viscosity of injected fluid also influences the behavior of hydraulic fractures. The injection of high viscous fluid could improve the permeability of rock and enhance the effectiveness of the hydraulic fracturing. In order to examine the influence of pre-existing fractures and of injected fluid viscosity on the propagation of hydraulic fractures, we performed a series of numerical simulations for hydraulic fracturing in naturally fractured rock by using a 2D flow-coupled discrete element method. In our simulations, fluid pressure is applied to a borehole wall, and hydraulically induced fracture would intersect with an inclined pre-existing fracture adjacent to the borehole. We perform simulations with three different strike angles of the pre-existing fracture, using two different viscosity of fluid. As a result, hydraulic fracture propagates beyond the pre-existing fracture when high viscous fluid is injected, while it is trapped by the pre-existing fracture in the low viscous fluid injection. This is caused by the strong fluid pressure on the borehole wall and the surface of the pre-existing fracture in the high viscosity case. The results also show that the higher the intersection angle of hydraulic fracture and pre-existing fracture is, the more hydraulic fracture propagation is retarded. We conclude that high viscous fluid could be recommended for effective hydraulic fracturing when the hydraulic fracture has high intersection angle to pre-existing fracture.

キーワード: 水圧破砕法, 個別要素法, 粘性, 既存亀裂

Keywords: Hydraulic Fracturing, Discrete Element Method, Viscosity, Pre-existing Fracture

地域応力場を考慮した水圧破碎による亀裂進展 Fracture propagation stimulated by hydraulic injection under in-situ stress field

大久保 蔵馬^{1*}; 三ヶ田 均¹; 武川 順一¹
OKUBO, Kurama^{1*}; MIKADA, Hitoshi¹; TAKEKAWA, Junichi¹

¹ 京都大学大学院工学研究科
¹ Kyoto University

Hydraulic fracturing is a major scheme for improving the production of non-conventional energy resource as well as horizontal well. It increases the permeability of reservoirs which is usually tight and low permeability by making fracture net in the reservoirs. Acoustic Emission (AE) is observed on the ground surface or in observation wells to monitor the expansion of the fracture net by fluid injection. Laboratory experiments indicate that hydraulic fractures would propagate in the direction of the maximum principal stress around the fractures. Hence it is assumed that in-situ stress could play an important role for the behavior of hydraulic fracture propagation in the field scale. It is, however, difficult to observe the fracture propagation directly due to the depth of the reservoir layer (>2km generally). Therefore, the ratio of tensile crack to shear one induced by the fluid injection has not been revealed yet.

Distinct element method (DEM) has often been applied to the simulation of the hydraulic fracturing, which shows the fracturing mechanism around the injection well, while it has a limit of analytical area around the borehole due to the computational cost. It is, therefore, challenging to simulate hydraulic fracturing in the real scale (>10m). In this study, we adopted the extended finite element method (X-FEM) and add a new degree of freedom for the effects of the fluid inside the fracture (Chen 2013). We optimized this scheme to simulate the fracture propagation in the large scale under in-situ stress field. The advantages of this scheme are following. a) Fractures are defined independent of the mesh, which could reduce the computational cost due to the re-meshing process. b) It maintains the continuity of displacement at each node on the elements. It would bring stable stress field and fracture simulations. We developed the hydraulic fracturing simulation tools with this scheme and explored the mechanism of fracture propagation triggered by the fluid injection.

For the evaluation of the fracture propagation, we made a simulation model in real scale and put external forces as in-situ stress. The aim of this simulation is to investigate the influence of the in-situ stress on the fracture propagation and fracturing mechanics. To understand the effect of the stress field around the fracture tip, we also created a heterogeneous model of P-wave velocity. We conducted two simulations with the homogeneous and heterogeneous models, and obtained the characteristics of the fracture propagation in the geological formation.

The first result, using the homogeneous model, shows that fracture propagates with not only tensile but also shear stress components even if the injected fluid inside the fracture presses outward. It suggests that hydraulic fractures could generate mixed-mode crack. The second result from the heterogeneous model simulations indicates that the in-situ stress field could be disturbed by the heterogeneity and the fractures no longer propagate simply in the direction to the maximum principal stress from far field. It indicates that while fractures propagate in a linear fashion in the homogeneous model, they propagate in a turbulent manner in the heterogeneous model.

We investigated the influence of the in-situ stress field on the hydraulic fracture propagations in the geological layer. It is suggested that the hydraulic fractures would propagate with both tensile and shear crack that is mixed-mode cracks. In addition, the macroscopic heterogeneity in the subsurface could affect the behavior of the microscopic fracture propagation. These results might help to estimate the radiation of the AE and evaluate the fractured reservoir in the real field.

キーワード: 水圧破碎, 拡張有限要素法, 原位置地圧, 亀裂進展
Keywords: Hydraulic Fracturing, X-FEM, In-situ stress, Fracture propagation

地表磁場成分を用いた電磁マイグレーションによる地下構造可視化の研究 Subsurface imaging with EM migration of magnetic fields

兵藤 大祐¹; 後藤 忠徳¹; 三ヶ田 均¹; 武川 順一^{1*}
HYODO, Daisuke¹; GOTO, Tada-nori¹; MIKADA, Hitoshi¹; TAKEKAWA, Junichi^{1*}

¹ 京都大学大学院工学研究科

¹ Graduate school of Engineering, Kyoto University

The underground impedance data is estimated by observing and analyzing both electric and magnetic components in the magnetotelluric (MT) method. Although this method is often used in fault surveys or geothermal prospecting, it has the two problems caused by the observation of electric components. One is that the static shift effect bias the apparent resistivity at the surface, and the other is that it is difficult to secure broad places for the observation of electric fields. Furthermore the analysis of electromagnetic data is also challenging because of its high computational costs, especially in three-dimensional cases. This causes barriers to application to large amounts of field data. So, a new technology which can estimate the subsurface information simpler and faster is needed.

In this study, we suggest the new method to use magnetic components at the surface in order to overcome these problems. The static shift effect can be controlled and the great mobility of magnetometers makes it possible to obtain data at a lot of sites, if magnetic fields are used as analysis data. Magnetic components are applied to not inversion method but migration method, which is generally the visualization method in seismic data processing to save computational cost. We adopted the PSPI (Phase-Shift Plus Interpolation) method (Gazdag and Sguazzero, 1984) and applied this method to the magnetic fields at the surface. In the case of applying the migration technique to the electromagnetic data, it is very important to select the correct frequency band to prevent the multiple reflection and attenuation of the electromagnetic waves.

Through the numerical calculation analyses and the analysis of field data, it was confirmed that applying migration method to magnetic components is the effective. In this migration method, the large value of reflection intensity is estimated around the area if the proper resistivity structure is assigned to the migration. This means that the resistivity structures in the subsurface have an effect on the migration results. In the analysis of the real field data around an active fault, large reflection intensity was estimated beneath the active fault. We discussed the results of the estimated apparent resistivity cross section and the migration results with the geological structure of the area and a previous 2D MT inversion result.

In conclusion, our method can estimate the underground resistivity structure simpler and faster. The combination of this electromagnetic migration method and inversion has possibility to reveal more detailed subsurface resistivity structure.

Keywords: electromagnetic migration, magnetic fields

Pareto-optimal Joint Inversion Modelling and Data Set Compatibility Analysis Pareto-optimal Joint Inversion Modelling and Data Set Compatibility Analysis

SCHNAIDT, Sebastian¹ ; KRIEGER, Lars^{1*} ; HEINSON, Graham¹
SCHNAIDT, Sebastian¹ ; KRIEGER, Lars^{1*} ; HEINSON, Graham¹

¹Department of Earth Sciences, School of Physical Sciences, University of Adelaide, Adelaide (AUS)

¹Department of Earth Sciences, School of Physical Sciences, University of Adelaide, Adelaide (AUS)

In the process of modelling geophysical properties, jointly inverting different data sets can greatly improve the results. In order to conduct a joint inversion modelling, a relationship between the different data sets has to be established, which can be either be of analytical or structural nature. Classically, the joint inversion problem is then expressed as a scalar objective function, which combines the misfit functions of all involved data sets combined with a joint term accounting for the assumed connection between the data sets. This method bears two major disadvantages. Firstly, a weighting of the data sets is enforced by aggregating all misfit terms. Secondly, the data sets cannot be assessed with respect to their compatibility. Data sets are compatible if they are sensitive to similar physical features, and the joint interpretation of incompatible data sets can lead to incorrect resulting models.

In order to generate unbiased joint inversion models, it is important to mitigate the influence of weighting and to analyse the compatibility of data sets. Therefore, we have developed a new approach to the joint inversion modelling of geophysical data. We present *MOJO*, a Pareto-optimal multi-objective joint inversion algorithm. It is based on an advanced genetic algorithm, hence it does not only calculate a single optimised model, but a distribution of possible models as final result. In contrast to common approaches, *MOJO* treats data sets as a separate objectives, which avoids spurious weighting. Additionally, we use the output of *MOJO* to calculate and evaluate curves of the trade-off between the different objectives. The shapes and evolutions of these curves yield a measure for the compatibility of the used data sets. Furthermore, the evaluation of the resulting model distribution provides valuable uncertainty estimates.

キーワード: Multi-objective optimisation, Joint-inversion, Data set compatibility, Model uncertainty, Magnetotellurics
Keywords: Multi-objective optimisation, Joint-inversion, Data set compatibility, Model uncertainty, Magnetotellurics

Interferometric location of microseismic events induced by gas storage operations Interferometric location of microseismic events induced by gas storage operations

GRIGOLI, Francesco^{1*}; CESCA, Simone²
GRIGOLI, Francesco^{1*}; CESCA, Simone²

¹Institute of Earth and Environmental Sciences, University of Potsdam, Germany, ²GFZ German Research Centre for Geoscience, Section 2.1 Earthquake and Volcano physics, Germany

¹Institute of Earth and Environmental Sciences, University of Potsdam, Germany, ²GFZ German Research Centre for Geoscience, Section 2.1 Earthquake and Volcano physics, Germany

Underground gas storage is a common industrial operation that consist in the injection of natural gas in aquifers, underground cavities or depleted hydrocarbon reservoirs. Gas is seasonally injected or extracted to meet the market demand. Although these operations rarely stimulated seismicity, a recent case at the Castor platform in the offshore Spain was accompanied by a significant seismic sequence, culminated with a magnitude Mw 4.3 earthquake (Cesca et al. 2014). Ad hoc microseismic monitoring networks are nowadays extensively used to analyse the induced microseismicity generated by these industrial operations. However, in many cases, the lack of local microseismic monitoring networks limits the performance of the standard data analysis procedures. In such cases, non conventional methods need to be established. Within this context, we extend here the analysis of triggered seismicity related to gas injection at the Castor platform, in September-October 2013, where standard location procedures failed for magnitudes below Ml 2. In this work we relocate these low magnitude events using an interferometry based location method (Snieder and Vrijlandt, 2005). This technique exploits slight changes in the coda waves between two seismic events within a cluster. We proof that microseismic events can be classified in different families by combining a waveform correlation analysis and a clustering technique. Clustered events are characterized by a high similarity of waveforms, which implies a similarity in both source mechanism and location. In these conditions, the analysis of seismic coda recorded at a single receiver can be used to infer a measure of the spatial separation between two seismic sources. Coda waves are radiated in all directions with a radiation pattern determined by the source mechanism and a small change in the source position affects the interference pattern of the scattered waves that constitute the coda. This change in the coda waves is used to constrain the interevent distance for each events pair. Absolute locations can be then retrieved by considering all interevent distances, a procedure which requires at least three reference locations. We discuss the potential of the coda interferometry location approach to monitor triggered and induced seismicity, by relocating about 1000 seismic events of the September-October 2013 seismic sequence offshore Spain, close to the Castor project injection platform. Results are used to discuss the possible proposed faults scenarios.

References:

Cesca, S. et al. 2014, The 2013 September-October seismic sequence offshore Spain: a case of seismicity triggered by gas injection?, *Geophys. Jour. Int.*, doi: 10.1093/gji/ggu172

Snieder, R., and Vrijlandt, M., 2005. Constraining the source separation with coda wave interferometry: Theory and application to earthquake doublets in the Hayward fault, California, *J. Geophys. Res.*, doi:10.1029/2004JB003317

キーワード: Induced seismicity, Microseismic monitoring, Seismic event location, Seismic interferometry
Keywords: Induced seismicity, Microseismic monitoring, Seismic event location, Seismic interferometry

Retrieving Focal Mechanism using Double Couple - Tensile Constrained Inversion : Method and Synthetic Tests

Retrieving Focal Mechanism using Double Couple - Tensile Constrained Inversion : Method and Synthetic Tests

飯田 周平^{1*}; 金 亜伊¹
IIDA, Shuhei^{1*}; KIM, Ahyi¹

¹ 横浜市立大学
¹Yokohama City University

Understanding the source characteristics of hydraulic fracturing induced microearthquakes is expected to provide better understanding of both the fracturing process and the influence of pre-existing structures on the distribution of events. However, details of the source characteristics of the microearthquakes remain largely unknown. One controversial issue is whether a significant volumetric change occurs because of the stimulation. Answering this question is important to provide the insight of the future effective and safer hydraulic fracturing. Although the moment tensor inversion is one of the best approaches for studying source mechanisms, it is often biased due to uncertainty of geologic model, sparse receiver coverage and low signal to noise ratio for this types of induced earthquake analyses. So it is necessary to quantify the factors which bias the solution. Herein, to address this question, we modified the double couple focal mechanism inversion method using the body-wave amplitude ratio and polarities developed by Snoke (2003) for stimulation induced microearthquake analysis. Since our goal is to figure out whether it is possible to identify volumetric change with limited receiver azimuthal coverage, it is necessary to incorporate the non-double couple mechanism in the inversion. Since the mechanism of the microearthquakes can be considered as 1) shear slip along the pre-existing fracture surface, 2) an tensile displacement which increase the porosity, or 3) a combination of these mechanisms, we added tensile crack component to the original method. In this manner, we have smaller degree of freedom to stabilize the inversion than that of full moment tensor case. In this study we will examine the performance of the method with synthetic tests under various conditions.

キーワード: 誘発地震, 水圧破碎, 震源メカニズム, テンサイルクラック
Keywords: induced seismicity, hydraulic fracturing, focal mechanism, tensile crack

Extraction of body waves from seismic ambient noise Extraction of body waves from seismic ambient noise

Kim Eun mi^{1*} ; KANG Tae seob¹ ; KIM Tae sung² ; KIM Min wook¹
KIM, Eun mi^{1*} ; KANG, Tae seob¹ ; KIM, Tae sung² ; KIM, Min wook¹

¹Pukyong National University, ²Korea Institute of Geoscience and Mineral Resources

¹Pukyong National University, ²Korea Institute of Geoscience and Mineral Resources

Ambient noise cross-correlation is used in seismology to obtain the part of the surface waves and applied to the theoretical researches and various experiments. Obtaining the part of body waves from the ambient noise correlation is difficult to recognize because of the feature decreasing body waves along the travel path. However, the travel times of body waves detected from temporal and spacial events occurrence involve uncertainty of the epicenter and accompany temporal-spacial restriction. On the other hand, ambient noise is always occurred and is obtained at the all stations. So it can be applied to research of the internal earth when the case of extracting the body waves using the cross-correlation is possible. This study shows that body waves can be observed by analyzing the ambient noise recorded seismic data in South Korea. Using 42 broad-band three components stations located on the South Korea. The data removed the mean and trend are filtered high-frequency band(0.5-2Hz). The noise correlations were calculated for all combinations of radial, transverse and vertical components, which required rotation of the horizontal components for each station pair according to the azimuth at each station of the greatcircle between the two stations. Removing the part of broad-band signals effected by occurring event, the part of standard deviations more than three times are removed. And it applied spectral whitening to reduce effects of the surface waves. After data processing, all ambient noise signals are cross-correlated and temporal stacked. We found the signals propagating from one station to another station, this signals can be interpreted as the body waves distinguished surface travel-time in high-frequency band. From this analysis, we can extract the body waves using ambient noise cross correlation of continuous data at the stations.

キーワード: ambient noise, cross correlation

Keywords: ambient noise, cross correlation