

Let it Rain and Snow: Two+ Years of NASA's Global Precipitation Measurement (GPM) Mission Data

*Gail Skofronick Jackson¹

1.NASA Goddard Space Flight Center

Water is fundamental to life on Earth. Knowing where and how much rain and snow fall globally is vital to understanding how weather and climate impact our Earth's water and energy cycles. The Global Precipitation Measurement (GPM) Core Observatory spacecraft, a partnership with the Japanese, launched February 28, 2014. The GPM instruments are designed to extend the capabilities of the Tropical Rainfall Measuring Mission (TRMM, 1997-2015) by providing global and regional three-dimensional measurements of precipitation for scientific investigations and societal benefit. The cornerstone, or anchor, of the GPM mission is the GPM Core Observatory in a unique 65° non-Sun-synchronous orbit at an altitude of 407 km serving as a physics observatory and a calibration reference to improve precipitation measurements by a constellation of 8 or more dedicated and operational, U.S., Japanese and international passive microwave sensors. The non-sun-synchronous orbit allows for highly sophisticated observations of precipitation in the mid-latitudes where a majority of the population lives. GPM's requirements are to measure rain rates from 0.2 to 110 mm/hr and to detect and estimate falling snow. GPM expands the Tropical Rainfall Measuring Mission (TRMM)'s reach in terms of Earth coverage, inter-calibration of constellation member datasets, coordinated formal-partnership merged precipitation data sets, reduced latency for delivering data products, sophisticated satellite instrumentation, simplified data access, expanded global ground validation efforts and integrated user applications. GPM is an international satellite mission to unify and advance precipitation measurements from a constellation of partner satellite sensors to provide next-generation precipitation products everywhere every 3 hours (or less). As a science mission with integrated application goals, GPM will also help to monitor water resources, improve forecasting of extreme weather events that lead to floods, droughts, and landslides.

Since launch, GPM has provided unprecedented views of typhoons, extratropical systems, light rain, snowstorms and extreme precipitation. This NASA presentation will include new imagery and scientific insights resulting from the more than two years of GPM data, an overview of the mission concept and science activities, updates on algorithm status, data products and performance, together with information on international collaborations for radiometer inter-calibration and ground validation.

Keywords: Earth, Precipitation, satellite

GPM/DPR観測による降水特性：TRMM/PR観測との比較

Precipitation characteristics observed with GPM DPR, in comparison with TRMM PR

*高藪 縁¹、濱田 篤¹、横山 千恵¹、小野 茉莉花¹*Yukari Takayabu¹, Atsushi Hamada¹, Chie Yokoyama¹, Marika Ono¹

1. 東京大学 大気海洋研究所

1. Atmosphere and Ocean Research Institute, the University of Tokyo

Improvements in precipitation measurements with the Dual-frequency Precipitation Radar (DPR) on board the Global Precipitation Measurement (GPM) core satellite, compared to the TRMM/PR are three folds: Extension of the observational region from 36N-36S to 65N-65S, an addition of high-sensitivity Ka-band radar to make the dual frequency measurements available, an improvement of the sensitivity of Ku-band radar itself. In this study, observed characteristics of precipitation by the GPM DPR measurements with those by the TRMM PR measurements are compared in various ways. Rainfall events are defined with contiguous rainfall areas observed with the GPM DPR for March 2014 to December 2015. Size and intensity characteristics of rainfall events in the tropical region (30N-30S) and the mid-latitude regions (30N-65N and 30S-65S) are compared. Area-weighted size histogram comparisons reveal that rainfall events over the tropical oceans have two peaks at meso-alpha and at meso-beta scales, while large meso-alpha size dominates over the mid-latitude oceans. Over land, largest frequency is found in the meso-beta size bin in the tropics, while smaller size bins exhibit more frequency in the mid-latitudes. Maximum precipitation intensity histograms normalized for each 4 categories by event size exhibit larger frequency for heaviest precipitation tails for larger size categories in all N-midlat, N-tropics, S-tropics and S-midlat regions, but dependency on event size is larger in the tropics and more frequent heavy precipitation is found with the largest category in the tropics.

Impacts of the radar sensitivity increase are examined (Hamada and Takayabu, 2016), by comparing Ku-band measurements of with two sensitivity thresholds of corrected reflectivity factors; 12 dBZ and 18 dBZ, representing DPR and PR sensitivity, respectively. Increase of sensitivity results in ~21% in frequency and ~2% in rainfall amount between 40N and 40S. It is shown that, in addition, there is a scientifically significant impact by detecting light anvil precipitation in the upper troposphere with increasing sensitivity with the GPM/DPR observations.

キーワード：衛星降水観測、GPM DPR、降水特性

Keywords: Satellite Precipitation Measurements, GPM DPR, Precipitation Characteristics

GPM/DPRの降水検出感度向上のインパクト

Improvements in Detection of Light Precipitation with the Global Precipitation Measurement Dual-Frequency Precipitation Radar (GPM/DPR)

*濱田 篤¹、高藪 縁¹*Atsushi Hamada¹, Yukari N Takayabu¹

1. 東京大学大気海洋研究所

1. Atmosphere and Ocean Research Institute, The University of Tokyo

We demonstrate the impact of the enhancement in detectability by the dual-frequency precipitation radar (DPR) on board the Global Precipitation Measurement (GPM) core observatory. By setting two minimum detectable reflectivities--12 and 18 dBZ--artificially to 6 months of GPM DPR measurements, the precipitation occurrence and volume increase by ~21.1% and ~1.9%, respectively, between 40S and 40N.

GPM DPR is found to be able to detect light precipitation, which mainly consists of two distinct types. One type is shallow precipitation, which is most significant for convective precipitation over eastern parts of subtropical oceans, where deep convection is typically suppressed. The other type is probably associated with lower parts of anvil clouds associated with organized precipitation systems.

While these echoes have lower reflectivities than the official value of the minimum detectable reflectivity, they are found to mostly consist of true precipitation signals, suggesting that the official value may be too conservative for some sort of meteorological analyses. These results are expected to further the understanding of both global energy and water budgets and the diabatic heating distribution.

These results are almost based on Hamada and Takayabu (2016, J. Atmos. Oceanic Technol.), but we will also report the results for other seasons, and results used the next version product (V04), which is scheduled to be released within several months.

キーワード：降水、衛星観測、全球降水観測計画(GPM)

Keywords: precipitation, satellite, Global Precipitation Measurement (GPM)

Current status of the Global Precipitation Measurement (GPM) mission in Japan

Current status of the Global Precipitation Measurement (GPM) mission in Japan

*沖 理子¹、久保田 拓志¹、正木 岳志¹、金子 有紀¹、古川 欣司¹、可知 美佐子¹、高敷 縁²、井口 俊夫³、中村 健治⁴

*Riko Oki¹, Takuji Kubota¹, Takeshi Masaki¹, Yuki Kaneko¹, Kinji Furukawa¹, Misako Kachi¹, Yukari Takayabu², Toshio Iguchi³, Kenji Nakamura⁴

1.宇宙航空研究開発機構、2.東京大学、3.情報通信研究機構、4.獨協大学

1.Japan Aerospace Exploration Agency, 2.University of Tokyo, 3.NICT, 4.Dokkyo University

The Global Precipitation Measurement (GPM) mission is an international collaboration to achieve highly accurate and highly frequent global precipitation observations. The GPM mission consists of the GPM Core Observatory jointly developed by U.S. and Japan and Constellation Satellites that carry microwave radiometers and provided by the GPM partner agencies. The GPM Core Observatory was successfully launched at 3:37 a.m. on February 28, 2014 (JST). The Dual-frequency Precipitation Radar (DPR) was developed by the Japan Aerospace Exploration Agency (JAXA) and the National Institute of Information and Communications Technology (NICT), and installed on the GPM Core Observatory. The GPM Core Observatory chooses a non-sun-synchronous orbit to carry on diurnal cycle observations of rainfall from the Tropical Rainfall Measuring Mission (TRMM) satellite, while the Constellation Satellites, including JAXA's Global Change Observation Mission (GCOM) - Water (GCOM-W) or "SHIZUKU," are launched by each partner agency sometime around 2014 and contribute to expand observation coverage and increase observation frequency. JAXA develops the DPR Level 1 algorithm, and the NASA-JAXA Joint Algorithm Team develops the DPR Level 2 and DPR-GMI combined Level2 algorithms.

JAXA also develops the Global Rainfall Map (GPM-GSMaP) algorithm, which is a latest version of the Global Satellite Mapping of Precipitation (GSMaP), as national product to distribute hourly and 0.1-degree horizontal resolution rainfall map. The GSMaP near-real-time version (GSMaP_NRT) product is available 4-hour after observation through the "JAXA Global Rainfall Watch" web site (<http://sharaku.eorc.jaxa.jp/GSMaP>) since 2008. To assure near-real-time data availability, the GSMaP_NRT system simplified part of the algorithm and its processing procedure. Therefore, the GSMaP_NRT product gives higher priority to data latency than accuracy, and has been used by various users for various purposes, such as rainfall monitoring, flood alert and warning, drought monitoring, crop yield forecast, and agricultural insurance. There are, however, several requirements from users for GSMaP improvements not only for accuracy but also specification. Among those requests for data specification, the most popular ones are shortening of data latency time and higher horizontal resolution. To reduce data latency, JAXA has developed the GSMaP realtime version (GSMaP_NOW) product for observation area of the geostationary satellite Himawari-8 operated by the Japan Meteorological Agency (JMA). GSMaP_NOW product uses satellite data that is available within 0.5-hour, including GMI, AMSR2 direct receiving data, AMSU direct receiving data and Himawari-8, to produce GSMaP at 0.5-hr before. Then, we are applying 0.5-hour forward extrapolation for future direction by cloud motion vector to produce GSMaP at current hour (GSMaP_NOW) over Himawari-8 observed area. GSMaP_NOW product was released to public in November 2, 2015 through the "JAXA Realtime Rainfall Watch" web site (http://sharaku.eorc.jaxa.jp/GSMaP_NOW/).

Moreover, ground validation (GV) activity using a dual Ka-band radar system developed by JAXA has been conducted along the slope of Mt. Zao in Yamagata, Japan from Oct. 2013 to May 2015. During Dec. 2015-Jan. 2016, the single Ka-radar observation was operated on R/V Mirai of the Japan Agency for Marine-Earth Science and Technology (JAMSTEC) over the Indian Ocean aiming at Maritime

precipitation.

After the early calibration and validation of the products and evaluation that all products achieved the release criteria, all GPM standard products and the GPM-GSMaP product has been released to the public since September 2014. The GPM products can be downloaded via the internet through the JAXA G-Portal (<https://www.gportal.jaxa.jp>). All GPM standard products will be reprocessing using the updated algorithms (Version 4) on March-April 2016, and the GPM-GSMaP product will be on July 2016.

キーワード : GPM、DPR、GSMaP、ground validation

Keywords: GPM, DPR, GSMaP, ground validation

Quasi-realtime version of the Global Satellite Mapping of Precipitation (GSMaP_NOW) over the Himawari-8 region

Quasi-realtime version of the Global Satellite Mapping of Precipitation (GSMaP_NOW) over the Himawari-8 region

*久保田 拓志¹、可知 美佐子¹、沖 理子¹

*Takuji Kubota¹, Misako Kachi¹, Riko Oki¹

1.宇宙航空研究開発機構 地球観測研究センター

1.Earth Observation Research Center, Japan Aerospace Exploration Agency

Japan Aerospace Exploration Agency (JAXA) started to distribute the “quasi-realtime” version of the Global Satellite Mapping of Precipitation (GSMaP_NOW) over the Japan Meteorological Agency (JMA) geostationary satellite “Himawari-8” region through the “JAXA Realtime Rainfall Watch” website (http://sharaku.eorc.jaxa.jp/GSMaP_NOW/) since Nov. 2015.

“Realtime availability” of satellite rainfall data is one of major requirements from users. As one of the Japanese products of the the Global Precipitation Measurement (GPM) mission, JAXA has provided the “near-real-time” GSMaP (GSMaP_NRT) product, which is hourly and 0.1-degree grid box global rainfall product combining observation data from microwave and infrared radiometers aboard multiple satellites, four hours after observation through the “JAXA Global Rainfall Watch” website (<http://sharaku.eorc.jaxa.jp/GSMaP/>). Data latency of “four hours” for GSMaP_NRT product was chosen considering balance of satellite data availability and user requirements. To produce GSMaP_NRT, we allocated three hours to collect satellite data and one hour to process data. Users and purposes of GSMaP_NRT data have been increased in number and variety since its release. It is used in, for example, rainfall monitoring, flood alert and warning, drought monitoring, crop yield forecast, and agricultural insurance.

Building on its experience in the GSMaP production, JAXA has developed the GSMaP realtime version (GSMaP_NOW) product to respond user requirements to shorten data latency of “four hour,” and achieved this by providing current rainfall over the geostationary satellite Himawari-8 region. The GSMaP_NOW product uses passive microwave radiometer and geostationary satellite data that is available only within 0.5-hour after observation. At present, we uses data from GPM/GMI, GCOM-W/AMS2 direct broadcasting near Japan, NOAA and MetOp’s AMSU/MHS direct broadcasting, and Himawari-8/AHI to produce GSMaP at 0.5-hour before. In addition, extrapolation of rainfall area with 0.5-hour forward (toward future) by using cloud moving vector calculated from AHI enables us to produce “quasi-realtime” rainfall map over Asian regions. All processing are completed within 0.5-hour, and updated half-hourly.

GSMaP_NOW and other GSMaP products are validated by comparing with with JMA’s gauge-calibrated radar analysis (Radar-AMeDAS) over the Japan in daily and 0.25-degree grid basis. Results showed that accuracy of GSMaP_NOW is almost equivalent or slightly worse than GSMaP_NRT for the period from October 2015 to December 2015.

This quasi-realtime capability will provide possibility to operational users to apply the GSMaP_NOW data in their rainfall monitoring more rapidly, flood alert in smaller basins. Extension of GSMaP_NOW from “Himawari” area to the other geostationary satellites’ observation areas is also under consideration for future improvements.

キーワード：全球降水観測計画、全球降水マップ、リアルタイム

Keywords: GPM, GSMaP, Realtime

将来の宇宙からの降水観測ミッションについて

Future precipitation measuring mission from space

*高橋 暢宏¹、古川 欣司²、可知 美佐子²、村木 祐介²、沖 理子²*Nobuhiro Takahashi¹, Kinji Furukawa², Misako Kachi², Yusuke Muraki², Riko Oki²

1.名古屋大学 宇宙地球環境研究所、2.宇宙航空研究開発機構

1.Institute for Space-Earth Environmental Research, Nagoya University, 2.JAXA

2014年2月の打ち上げ以来、全球降水観測計画（Global Precipitation Measurement: GPM）主衛星搭載の二周波降水レーダ（Dual Frequency Precipitation Radar: DPR）は想定よりも良い性能を示してきている。このGPM/DPRの成功は熱帯降雨観測衛星（Tropical Rainfall Measuring Mission: TRMM）搭載の降雨レーダ

（Precipitation Radar: PR）に続いての成功であり、レーダ技術が成熟していることを意味する。このことから、衛星からの降水観測は新たなステージへ進むことが期待されている。1つには、より社会的な利用を目指した全球降水マップ（例えばGSMaP）の高精度化であり、これにより降水の情報を必要とするほとんどの業務に対しての貢献が可能となる。もう1つには、更なる降水システムの理解である。TRMMの出現により、熱帯地方の降水システムに対する理解が劇的に改善し、GPMではレーダを二周波化することにより雲物理情報を高度化することが可能となった。これは、現在の全球降水の（予測）研究の主力である数値モデルにとって最も必要なパラメータの1つであり、GPMでのモデルへの貢献も期待されている。この観点からは、衛星からのレーダ観測がより感度よく（ほとんど降水と降水に関わる雲を観測できる程度に）、かつ広範囲で（例えば、1度の観測で台風をすっぽり観測できる程度の走査幅で）観測することが望まれている（更にいえば、動的な情報であるドップラー速度観測も）。

レーダ技術の観点から考えると、降水レーダ技術は日本が唯一有しているが、成熟してきていることから、今後はより安価な小型レーダ衛星を開発するのも1つの道である。コストを抑えて様々な国が購入できるようにすることにより国際協力によるレーダのコンステレーションが可能となり、一気にレーダ観測が広がると考える。現在の最新の技術（特に、窒化ガリウム半導体素子を用いた送信アンプと送受信にパルス圧縮技術）を応用することにより、例えばDPRのKu帯レーダ（KuPR）の4分の1の開口面積にした場合でも高度800kmで約20dBZの感度が可能である。ただし、水平解像度は約20kmとなる一方で走査幅800km程度にすることも可能である。この場合、軌道傾斜角を30度以下に設定すると熱帯地域では3-6時間ごとにデータを取得できることになり、ダイレクトにレーダの情報をGSMaPに導入することも可能になる。

一方で科学的な目的を押し進める場合には、DPRに現状の最新の技術を導入することにより、DPRよりも10dBZ程度感度を向上し、走査幅を約2倍にすることがすぐにでも実現可能である。技術的な最終ゴールとしては、静止軌道からの降水レーダによる観測となる。現在のレーダの技術と直径約30mのアンテナを用いることにより、約20dBZの感度でほぼ常時（1時間ごと）に降水システムを観測することが可能となる。ただし、水平分解能は約20kmとなる一方で、ドップラー速度観測が容易になる。このシステムが利用可能となれば、台風の時間変化を的確に捉えることが可能になるなど、防災面での利用や気象予報へのインパクトは大きい。

キーワード：降水観測、人工衛星

Keywords: Precipitation Measurement, Satellite

GCOM-W1 AMSR2 研究プロダクトの開発状況

Development status of the GCOM-W1 AMSR2 research products

*前田 崇¹、関 三恵子²、野牧 知之²、可知 美佐子¹

*Takashi Maeda¹, Mieko Seki², Tomoyuki Nomaki², Misako Kachi¹

1.国立研究開発法人 宇宙航空研究開発機構、2.一般財団法人 リモートセンシング技術センター

1.Japan Aerospace Exploration Agency, 2.Remote Sensing Technology Center of Japan

JAXAは2012年5月に打ち上げられた水循環変動観測衛星GCOM-W搭載マイクロ波放射計2(AMSR2)の運用を行ってきた。このミッションでは8つの地球物理量(積算水蒸気量、雲水量、降水量、海面水温、海上風速、海氷密接度、積雪深、土壌水分)が標準プロダクトとして定義され、これらは2013年5月に一般公開されている。

一方、地表面温度、植生水分量、海氷移動ベクトル、薄氷域検出、高解像度海氷密接度などの将来の標準プロダクト候補としての研究プロダクトが2015年5月に正式に定義された。これに基づき、われわれはAMSR2データから研究プロダクトを生成するためのアルゴリズムの実装を開始し、これまでに初期検証結果を得た。本稿ではGCOM-W AMSR2 研究プロダクトの現状について発表する。

キーワード：水循環監視、マイクロ波放射計、地球観測

Keywords: Watercycle monitoring, Microwave radiometer, Earth observation

気象庁全球数値天気予報システムの台風予測における全天マイクロ波放射輝度同化の影響

Impact of all-sky microwave radiance assimilation on typhoon forecasts in JMA global NWP system

*計盛 正博¹*Masahiro Kazumori¹

1. 気象庁

1. Japan Meteorological Agency

Space-based microwave radiance observations provide essential information for today's numerical weather prediction (NWP). The data contain information on atmospheric water vapor, cloud and precipitation under clear and cloudy conditions. In order to use the information, an all-sky microwave radiance assimilation method for the JMA global data assimilation system has been developed. In the all-sky assimilation, several microwave imagers' radiance data (e.g. AMSR2/GCOM-W, GMI/GPM and SSMIS/DMSP) were evaluated and their first guess (FG) departures (observed radiance minus simulated radiance) were examined. The all-sky FG departure statistics revealed biases originated from cloud physics scheme of the JMA global model. Results of assimilation experiments indicate that there are excessive light rain areas forecasted in the tropics and cloud liquid water amounts are underestimated in stratocumulus areas. These biases in the FG departure are issues in the all-sky radiance assimilation at JMA. Furthermore, the assimilation showed an undesirable impact as a decrease of analyzed mean water vapor amount. However, in spite of these issues, preliminary experiment of the all-sky microwave radiance assimilation showed positive impacts on tropical cyclone track prediction, intensity prediction and made better FG fit to wind and humidity observations. In the tropical cyclone cases, analyzed water vapor fields and forecasted precipitation features became much realistic than those of in clear sky assimilation. Comparisons of the all-sky radiance assimilation and the clear-sky assimilation for several typhoon cases are presented in the conference.

キーワード：数値天気予報、マイクロ波放射輝度、データ同化

Keywords: Numerical Weather Prediction, microwave radiance, data assimilation

NICAM-LETKFを用いた衛星データ同化

Satellite data assimilation using NICAM-LETKF

*寺崎 康児¹、小槻 峻司¹、三好 建正¹*Koji Terasaki¹, Shunji Kotsuki¹, Takemasa Miyoshi¹

1.理化学研究所計算科学研究機構

1.RIKEN Advanced Institute for Computational Science

Data assimilation plays an important role in increasing the accuracy of the numerical weather prediction (NWP). We applied the Local Ensemble Transformed Kalman Filter (LETKF) to the atmospheric general circulation model NICAM (Non-hydrostatic ICosahedral Atmospheric Model). In this study, the conventional observations, satellite microwave radiances from AMSU-A (Advanced Microwave Sounding Unit-A), and satellite-based global precipitation data GSMaP (Global Satellite Mapping of Precipitation) are assimilated. It is difficult to assimilate precipitation observations because of the non-Gaussian error distribution and highly nonlinear precipitation process. Methods are developed to get benefits from these three types of observations. The results indicate that adding more observations makes the analysis more accurate.

キーワード：データ同化、AMSU-A、GSMaP

Keywords: data assimilation, AMSU-A, GSMaP

CloudSatおよびCALIPSOを用いた雲・降水粒子タイプ識別アルゴリズム

On the Algorithm to Discriminate Cloud and Precipitation Particle Type from CloudSat and CALIPSO

*菊池 麻紀¹、岡本 創²、佐藤 可織²、萩原 雄一郎¹*Maki Kikuchi¹, Hajime Okamoto², Kaori Sato², Yuichiro Hagihara¹

1.宇宙航空研究開発機構 地球観測研究センター、2.九州大学 応用力学研究所

1.Japan Aerospace Exploration Agency/Earth Observation Research Center, 2.Kyushu University/Research Institute for Applied Mechanics

Cloud and precipitation take key role in the climate system. Information on the cloud phase, shape, rain and snow (hereafter, hydrometeor particle type) are important factors that determine the radiative properties of cloud and precipitation. The knowledge of the hydrometeor type is also necessary to retrieve their microphysical properties, such as liquid/ice/rain/snow water content and effective radius. In this study, we first derived the hydrometeor particle type for a cloud profiling radar (CPR) onboard CloudSat and Mie-scattering lidar, Cloud-Aerosol Lidar with Orthogonal Polarization (CALIOP), onboard Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observation (CALIPSO), independently. The CloudSat and CALIPSO are in operation since June 2006 and they have accumulated vertical profiles of cloud and precipitation over the globe for ten years. The final synergy hydrometeor particle type was derived by comparing the discrimination results from CloudSat and CALIPSO and registering a type that was most reasonable. The CALIOP algorithm was based on the previous scheme originally developed by Yoshida et al. [2010] and modified by Hirakata et al. [2014]. The CPR algorithm consisted of three main steps: (1) initial type classification by radar reflectivity and European Center for Medium-range Weather Forecasting (ECMWF) temperature; (2) precipitation correction by attenuation corrected surface radar reflectivity; and (3) spatial continuity test. The initial type classification was conducted by selecting a type from a look-up-table of CPR radar reflectivity and ECMWF temperature. The look-up-table was constructed using the cloud particle type discrimination from CALIOP and the precipitation detection by Precipitation Radar (PR) onboard Tropical Rainfall Measuring Mission (TRMM). For each CloudSat bin, an initial type was selected from the look-up-table that corresponded to the observed radar reflectivity and ECMWF temperature. The second step was the precipitation correction. Each profile was determined whether it was a precipitating profile or not by a simple threshold method of attenuation corrected surface radar reflectivity (Haynes et al. [2009]). If the profile was detected as precipitation but the initial classification had been registered as a cloud profile, the initial classification of the lowest hydrometeor classification was corrected to precipitation (and visa-versa). The last step of the CPR algorithm was the spatial continuity test to eliminate spike misclassification. The final CPR-CALIOP synergy scheme classified the hydrometeor particles into 7 types: warm water, supercooled water, randomly oriented ice crystals (3D-ice), horizontally oriented plates (2D-plate), mixture of 3D-ice and 2D-plate, rain and snow. Taking the advantage of CPR's capability to penetrate cloud and light precipitation and CALIOP's capability to detect thin clouds, the synergy algorithm derived the global vertically resolved distribution of hydrometeor particle types from thin cirrus clouds to light precipitation.

The hydrometeor particle type algorithm is considered to be applied in upcoming Earth Clouds, Aerosols and Radiation Explorer (EarthCARE) Level 2 Standard Products that will be processed and released from JAXA to observe global and vertical distribution of the hydrometeor particle types.

キーワード：雲レーダ、ライダ、衛星、雲観測、降水観測

Keywords: cloud radar, lidar, satellite, cloud observation, precipitation observation

マルチセンサー衛星観測の複合利用による雲プロセスの定量化と気候モデル診断

Synergistic use of multisensor satellite observations for quantification of cloud processes and climate model diagnostics

*鈴木 健太郎¹*Suzuki Kentaroh¹

1. 東京大学大気海洋研究所

1. Atmosphere and Ocean Research Institute, University of Tokyo

It is now recognized that key questions in climate sciences cannot be addressed with a single satellite observation alone. This recognition is an underlying motivation for emerging/existing multisensor satellite observations. One particular area of research to be advanced with such multisensor satellite observations is a characterization of physical processes in climate system, which still is a fundamental uncertainty in climate modeling. Cloud processes, among others, are one of the most uncertain components in state-of-the-art climate models and therefore are a particular target of studies that should be conducted with a synergistic use of multisensor satellite observations. In this presentation, I highlight our recent progress in combining multiple NASA satellites to obtain novel insight into cloud processes, which also has enabled a new "process-oriented" type of climate model diagnostics. In particular, we have developed methodologies for combining simultaneous measurements of cloud and precipitation provided by CloudSat and Aqua/MODIS. The methodologies exploit the unique measurement capability of the two sensors to construct the particular statistics that "fingerprint" the particle growth processes in warm clouds. Our recent investigation for land-ocean differences found in the statistics is also discussed in this presentation to identify a key role of updraft velocity in the warm rain formation. This points to a necessity for measuring updraft velocity from space in our future satellite mission. The observation-based statistics also serve as a reference for evaluating climate models in their representations of fundamental cloud processes. The methodologies developed have indeed been applied to a hierarchy of models, including global climate models and global/regional cloud-resolving models, to identify their key biases in representations of fundamental microphysical processes. Such a new process-based model constraint has also been contrasted against a traditional "performance-oriented" model evaluation based on historical trends of global mean temperature to expose their apparent dichotomy. This implies the presence of compensating errors at a fundamental process level in current climate models and underscores the necessity of further efforts for "process-oriented" model diagnostics with a synergistic use of upcoming multiple satellite observations.

衛星観測による雲の鉛直構造と放射収支の研究

Vertical profile of cloud and radiation budget observed by satellite

*早坂 忠裕¹、三井 文乃¹、高橋 直也¹*Tadahiro Hayasaka¹, Ayano Mitsui¹, Naoya Takahashi¹

1.東北大学大学院理学研究科

1.Graduate School of Science, Tohoku University

Vertical profile of cloud is obtained from space-borne active sensors such as CPR/CloudSat and CALIOP/CALIPSO. We used three CloudSat products, 2B-GEOPROF-LIDAR, 2B-TAU, and 2B-FLXHR-LIDAR to reveal spatial and seasonal properties of clouds. Cloud vertical profiles are classified into 10 types referred to ISCCP. Obtained cloud profiles are discussed with meteorological and sea surface conditions such as wind, water vapor surface air temperature and sea surface temperature. The results show that a combination of low-cloud and high-cloud is frequently observed in tropical and mid-latitude regions and these clouds are formed according to different mechanisms. It is also shown that overlapping of cloud affect longwave radiation budget at the top of the atmosphere. Overlying cloud decreases the cooling rate at the uppermost layer of low-cloud, and it affect the formation and dissipation of low-cloud. In the analysis of three data products, some inconsistency was found, which was attributed to unsuccessful retrieval of cloud water content and effective radius of cloud particle. Therefore, it is noted that quantitative evaluation of the product is critical to application of these cloud data to radiation and climate change studies.

キーワード：雲、放射、衛星観測

Keywords: cloud, radiation, satellite

Global Distribution of Vertical Wavenumber Spectra in The Lower Stratosphere Observed Using High-Vertical-Resolution Temperature Profiles from COSMIC GPS Radio Occultation

*Noersomadi Noersomadi¹, Toshitaka Tsuda²

1. Graduate Student of Graduate School of Science, Kyoto University, 2. Research Institute for Sustainable Humanosphere (RISH), Kyoto University

We retrieved temperature (T) profiles with a high vertical resolution using the full spectrum inversion (FSI) method from the Constellation Observing System for Meteorology, Ionosphere and Climate (COSMIC) GPS radio occultation (GPS-RO) data from January 2007 to December 2009. We studied the characteristics of temperature perturbations in the stratosphere at 20–27 km altitude. This height range does not include a sharp jump in the background Brunt-Vaisala frequency squared (N^2) near the tropopause, and it was reasonably stable regardless of season and latitude. We analyzed the vertical wavenumber spectra of gravity waves (GWs) with vertical wavelengths ranging from 0.5 to 3.5 km, and we integrated the (total) potential energy E_p^T . Another integration of the spectra from 0.5 to 1.75 km was defined as E_p^S for short vertical wavelength GWs, which was not studied with the conventional geometrical optics (GO) retrievals. We also estimated the logarithmic spectral slope (p) for the saturated portion of spectra with a linear regression fitting from 0.5 to 1.75 km.

Latitude and time variations in the spectral parameters were investigated in two longitudinal regions: (a) 90–150° E, where the topography was more complicated, and (b) 170–230° E, which is dominated by oceans. We compared E_p^T , E_p^S , and p , with the mean zonal winds (U) and outgoing longwave radiation (OLR). We also show a ratio of E_p^S to E_p^T and discuss the generation source of E_p^S . E_p^T and p clearly showed an annual cycle, with their maximum values in winter at 30–50° N in region (a), and 50–70° N in region (b), which was related to the topography. At 30–50° N in region (b), E_p^T and p exhibited some irregular variations in addition to an annual cycle. In the Southern Hemisphere, we also found an annual oscillation in E_p^T and p , but it showed a time lag of about 2 months relative to U . Characteristics of E_p^T and p in the tropical region seem to be related to convective activity. The ratio of E_p^T to the theoretical model value, assuming saturated GWs, became larger in the equatorial region and over mountainous regions.

JAXAひまわりモニタの概要と状況

Overview and status of the JAXA Himawari Monitor

*可知 美佐子¹、菊池 麻紀¹、栗原 幸雄¹、永尾 隆¹、村上 浩¹*Misako Kachi¹, Maki Kikuchi¹, Yukio Kurihara¹, Takashi Nagao¹, Hiroshi Murakami¹

1.宇宙航空研究開発機構 地球観測研究センター

1.Earth Observation Research Center, Japan Aerospace Exploration Agency

In October 2014, new geostationary meteorological satellite "Himawari-8" operated by the Japan Meteorological Agency (JMA) was launched from the JAXA Tanegashima Space Center. Himawari-8 has started its operation at 02 UTC on 7 July 2015, replacing the geostationary meteorological satellite "MTSAT-2". Since there are many commonalities and synergies between the Himawari-8 and JAXA's upcoming Earth observation satellites, such as the Global Change Observation Mission -Climate (GCOM-C) to be launched in Japanese Fiscal Year (JFY) of 2016, Greenhouse gasses Observing SATellite-2 (GOSAT-2), and EarthCARE mission to be launched in JFY2017, JAXA cooperates with JMA in algorithm development, calibration and validation activities on the Himawari-8 satellite. JAXA also exchanged agreements with JMA to promote the Himawari-8 data in research and education community. To this purpose, we received the Himawari data from JMA in near-real-time basis, and distribute its images and data through the JAXA Himawari Monitor (<http://www.eorc.jaxa.jp/ptree/>). We developed algorithms, which will be consistent with those for the GCOM-C, GOSAT-2 and EarthCARE missions, to retrieve geophysical parameters from the Himawari-8 data with collaboration of external institutions. As of February 2016, aerosol properties and sea surface temperature (SST) products are provided through the JAXA Himawari Monitor along with the Himawari Standard Data provided by JMA. The Himawari geophysical parameters are produced in NetCDF4 format and provided to registered users by FTP in near-real-time basis. Currently, we are developing new geophysical parameters to be distributed through the system. Ocean color (suspended substances and chlorophyll-a), Photosynthetic Active Radiation (PAR), and cloud properties (cloud top temperature, optical thickness, and effective particle radius) data are planned to release to public in 2016.

キーワード：ひまわり8号、海面水温、エアロゾル特性、海色、雲特性

Keywords: Himawari-8, Sea surface temperature, aerosol property, ocean color, cloud property

サブピクセル雲水平不均質性がマルチスペクトルイメージャでの雲特性パラメータ推定に与える影響
Investigating impact of subpixel horizontal inhomogeneity on retrieval of cloud
microphysical parameters from multi-spectral imagers

*永尾 隆¹、中島 孝²、Letu Husi³、村上 浩¹

*Takashi M. Nagao¹, Takashi Y. Nakajima², Husi Letu³, Hiroshi Murakami¹

1.宇宙航空研究開発機構地球観測研究センター、2.東海大学情報技術センター、3.中国科学院

1.Earth Observation Research Center, Japan Aerospace Exploration Agency, 2.Tokai University
Research and Information Center, 3.Institute of Remote Sensing and Digital Earth, Chinese Academy
of Sciences

The importance of cloud in terrestrial atmospheric dynamics and radiative transfer as key elements of the water and energy cycles have motivated development of various remote sensing technics for monitoring cloud microphysical parameters by using satellite-borne multispectral imagers (e.g. MODIS/Aqua). We have been developed a cloud retrieval algorithm for the Second Generation Global Imager (SGLI) onboard a new earth observation satellite, the Global Change Observation Mission-Climate (GCOM-C), that Japanese Aerospace Exploration Agency (JAXA) is scheduling to launch in Japan fiscal year 2016. The SGLI instrument is a radiometer providing near-ultraviolet-to-thermal-infrared multi-spectral measurements at 250 m, 500 m or 1 km resolutions. The algorithm can retrieve cloud optical thickness (COT), cloud particle effective radius (CER), and cloud top temperature (CTT) simultaneously from visible and infrared measurements at three spectral bands of the SGLI. And then, we are also working on applying our algorithm to the measurements from the Advanced Himawari Imager (AHI) onboard the Japan Meteorological Agency's geostationary meteorological satellite, Himawari-8. The AHI is also a radiometer providing visible-to-thermal-infrared multi-spectral measurements of every 2.5 minutes for Japan area and 10 minutes for full disk at 500 m, 1 km or 2 km resolutions. Therefore, retrievals of cloud parameters derived from both SGLI's global high-resolution observations and AHI's high-frequency observation will be obtained. However, there may be discrepancies between retrievals from the SGLI and AHI. As pointed out by previous studies, cloud retrievals are impacted significantly by vertical and horizontal distribution of cloud properties. And the impact on retrievals depends on the spectral characteristics, the spatial resolution and the observation angles of the instruments. This study focuses on bias in cloud retrievals caused by both horizontal inhomogeneous cloud properties and clear-region-contamination at subpixel scale. First, we introduce our cloud retrieval algorithm for the SGLI and show the comparison of cloud retrievals obtained by applying our algorithm to the MODIS's (instead of SGLI's) 1 km resolution observations and the AHI's 2 km resolution observations. Second, we simulate biases in COT, CER and CTT retrievals for various spatial resolution observations including SGLI's and AHI's observations by using high-spatial resolution (30 m) measurements of the Landsat-8. The simulation result explains the relationship between cloud horizontal inhomogeneity and clear-region-contamination and retrieval bias, and also suggests that the bias can be estimated by using co-variance matrix of multi-spectral radiances within the target pixel. Finally, the possibility of estimating the bias from SGLI's and AHI's observation themselves is discussed.

キーワード：GCOM-C、ひまわり8号、雲特性

Keywords: GCOM-C, Himawari-8, Cloud property

MODISとひまわり8衛星データを用いたVoronoi結晶散乱モデルによる氷雲微物理パラメータのリトリバルについて

Retrieval of the ice cloud properties from MODIS and HIMAWARI-8 satellite measurements by Voronoi ice particle scattering model

*Letu Husi^{1,2}、Nagao Takashi³、Ishimoto Hiroshi⁴、Nakajima Takashi²、Jerome Riedi⁵、Shang Huazhe¹、Chen Liangfu¹

*Husi Letu^{1,2}、Takashi M. Nagao³、Hiroshi Ishimoto⁴、Takashi Y. Nakajima²、Riedi Jerome⁵、Huazhe Shang¹、Liangfu Chen¹

1.Institute of Remote Sensing and Digital Earth, Chinese Academy of Sciences (CAS), China、2.Research and Information Center (TRIC), Tokai University, Japan、3.Earth Observation Research Center (EORC), JAXA, Japan、4.Meteorological Research Institute, Japan、5.5 Laboratoire d'Optique Atmosphérique, Université de Lille, France

1.Institute of Remote Sensing and Digital Earth, Chinese Academy of Sciences (CAS), China、2.Research and Information Center (TRIC), Tokai University, Japan、3.Earth Observation Research Center (EORC), JAXA, Japan、4.Meteorological Research Institute, Japan、5.5 Laboratoire d'Optique Atmosphérique, Université de Lille, France

Ice clouds play an important role in the radiation balance of the Earth's atmospheric system through interaction with solar radiation and infrared emission. However, there are still large uncertainties in characterizing their microphysical and optical properties, due to their complex habit. In this study, single scattering property of the aggregated ice cloud particle called Voronoi habit model is developed for applying in the ice cloud radiative transfer simulations and retrieval of their optical and microphysical properties. A combination of the finite-difference time-domain (FDTD) method, Geometric Optics Integral Equation (GOIE) technique, and geometric optics method (GOM) are applied to compute the single scattering properties of the Voronoi model. The POLDER multi-angles measurements are employed to evaluate the efficiency of the Voronoi model on retrieval of the ice cloud properties. The CAPCOM cloud property retrieval algorithm is improved to retrieve the ice cloud properties for MODIS and HIMAWARI-8 satellite measurements based on the Voronoi model. Optical thickness and effective particle radius of the ice clouds are retrieved from Aqua/MODIS data using the CAPCOM and Voronoi models. The inversion results by Voronoi model and the CAPCOM algorithm are compared to MODIS collections-6 ice cloud products for investigating the retrieval results by the Voronoi models. Ice cloud properties are also retrieved from the HIMAWARI-8 satellite data. In this presentation, we will also introduce the some results of the ice cloud retrievals by Voronoi model and characteristics of the ice cloud properties in Asia-Pacific region.

キーワード：氷雲、粒子散乱特性、微物理特性

Keywords: Ice cloud, Particle scattering property, Microphysical property

Variations of Ocean Vortex Train of Green Island from Satellite Imagery

*PoChun Hsu¹, ChenChih Lin¹, ChungRu Ho¹

1.Department of Marine Environmental Informatics, National Taiwan Ocean University, Keelung, Taiwan

Kuroshio, a western boundary current, flows quickly and steadily along the east coast of Taiwan. The ocean vortex train induced by the Kuroshio on the leeside of Green Island, which is a small islet at the path of Kuroshio off southeast Taiwan, is investigated in this study. The horizontal scale and characteristics of the ocean vortex train are analyzed with five kinds of satellite imagery, including optical imagery from SPOT (Satellite Pour l'Observation de la Terre) and Formosat-2 satellites, as well as synthetic aperture radar imagery from ERS-2 (European remote sensing satellite), ALOS (Advanced Land Observing Satellite), and Sentinel-1. Satellite altimetry data and moored acoustic Doppler current profiler (ADCP) are used to calculate the velocity of Kuroshio. The ADCP data show that the velocity is enhanced on the left of the vortex train when it is formed on the leeside of Green Island. The data derived from MODIS (Moderate-resolution Imaging Spectro-radiometer) also show that the sea surface temperature of recirculation water is more than 2°C colder and the chlorophyll-a concentration is two times higher than the surrounding waters. Wind forcing may affect the vortex train obviously. The averaged aspect ratio and dimensionless width of vortex train derived from available satellite images are 2.09 and 2.02, respectively for the cases of southerly, and are 1.91 and 2.76, respectively for the cases of northerly.

Keywords: Kuroshio, Green Island, vortex train, satellite imagery

新規海色リモートセンシングプロダクトの開発

Development of new satellite ocean colour products: moving forward to an estimation of phytoplankton photo-physiology

*平田 貴文¹、鈴木 光次¹

*Takafumi Hirata¹, Koji Suzuki¹

1.北海道大学地球環境科学研究所

1.Faculty of Environmental Earth Science, Hokkaido University

Since the launch of the Coastal Zone Color Scanner (CZCS) in the 1970s, ocean color remote sensors have been providing synoptic views of marine biological (and biogeochemical) activities via surface chlorophyll-a observation. The ocean colour algorithms, in addition to ocean colour sensors, also evolved since the CZCS, and the remote sensing data of various biogeochemical variables have become available (e.g. particulate organic carbon, calcite concentration, chromophoric dissolved organic matter etc.). While availability of the biogeochemical products from the ocean color remote sensing is continuously growing, it is only the fluorescence line height due to phytoplankton that became available as a biological product after chlorophyll-a. Here we challenge to develop a new satellite algorithm to retrieve more biological variables using the ocean colour remote sensing. We found in theory that some physiological quantities of various phytoplankton groups such as the chlorophyll-a specific-absorption coefficient and the quantum yield of photosynthesis can be retrieved by integrating a bio-optical theory and an image processing technique. When these biological products were actually derived using the satellite ocean colour data, our analyses revealed that primary productivity of some phytoplankton groups could be largely influenced by their physiology rather than their biomass. This implies the importance of physiological observation of phytoplankton for a better understanding of ocean biogeochemical processes and ecology.

キーワード：海色リモートセンシング、植物プランクトン、光生理

Keywords: ocean color remote sensing, phytoplankton, photo-physiology

現場光学観測データを用いたGCOM-Cクロロフィルa濃度プロダクトの改善

Improvement of GCOM-C chlorophyll-a concentration product by in-situ optical measurements

*村上 浩¹、清本 容子²、佐々木 宏明²*Hiroshi Murakami¹, Yoko Kiyomoto², Hiroaki Sasaki²

1.宇宙航空研究開発機構地球観測研究センター、2.水産総合研究センター西海区水産研究所

1.Earth Observation Research Center, Japan Aerospace Exploration Agency, 2.Seikai National Fisheries Research Institute, Fisheries Research Agency

Global Change Observation Mission for Climate (GCOM-C) which carries Second-generation Global Imager (SGLI) is planned to be launched in Japanese Fiscal Year (JFY) 2016 (from April 2016 to March 2017). SGLI has middle spatial resolution (250 m to 1000 m), wide swath (1150 km to 1400 km), 19 bands from near-UV (380 nm) to thermal infrared (12 μ m) wavelengths, and two-channel (red and near infrared) slant view polarization observations. SGLI will provide several ocean color products including normalized water-leaving radiance (*NWLR*) (or remote sensing reflectance (R_{rs})), photosynthetically available radiation (*PAR*), chlorophyll-a concentration (*Chla*), colored dissolved organic matter (*CDOM*), total suspended matter concentration (*TSM*), which will contribute to coastal environment monitoring and climate researches by the SGLI 250m resolution and wide swath. *Chla* is a key parameter to know phytoplankton distribution and the ocean primary production. Traditionally, it was estimated by an empirical regression between *Chla* and blue/green ratio of R_{rs} (e.g., OC4 algorithm (O'Reilly et al., 2000)). The regression is basing on a global in-situ dataset (e.g., NASA bio-Optical Marine Algorithm Data set, NOMAD (Werdell and Bailey, 2005)). However, the relationship can be deviated due to anomalous condition of inherent optical properties (IOPs), phytoplankton absorption, a_{ph} , CDOM + detritus absorption, a_{dg} , and particle back-scattering, b_{bp} , especially in the coastal areas.

This study showed improvement of the *Chla* estimation by considering the IOP deviation through a simple IOP models (Gordon et al., 1988 and Lee et al., 2002). We tested the scheme for in-situ R_{rs} and *Chla* data observed by Seikai National Fisheries Research Institute (SNFRI) in the East China Sea, which is independent of the NOMAD dataset. Firstly, we calculated $Chla^{1st}$ by the traditional OC4 algorithm and a_{ph} by the linear matrix inversion scheme (Hoge and Lyon, 1996, 1999) from the observed R_{rs} . Then, R_{rs} is modified by the IOP model with the estimated a_{ph} , which is assumed to be strongly related to *Chla*, and average state of a_{dg} and b_{bp} at condition of the *Chla* value. The average state of a_{dg} and b_{bp} was modeled by regression with *Chla* basing on the NOMAD dataset in advance. Finally we recalculated $Chla^{re}$ by the OC4 algorithm applied to the modified R_{rs} . Mean absolute difference (MAD) compared to the in-situ observed *Chla* was improved from 50% ($Chla^{1st}$) to 40% ($Chla^{re}$).

This scheme assumed spectral shape of a_{ph} , a_{dg} and b_{bp} , however they can change in various coastal environment. Collection of the in-situ bio-optical measurements in the various coastal areas is required to develop more robust GCOM-C algorithms and methodology to estimate coastal *Chla*.

キーワード：GCOM、GCOM-C、SGLI、海色、クロロフィルa濃度

Keywords: GCOM, GCOM-C, SGLI, ocean color, chlorophyll-a concentration

Application of Bio-Optical Model and Satellite Image in Identification and Mapping of Submerged Macrophytes in South-Basin of Lake Biwa, Japan

*Shweta Yadav¹, Yosuke Yamashiki¹, Minoru Yoneda¹, Tamura Masayuki¹, Suzaki Junichi¹, Kanako Ishikawa²

1.Kyoto University, 2.Lake Biwa Environmental Research Institute (LBERI)

Abstract

Aquatic macrophytes are important for primary production and environmental protection of marine and fresh water ecosystems. However excessive growth of macrophytes may cause an adverse shift in shallow lakes from clear-water plant-dominated states to turbid algae-dominated state. In order to effectively manage the inland waters and their ecosystem, it is crucial to monitor the community structure and distribution of aquatic macrophytes.

Present study focus on identifying and mapping the submerged macrophyte species dominated in eutrophic south basin of Lake Biwa, using satellite image (Landsat) and bio-optical model. Spectral signature of various submerged macrophytes were generated. Laboratory experiments were conducted to identify the reflectance spectra of the macrophytes at different wavelength, using FieldSpec Spectroradiometer. Result indicates that visible (450-670 nm) and near-infrared (850-880 nm) bands are the significant for spectral discrimination of submerged macrophytes. Image processing software Erdas-Imagine-2013 was used to map the macrophytes species.

Keywords: Remote Sensing, Bio-Optical Model, Submerged Macrophytes, Mapping

衛星データより北方林における下層と上層葉面積指数の推定する研究

Satellite Retrieval of Overstory and Understory Leaf Area Index in High Northern Forests

*楊 偉¹、小林 秀樹²、奈佐原 顕郎³*Wei Yang¹, Hideki Kobayashi², Kenlo Nishida Nasahara³

1.千葉大学 環境リモートセンシング研究センター、2.海洋研究開発機構、3.筑波大学

1.Center for Environmental Remote Sensing, Chiba University, 2.Japan Agency for Marine-Earth Science and Technology, 3.University of Tsukuba

Leaf area index (LAI), defined as one-half the total green leaf area per unit of horizontal ground surface area, is a crucial input parameter for global carbon cycle modeling. Since carbon fixed through net primary productivity has different residence times for different components, the LAI for overstory and understory vegetation in forest ecosystems need to be treated differently in carbon cycle modeling. Currently, satellite remote sensing is the only feasible technique to measure the LAI at a continental and/or global scale over a long periods of multiple years. However, there are no existing satellite products that provide simultaneous estimation of overstory and understory leaf area index (LAIo and LAIu) at present. Consequently, we proposed an integrating look-up table (LUT) method to remotely estimate the LAIo and LAIu for boreal forests, where are encountering rapid temperature change than other areas. In the newly proposed method, the understory normalized vegetation difference index (NDVIu) is first retrieved from multiple satellite observations by using a semi-empirical method. Then the LAIu is estimated from the retrieved NDVIu through searching a LUT generated by radiative transfer simulation for understory vegetation. In order to estimate the LAIo, a new land-cover map of forest types, which classifies the boreal forests as low, medium and high types, is generated by using a wall-to-wall canopy height product to replace the conventional global land-cover maps. The LUTs containing angles, LAIu, LAIo, and corresponding reflectance at red and near-infrared bands are generated for each forest type by running a radiative transfer model. Specifically, the forest landscape parameters are determined by an empirical forest structure model. Moreover, the retrieved NDVIu is used as an ancillary information to constrain the relationship between LAIo and canopy reflectance. The validation results showed acceptable accuracy based on our field measurement at interior Alaska, America.

キーワード：衛星リモートセンシング、葉面積指数、北方林

Keywords: Satellite Remote Sensing, Leaf Area Index, Northern Forests

国際宇宙ステーションからのハイパースペクトル撮像：Hyperspectral Imager Suite (HISUI)
Hyperspectral Imaging from International Space Station : Hyperspectral Imager Suite
(HISUI)

*松永 恒雄¹、山本 聡¹、酒井 徹¹、岩崎 晃²、土田 聡³、岩男 弘毅³、谷井 純⁴、鹿志村 修⁴、山本 浩万³、毛利 浩一郎⁴、立川 哲史⁴

*Tsuneo Matsunaga¹, Satoru Yamamoto¹, Toru Sakai¹, Akira Iwasaki², Satoshi Tsuchida³, Koki Iwao³, Jun Tani⁴, Osamu Kashimura⁴, Hirokazu Yamamoto³, Koichiro Mouri⁴, Tetsushi Tachikawa⁴

1.国立環境研究所、2.東京大学、3.産業技術総合研究所、4.宇宙システム開発利用推進機構

1.National Institute for Environmental Studies, 2.The University of Tokyo, 3.National Institute of Advanced Industrial Science and Technology, 4.Japan Space Systems

Hyperspectral Imager Suite (HISUI) is a spaceborne imaging spectrometer being developed by Ministry of Economy, Trade, and Industry (METI) of Japan for the deployment on International Space Station (ISS) Japan Experiment Module (JEM) in FY2018. It will be METI's fourth spaceborne optical imaging system after JERS-1 OPS (1992 -1998), ASTER (1999 -), and ASNARO-1 (2014 -). HISUI has one reflective telescope, two grating spectrometers, two area detectors, and a mechanical cooler, and covers 0.4 - 2.5 μm spectral region with 185 spectral bands, 20 m (cross track) x 30 m (along track) spatial resolution, and 20 km swath, from the altitude of 400 km. The basic specifications of HISUI are summarized in Table 1.

HISUI project is currently being promoted by three organizations each of which has a contract with METI : Japan Space Systems, NEC Corporation, and National Institute of Advanced Industrial Science and Technology (AIST). In addition, several scientists from universities and national research institutes are participating in the HISUI project.

The planned operation of HISUI onboard ISS will be three years from 2019. In this time period, ISS will have several advanced earth observing instruments such as a vegetation lidar (Global Ecosystem Dynamics Investigation, GEDI), a thermal camera for terrestrial vegetation (ECOSystem Spaceborne Thermal Radiometer Experiment on Space Station, ECOSTRESS) and a carbon dioxide sensor (Orbital Carbon Observatory 3, OCO-3). Synergy among these instruments will provide us new information on terrestrial ecosystem which cannot be obtained from individual observations by these instruments. Especially, simultaneous observation by GEDI and HISUI will enable combined analysis of biomass amount data from a lidar and physiological parameters of vegetation from an imaging spectrometer.

Table 1. HISUI Specifications.

Spatial resolution	20 m (CT) x 30 m(AT)
Swath	20 km
Spectral coverage	0.4 - 2.5 μm
Spectral resolution	10 nm (VNIR) 12.5 nm (SWIR)
Number of band	185
Signal to noise ratio	>450 @ 620 nm >300 @ 2100 nm
MTF	> 0.2
Dynamic range	12 bits
Data compression	Lossless (70%)
Pointing capability	$\approx \pm 5^\circ$ (± 35 km)
Data rate (70 % compression)	0.4 Gbps
Maximum data amount per day	690 Gbyte

The altitude of ISS is assumed to be 400 km.

GOSAT及びGOSAT-2の状況

The current status of GOSAT and GOSAT-2

*松永 恒雄¹、横田 達也¹、中島 正勝²、井上 元、今須 良一³

*Tsuneo Matsunaga¹, Tatsuya Yokota¹, Masakatsu Nakajima², Gen Inoue, Ryoichi Imasu³

1.国立環境研究所、2.宇宙航空研究開発機構、3.東京大学

1.National Institute for Environmental Studies, 2.Japan Aerospace Exploration Agency, 3.The University of Tokyo

Greenhouse Gases Observing Satellite (GOSAT) and its successor, GOSAT-2, are Japanese earth observing satellites for greenhouse gases measurements from space. Both satellite projects are joint efforts among Ministry of the Environment (MOE), Japan Aerospace Exploration Agency (JAXA), and National Institute for Environmental Studies (NIES).

GOSAT was launched in January 2009, already finished its design lifetime (five years), and is currently in its extended operation period. Its data have been used to calculate whole-atmosphere monthly mean carbon dioxide concentration and to identify locations with large anthropogenic emissions of CO₂ and methane.

GOSAT-2 will be launched in FY2017. Both satellites have Fourier transform spectrometers for the measurements of columnar abundances of greenhouse and other gases and UV-VIS-NIR-SWIR imagers for cloud and aerosol detection. GOSAT-2 instruments (FTS-2 and CAI-2) will be modified or improved based on the experiences of GOSAT instruments (FTS and CAI). FTS-2 will have the extended spectral coverage for carbon monoxide measurement and the intelligent pointing capability to avoid cloud contamination. CAI-2 will have multiple UV bands for more precise land aerosol monitoring and forward/backward viewing capability to avoid sun glint over oceans. Most of critical design reviews of GOSAT-2 spacecraft, earth observing instruments, and ground systems have been completed.

Synergistic observations using a wide spectral-coverage FTS and an agile pointing mechanism onboard GOSAT

Synergistic observations using a wide spectral-coverage FTS and an agile pointing mechanism onboard GOSAT

*久世 暁彦¹、須藤 洋志¹、塩見 慶¹、片岡 文恵²、吉田 純³

*Akihiko Kuze¹, Hiroshi Suto¹, Kei Shiomi¹, Fumie Kataoka², Jun Yoshida³

1.宇宙航空研究開発機構、2.リモートセンシング技術センター、3.日本電気株式会社


1.Japan Aerospace Exploration Agency, 2.Remote Sensing Technology Center of Japan, 3.NEC cooperation

Since February 2009, Thermal And Near infrared Sensor for carbon Observation Fourier-Transform Spectrometer (TANSO-FTS) onboard the Greenhouse gases Observing SATellite (GOSAT) has been providing long-term high-resolution radiance spectra of and uniform quality. Among the satellite-borne spectrometers for greenhouse gases (GHG) observations, only GOSAT uses FTS technology to acquire high-resolution spectra. With the FTS multiplex advantage, the single spectrometer with a common field of view can simultaneously cover both two linear polarization of the solar scattered light and thermal emission from the earth's surface and atmosphere. After seven years of operation, most of the level 2 products have still been retrieved only from the scalar solar scattered light spectra. However, there is a strong need to acquire information for at least two vertical-layers (upper and lower atmosphere) to understand GHG dynamics. Theoretically, vertical profiles can be retrieved from thermal infrared spectra using the Levenberg-Marquardt method. The algorithm assumes that the measurements and a priori errors are random; however, actually measured radiance spectra and the forward model show calibration errors and systematic biases, respectively. In addition, in the existing retrievals, many parameter need to be retrieved simultaneously. These errors make retrievals unstable. Therefore, the parameters to be assumed and retrieved need to be reconsidered.

The modification of the light path by the scattering induced by thin clouds and aerosol scatterings, which are highly polarized, is still the largest source of errors and information on their vertical location can minimize the errors in GHG retrievals. The measured light is a combination of surface reflection and scattering by clouds and aerosols, which have different phase functions. Polarization measurement of O₂ A band spectra has potential height information. The TANSO-FTS instrument has a ZnSe non-coated beam with an incident angle of 45deg and a large polarization sensitivity. The analysis using vector radiative transfer calculation and an instrument Muller matrix becomes complicated. The polarization of the spectra shows strong dependency on the geometry of the sun, the target object and the satellite. A unique function of TANSO-FTS is agile targeting; the two axes mechanism helps target and view a point source from different geometries by uploading the pointing angle and location tables on a daily basis. In this study, a simpler but robust algorithm is proposed by minimizing the number of parameters to be retrieved, and optimizing sampling pattern and viewing geometry to minimize the highly geometry-dependent polarization related errors.

キーワード：いぶき、温室効果ガス観測センサ、フーリエ干渉計、熱赤外、偏光、鉛直分布

Keywords: GOSAT , TANSO-FTS, FTS, thermal infrared, polarization, vertical profile

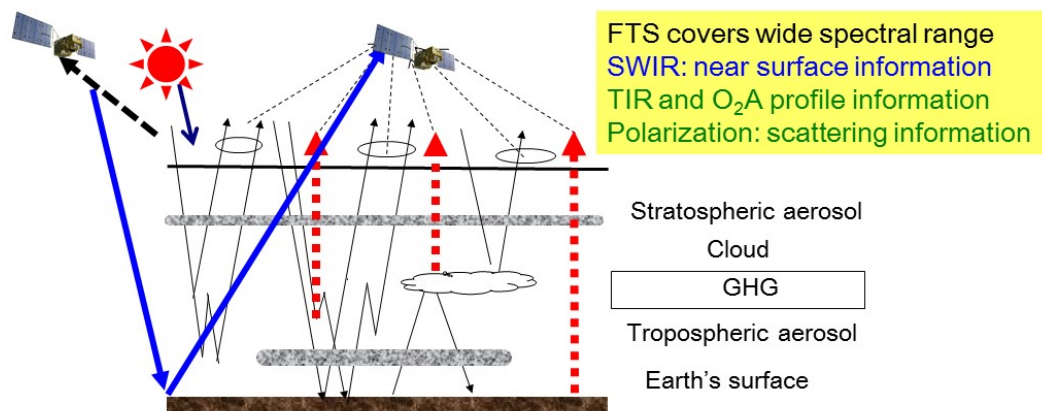

High spectral resolution data of

- (1) Solar lines (Fraunhofer lines, Fluorescence)
- (2) Earth albedo (reflectance and scattering)
- (3) Thermal radiation
- (4) Two linear polarizations

GSMaP Gauge NRTの検証

Validation of the GSmAP Gauge NRT

*妻鹿 友昭¹、牛尾 知雄¹*Tomoaki Mega¹, Tomoo Ushio¹

1.大阪大学大学院 工学研究科

1.Graduate School of Engineering, Osaka University

Information of real time precipitation is important for water disaster management. However real-time observation does not cover the whole world. Satellite observes global precipitation, although a satellite observation is limited overpass time. Global Satellite Mapping of Precipitation (GSMaP) is hourly rainfall map using combined passive microwave and infrared radiometric data from multi satellite. GSmAP in near-real-time (NRT) is providing data 4-hour after observation. Precipitation retrieval from the passive microwave radiometer underestimate over land. Gauge adjusted GSmAP (GSMaP Gauge) achieved to compensate GSmAP MVK precipitation by gauge data. The method is not applied to GSmAP NRT, because we do not get global rain gauge data in 4 hour. We developed new GSmAP Gauge adjusted GSmAP NRT (GSMaP Gauge NRT). The new method estimate adjustment parameters for GSmAP NRT using previous GSmAP Gauge and GSmAP MVK. The method modify precipitation of the GSmAP NRT with these parameters. Distribution of monthly precipitation of GSmAP Gauge NRT is close to that of GSmAP Gauge. We will introduce GSmAP Gauge NRT algorithm and present validation of the GSmAP Gauge NRT.

キーワード：降水、マイクロ波放射計、GSMaP

Keywords: precipitation, microwave radiometer, GSmAP

地上レーダデータを用いたGPM/DPRの降水強度の評価

Evaluation of the rain rate estimates of GPM/DPR using ground radar data

*下妻 達也¹、瀬戸 心太¹*Tatsuya Shimozuma¹, Shinta Seto¹

1.長崎大学

1.Nagasaki University

1. はじめに

2014年3月より、全球降水観測計画(Global Precipitation Measurement)のGPM主衛星の運用が行われている。GPM主衛星は二周波降水レーダ(DPR)を搭載しており、DPRは比較的強い雨の観測に優れるKuPRと、比較的弱い雨や雪などの固体降水の観測に優れるKaPRの2つのレーダから構成されている。DPRを搭載した人工衛星による降水観測は初の試みであり、観測結果については十分な評価が必要である。そこで本研究では、地上レーダによる観測結果として国土交通省の運用するXRAINに着目し、DPRの観測結果との比較を行う。また、両者の観測結果の違いについて評価を行う。

2. 比較方法

XRAINは国土交通省の運用している地上降水レーダである。従来の広域レーダと比較して高頻度(1分間隔)、高解像度(250mメッシュ)の観測が可能であり、2016年2月現在で日本の14箇所にて運用が行われている。この研究では、九州北部にて運用が行われているレーダに着目し、DPRの観測結果との比較を行う。DPRとXRAINは解像度が異なっているため、DPRのフットプリント内のXRAINの降水強度の平均を算出し、DPRの降水強度と比較を行う。なお、DPRの降水強度は、地表面のクラッターの影響を受けない高さのものをを用い、プロダクトのバージョンはV03Bを用いた。

3. 降水強度の比較

DPRとXRAINの降水強度観測結果について比較を行う。DPRとXRAINの観測範囲が重なっており、なおかつ降水の観測された事例は、2014/6~2016/1の間で現在46ケース見つかった。この章では、2015/07/07 03:27(JST)(DPR orbit:7703)に観測された事例について示す。図1にXRAINとDPRの降水強度を示す。全体的にXRAINのほうが降水強度は強くなっており、降水の観測された範囲にも違いが見られる。また、XRAINの降水強度は放射状に広がる線状の分布が見られる。図2はXRAINとDPRの降水強度の散布図である。X軸に内挿したXRAINの降水強度、Y軸にDPRの降水強度を示している。また、赤いプロットが層状性降雨、青いプロットが対流性降雨を示している。図より、全体的にXRAINのほうにプロットが集中しており、バイアスの値もマイナスの値となった。

4. 全マッチアップ事例の比較

この章では、全マッチアップ事例を使った比較結果について示す。図3にXRAINとDPRの降水強度の散布図を示す。灰色のコンターは各観測点の結果、赤いラインはXRAINの降水強度に対するDPRの降水強度の平均値を示している。図より、全体的に降水強度はXRAIN側に過大評価となっており、平均値のラインもXRAIN>DPRとなっている。要因としては、着目している高さが異なる点、XRAINがレーダ中心から離れるほど推定精度が減少する点が挙げられる。DPRは降水の3次元データを取得できるため、今後は着目高さを合わせた比較を行う予定である。

5. 結論

GPM主衛星は2014年2月より運用されている。DPRによる観測は初めての試みであり、観測結果の評価が必要である。そこで、地上レーダXRAINの観測結果に着目し、DPRとXRAINの降水強度について比較を行った。結果、XRAINの降水強度が過大評価される結果となった。要因としては、着目高さと地上レーダからの距離が挙げられる。今後は、着目高さを統一した比較を行う予定である。

キーワード：全球降水観測計画、二周波降水レーダ、XバンドMPレーダ

Keywords: Global Precipitation Measurement (GPM), Dual-Frequency Precipitation Radar (DPR), MLIT X-Band MP Radar Network (XRAIN)

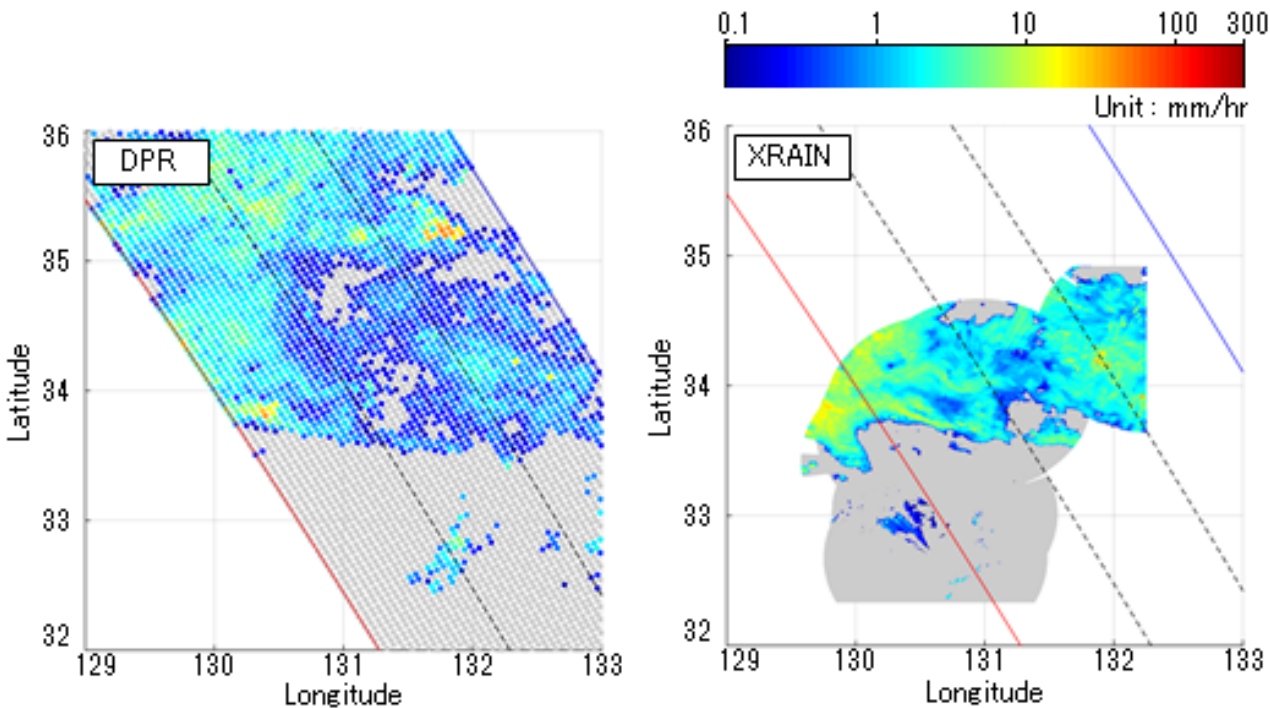


Fig1 The rain rate estimates

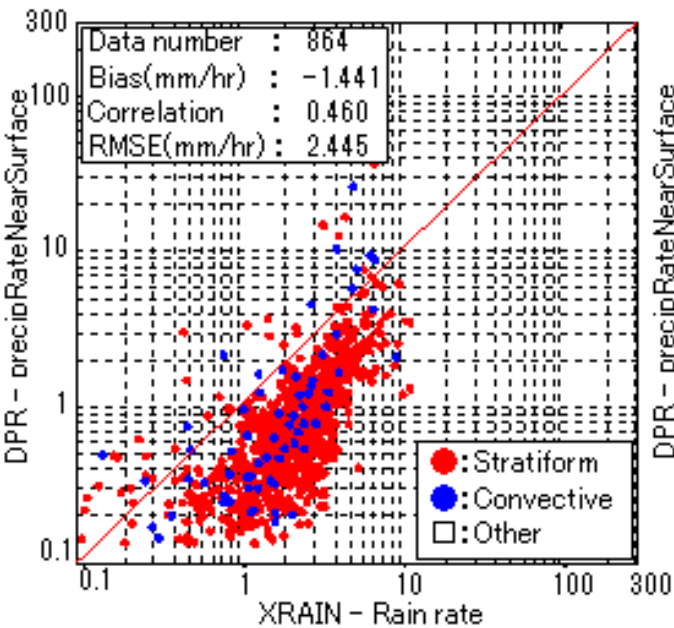


Fig2 Scatterplot of the rain rate

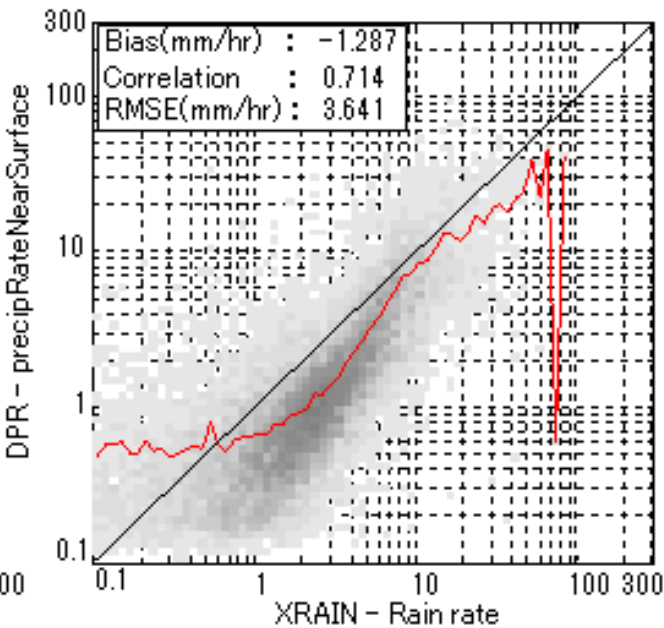


Fig3 2-D histogram of the rain rate

PRとTMIの降水経年変動の違い

A difference in the interannual variability of precipitation between PR and TMI

*金丸 佳矢¹、久保田 拓志¹、可知 美佐子¹、沖 理子¹、井口 俊夫²、高数 縁³

*Kaya Kanemaru¹, Takuji Kubota¹, Misako Kachi¹, Riko Oki¹, Toshio Iguchi², Yukari Takayabu³

1.宇宙航空研究開発機構 地球観測研究センター、2.情報通信研究機構、3.東京大学 大気海洋研究所

1.earth observation research center, japan aerospace exploration agency, 2.National Institute of Information and Communications Technology, 3.Atmosphere and Ocean Research Institute, University of Tokyo

Precipitation has an important role in maintaining the hydrological cycle on the earth's climate, so that understanding the long-term variability of precipitation is essential to provide for the future such as the decadal climate variability or the climate change. It is, however, well known that the interannual variability of precipitation associated with El Nino Southern Oscillation (ENSO) is different between the Tropical Rainfall Measuring Mission (TRMM) Precipitation Radar (PR) and the TRMM Microwave Imager (TMI) estimates (Robertson et al. 2003; Wang et al. 2008; Lau and Wu 2011). The current study is aimed to explore the origin of the difference of the interannual variability of precipitation between PR and TMI.

The current study focuses on the differences in the precipitation type (convective and stratiform types) and its interannual variability. The precipitation estimates derived from PR (2A25; Iguchi et al. 2009) and TMI (2A12; Kummerow et al. 2011) products are individually divided into stratiform and convective precipitation estimates. The PR product contains results of the precipitation type in each pixel, but the TMI product contains together in same pixel. These data are projected onto a common 0.5 degrees gridded instantaneous data with ascending and descending orbits and sampled only where PR and TMI observations are available. Data are analyzed in the El Nino season (December 1997 to May 1999) and the La Nina season (December 1999 to May 2000) and compared between PR and TMI. Differences in unconditional precipitation average of convective and stratiform types over semi-global (35S-35N) oceans are overall same between PR and TMI in the La Nina season, because the database for the TMI retrieval was generated by means of the PR observation in this period. On the other hand, the difference in the convective precipitation between PR and TMI (TMI is generally higher than PR) are obviously found in the El Nino season, while the stratiform precipitation is similar between PR and TMI. The regions where the difference in convective precipitation between PR and TMI are large are found in warm sea surface temperatures (SSTs) for 300 to 303 K and moist column water vapors (CWVs) for 66 to 75 mm and frequently located over the central Pacific in the El Nino season. In the El Nino event, the ratio of stratiform precipitation against total precipitation central Pacific was increased (Schumacher and Houze 2003), which implies that the TMI does not follow the interannual nature-variability of the precipitation characteristics observed by the PR.

キーワード：降水レーダ、マイクロ波放射計、経年変動

Keywords: Precipitation Radar, Microwave radiometer, Interannual variability

ひまわり8号降雨推定プロダクト精度向上のための降水雲の時間変化情報の取り込み

Additional information of precipitating cloud life stages for Improvement of rain rate data estimated from Himawari-8

*広瀬 民志¹、樋口 篤志¹、妻鹿 友昭²、牛尾 知雄²、山本 宗尚³、重 尚一³、濱田 篤⁴

*Hitoshi Hirose¹, Atsushi Higuchi¹, Tomoaki Mega², Tomoo Ushio², Munehisa K Yamamoto³, Shoichi Shige³, Atsushi Hamada⁴

1.千葉大学環境リモートセンシング研究センター、2.大阪大学工学研究科、3.京都大学理学研究科、4.東京大学大気海洋研究所

1.Center for Environmental Remote Sensing, Chiba University, 2.Department of Engineering, Osaka University, 3.Department of Science, Kyoto University, 4.Atmosphere and Ocean Research Institute, The University of Tokyo

広域・高時間分解能の降水観測データを得るために、マイクロ波放射計搭載衛星による高精度降雨観測は非常に重要である。しかしマイクロ波衛星は台数が限られているため短時間で全球をカバーすることはできない。そのようなマイクロ波観測の利用できない場所では、静止気象衛星から得られた高時間分解能の降水関連情報を用いることで降雨推定精度の向上が期待できる。Kühnlein et al. (2014) はMETEOSAT第二世代の静止気象衛星 (MSG-2) に搭載されている10チャンネルの観測輝度情報を、Random Forest (RF) と呼ばれる統計的手法によって地上レーダの降雨観測と関連付けることで、静止気象衛星と同様の高時間分解能で降雨推定が可能になるとしている。この手法はまず静止気象衛星観測からランダムにいくつかのチャンネルを抽出し、降雨・非降雨を分類するための場合分けのツリーを作成する。このツリーを量産し、最終的に各ツリーの判定結果の多数決によって降雨域が決定される。また特筆すべきは降雨域だけでなく降雨タイプの判別や降雨強度の推定も可能であるという点である。本研究ではこのRF手法を現在世界唯一の第3世代静止気象衛星ひまわり8号の10分毎全球マルチチャンネル観測に適用することによって、マイクロ波降雨観測網を補うことのできる高時間分解能の降雨推定プロダクトを作成した。さらにRF手法の機械学習に用いる降雨の真値を、先行研究で用いられていた地上観測からGPMの衛星降雨観測に置き換えることによって、ひまわり8号の観測域全体での降雨推定を可能にした。

ひまわり8号降雨プロダクトの精度検証のために、推定降雨域のスレットスコアを気象庁合成レーダの降雨観測を真値として計算した結果、可視チャンネルの使える日中では0.5以上と非常に高く夜間でも0.42以上でマイクロ波観測に匹敵する精度が得られた。またひまわり8号から新たに追加されたチャンネルが降雨推定に対してどの程度有効であるのかを調べたところ、降雨判定に関しては観測波長0.46 μ mの青色可視チャンネルが最も貢献しており、降雨タイプの判別には雲相判別のための1.6 μ mの近赤外チャンネルが最も寄与率が高いことがわかった。また降雨強度の二乗平均誤差は1.3 mm/hourであったが、8.0 mm/hourを超えるような強い雨に対しては過小評価傾向がみられた。これはRF手法によって推定された降雨強度がひまわり8号輝度温度観測から得られた雲頂温度（高度）情報に強く依存するため、降雨を伴わない薄い巻雲と降雨を伴う厚い対流雲を十分に分離できていないことが原因であると考えられる。この問題に対処するため、ひまわり8号の高時間分解能観測から得られた降水雲の時間変化情報を取り込むことで、対流性降雨の推定精度をさらに向上させる試みを行った。まずひまわり8号の全球10分毎観測から降水雲の移動ベクトルを計算する。次にこの移動ベクトルを元に降水雲の軌道を追跡し、そこから得られた過去1時間の間の降水雲の輝度温度変化の情報をRFに取り込むことで、降水雲の発達段階の情報を含むより精度の高い降雨推定プロダクトを作成する。当日は改良後のひまわり8号降雨プロダクトによる日本付近での事例解析結果についても発表する。

本研究で使ったひまわり8号観測データは全て文部科学省特別教育研究経費プロジェクト「地球気候系の診断に関わるバーチャルラボラトリーの形成」の一環として作成され、千葉大学環境リモートセンシング研究センターが公開するものである。降雨観測の真値として気象庁合成レーダの換算降雨強度とGPM主衛星のKuバンド降雨レーダによる地上降水強度を用いた。

キーワード：ひまわり8号、GPM、降水、GSMaP

Keywords: Himawari-8, GPM, precipitation, GSMaP

静止気象衛星赤外スプリットウィンドウ観測を用いた雲気候データベースの作製
Climatological Cloud Database Estimated by Geostationary Satellite Split-Window
Measurements

*西 憲敬¹、濱田 篤²、広瀬 民志³、向川 均⁴

*Noriyuki Nishi¹, Atsushi Hamada², Hitoshi Hirose³, Hitoshi Mukougawa⁴

1.福岡大学理学部、2.東京大学大気海洋研究所、3.千葉大学環境リモートセンシング研究センター、4.京都大学防災研究所

1.Faculty of Science, Fukuoka University, 2.AORI, University of Tokyo, 3.CERES, Chiba University, 4.Disaster Prevention Research Institute, Kyoto University

We extended our cloud-top database spatially to the midlatitude and temporally to new satellite Himawari-8. We have already released a database of cloud top height and visible optical thickness (CTOP) with one-hour resolution over the tropical western Pacific and Maritime Continent, using infrared split-window data of the geostationary satellites (MTSAT-1R and MTSAT2) (<http://database.rish.kyoto-u.ac.jp/arch/ctop/>). By comparing MT-SAT IR observation and the direct observation of the cloud top height by CloudSat radar, we can construct a lookup table (LUT) with which the cloud top height is estimated by using only MTSAT data. Unfortunately, now in the age of Himawari-8 that has been available since July 2015, the CloudSat observations are limited in the daytime and the precise direct comparison with the data cannot be conducted to construct LUT. Therefore, we proceeded an alternative way by constructing a calibration table based on the comparison between MTSAT-2 and Himawari-8 observations during July 2015 when both geostationary satellites were in operation. By using the similar approach repeatedly, it will be possible to construct LUT for the past geostationary satellites that had been in operation before the launch of CloudSat in 2006.

We also tried to extend the targeted region to the mid-latitude. In our present scheme applicable for only tropics, the vertical profile of temperature is assumed to be almost constant in whole tropics and all the year. However, since the temperature variability is much larger in mid latitude, it is not plausible to assume that the same IR radiance comes from the clouds with a certain top height. Therefore, we proposed a new method to use temperature data of the global analysis together. The temperature of the cloud top is estimated through the altitude of the cloud top observed by CloudSat as well as the temperature profile deduced from the global analysis data. Then we constructed LUT of cloud top temperature (not height) by the regression of the MTSAT IR radiance with respect to cloud top temperature. We can get the cloud top height at any point at any time by converting the cloud top temperature to cloud top height, with using global analysis data. A preliminary estimate using this method indicated that the cloud top height is estimated within allowable error even in the mid latitude.

キーワード：静止衛星、雲、データベース

Keywords: geostationary satellite, cloud, database

Simultaneous retrieval of aerosol optical thickness and chlorophyll concentration using multi-wavelength and multi-pixel method

*CHONG SHI¹, Teruyuki Nakajima¹, Makiko Hashimoto¹, Hideaki Takenaka¹

1.JAXA/EORC

This study proposes an algorithm for the simultaneous retrieval of aerosol optical thickness(AOT) and chlorophyll concentration using multi-wavelength and multi-pixel method over ocean. In our algorithm, the forward radiation calculation is performed by a coupled atmosphere-ocean model(Ota et al., 2010; Nakajima and Tanaka, 1986) with an improved bio-optical ocean module(Shi et al., 2015) for CASE 1 water, which is different to the traditional ocean color algorithms which decouple the atmosphere and ocean surface(Gordon and Wang, 1994) using atmospheric correction procedures; then the Maximum a posterior method(Rodger, 2000) but considering the spatial constrain incorporated with the multi-pixel optimization algorithm(Hashimoto, 2014) is used to retrieval aerosol optical thickness and chlorophyll concentration. For the AOT retrieval, a global aerosol transport-radiation model named SPRINTARS(Takemura et al., 2000) is used as the priori constrain; Finally, the inversion results are achieved from HIMAWARI-8 and GOSAT-TCAI satellite observation data through comparison to AERONET products and other aerosol retrieval algorithm which is widely used in satellite remote sensing.

Keywords: Aerosol, Ocean color, Remote sensing, Radiative transfer

GOSATによる太陽光誘導クロロフィル蛍光と大気CO₂濃度の同時観測Simultaneous observations of solar-induced chlorophyll fluorescence by vegetation and atmospheric CO₂ dynamics by GOSAT*野田 響¹、彦坂 幸毅²、村上 和隆¹、松永 恒雄¹*Hibiki M Noda¹, Kouki Hikosaka², Kazutaka Murakami¹, Tsuneo Matsunaga¹

1.国立研究開発法人国立環境研究所、2.東北大学

1.NIES National Institute of Environmental Studies, 2.Tohoku University

In these decades, global warming has progressed owing to increase of greenhouse gases (GHGs) such as CO₂. To deal effectively with this issue by mitigation and adaptation, it is necessary to monitor emission and sequestration of GHGs with their underlying mechanisms including biogeochemical processes and human activities. Terrestrial ecosystem, which is the large carbon sink, absorbs 123 Pg carbon per year through plant photosynthesis (IPCC 2014). Satellite remote sensing has been used to monitor the spatial and temporal dynamics of terrestrial ecosystems that are responsible for such photosynthetic CO₂ absorption. Such observation provides us with geographical information on the potential distribution of carbon sequestration by the aid of ecosystem models. However, as the photosynthesis of a given vegetation is quite sensitive to meteorological changes such as radiation, temperature and precipitation, we need to observe the photosynthetic 'activity' in a physiological sense, together with the atmospheric CO₂ concentration over continental and global scales. Joiner et al. (2011) and Frankenberg et al. (2011) have suggested that TANSO FTS on Greenhouse Gases Observing Satellite (GOSAT) could detect overlapping part of solar-induced chlorophyll fluorescence (SIF) emitted by terrestrial vegetation and Fraunhofer line. The chlorophyll fluorescence is photons of red and far-red light that emitted by chlorophylls, and in plant ecophysiology it has been a biophysical index to examine the photosynthetic responses to environmental stresses such as extreme temperatures and drought. Thus SIF remote sensing is drawn considerable attention as a new technique to observe the photosynthetic activity of the vegetation. This paper will present our on-going and future challenges by GOSAT and GOSAT-2 to observe such photosynthetic activity of terrestrial ecosystems and its possible consequences with the atmospheric CO₂ concentration from national, continental to global scales under climate change.

キーワード：陸域炭素循環、光合成生産

Keywords: carbon cycle of terrestrial ecosystem, photosynthetic production

GOSAT-2 FTS SWIR 設計結果に基づく感度解析初期結果

Preliminary sensitivity study of the GOSAT-2 FTS SWIR retrievals based on the designed specifications

*吉田 幸生¹、亀井 秋秀¹、森野 勇¹、齊藤 誠¹、野田 響¹、松永 恒雄¹

*Yukio Yoshida¹, Akihide Kamei¹, Isamu Morino¹, Makoto Saito¹, Hibiki Noda¹, Tsuneo Matsunaga¹

1. 国立環境研究所

1. NIES

The Greenhouse gases Observing SATellite (GOSAT) was launched in January 2009 and observed global distribution of the column-averaged dry air mole fractions of carbon dioxide and methane (XCO_2 and XCH_4) for about seven years. As a successor mission to the GOSAT, GOSAT-2 is planned to be launched in early 2018, and its critical design review (CDR) was completed. GOSAT-2 also has a Fourier transform spectrometer (FTS) like GOSAT to obtain short-wavelength infrared (SWIR) light reflected from the earth's surface and thermal infrared (TIR) radiation emitted from the ground and atmosphere. According to the current design of the FTS-2 (FTS onboard the GOSAT-2), its SNR is higher than or almost equal to that onboard the GOSAT, and it covers the 2.3 μm carbon monoxide (CO) band as well as the 1.6 and 2.0 μm CO_2 bands and 1.67 μm CH_4 band. Our preliminary sensitivity test shows that the SNR improvement in SWIR bands reduces the retrieval random error (precision) about 15% for XCO_2 and 35% for XCH_4 than those of GOSAT.

キーワード：温室効果ガス観測技術衛星2型、二酸化炭素カラム平均濃度、メタンカラム平均濃度

Keywords: GOSAT-2, XCO_2 , XCH_4

Applied FORMOSAT-3/COSMIC on observing atmospheric temperature changes caused by volcanic eruptions

*Chun-Chieh Hsiao¹, Jann-Yenq Liu², Hsin I Lai¹, Yi Cheng Chiu, Shiann-Jeng Yu¹, Guey-Shin Chang¹

1.National Space Organization, 2.Graduate Institute of Space Science, National Central University

Volcanic eruptions are often along with fiery magma, hot dense gases and powerful explosive energy. Those materials injected into atmosphere might cool tropospheric temperature and warm the temperature of bottom of stratosphere but sometimes the phenomenon was exactly opposite or mixture. This study focused on 8 volcanic eruptions, the explosive indexes of which were 4 during 2008 to 2011 and analyzed the temperature-related data from radio occultation observations of FORMOSAT-3/COSMIC (F3/C). It individually investigated the temporal latitude-altitude and longitude-altitude variances atmospheric temperatures from northeastern, northwestern, southeastern and southwestern of volcanos before and after the eruptions. This study also observed the image from Moderate resolution Imaging Spectroradiometer (MODIS) on NASA terra satellite to see where the volcanic plum extended. Results apparently show that 3 events had cooling troposphere and warming bottom of stratosphere and 2 events were just the opposite. One of the rest events was mixture case and the other one of the rest was without apparent variances in temperature. Cooling troposphere and warming bottom of stratosphere caused by stratospheric aerosols that reduced sunlight reaching troposphere and absorbed radiation at the bottom of stratosphere. The consequence opposite to above was caused by that volcanos erupted hot and high density gases into troposphere and adiabatic expansion happened during the top of troposphere and bottom of stratosphere. Moreover, in mixture case, area with more volcanic ash showed decreasing temperature in the troposphere and increasing temperature at the bottom of stratosphere. Area with less volcanic ash showed increasing temperature in the troposphere and decreasing temperature at the bottom of stratosphere.

Keywords: FORMOSAT-3/COSMIC, volcano

EarthCARE/MSI観測データを用いた雲特性解析

Cloud properties analysis based on EarthCARE/MSI observation

*高木 聖子¹、永尾 隆²、石田 春磨³、Letu Husi⁴、橋本 真喜子²、中島 孝⁵

*Seiko Takagi¹, Takashi Nagao², Haruma Ishida³, Husi Letu⁴, Makiko Hashimoto², Takashi Nakajima⁵

1.東海大学情報技術センター、2.宇宙航空研究開発機構、3.気象研究所、4.中国科学院、5.東海大学情報理工学部情報科学科

1.Tokai University, Research and Information Center, 2.Japan Aerospace Exploration Agency, 3.Meteorological Research Institute, 4.Institute of Remote Sensing and Digital Earth, Chinese Academy of Sciences (CAS), 5.Tokai University, School of Information Science & Technology, Dept. of Human & Information Science

雲・エアロゾルは地球の放射収支や気候変動に重要な影響を与えることが知られている。しかしIPCC第四次評価報告書によれば、雲・エアロゾル及びそれらの相互作用に関する知見不足は、気候変動予測に不確実性が生じる一因と認識されている。

EarthCARE (Earth Clouds, Aerosols and Radiation Explorer) は、ESA・JAXAが共同で開発を進める地球観測衛星である。搭載される4つのセンサ(雲プロファイリングレーダ(CPR)、大気ライダー(ATLID)、多波長イメージャ(MSI)、広帯域放射収支計(BBR))は、これまで十分な観測が行われてこなかった雲・エアロゾルを全球的に観測し、両者の地球大気中における役割の理解に有用なデータを取得する。EarthCAREは雲・エアロゾルに関する知見不足を解消し、気候変動予測の精度向上に貢献する重要な観測である。

搭載される多波長イメージャMSIは、可視(0.67 μm)から熱赤外(12.00 μm)までの複数波長において観測を行い、雲・エアロゾルの3次元的理解を目指す。本研究では、CLAUDIA [Ishida and Nakajima, 2009]・CAPCOM [Nakajima and Nakajima, 1995; Kawamoto et al., 2001]・MWP法[橋本真喜子氏 博士論文2015]を元に開発を進めたアルゴリズムを用いて、MSI観測データから雲特性を導出する。本発表では、各アルゴリズム開発の現状とMODIS観測データを用いた雲特性解析結果を報告する。

キーワード：EarthCARE、雲

Keywords: EarthCARE, cloud

衛星エアロゾルリトリバル手法の開発と事例解析の紹介

Development of remote sensing algorithm to retrieve aerosol optical properties and introduction of the results of case studies

*橋本 真喜子¹、竹中 栄晶¹、日暮 明子²、中島 映至¹

*Makiko Hashimoto¹, Hideaki Takenaka¹, Akiko Higurashi², Teruyuki Nakajima¹

1.宇宙航空研究開発機構、2.国立環境研究所

1.Japan Aerospace Exploration Agency, 2.NIES

We have developed a satellite remote sensing algorithm to retrieve the aerosol optical properties using multi-wavelength and multi-pixel information of satellite imagers (MWP). We simultaneously retrieve several parameters that characterize pixels, such as aerosol optical thickness (AOT) of fine and coarse mode particles, single scattering albedo (SSA), and ground surface albedo of each observed wavelength, in each of horizontal sub-domains consisting the target area.

We applied the algorithm to GOSAT/TANSO-CAI and Himawari-8/AHI data. We will show the retrieval results of aerosol characteristics over the urban and forest fire regions such as the Kanto area in Japan and Beijing in China. We also tried to retrieve aerosol properties at a forest fire case, so we would like to introduce the retrieval results over the forest fire regions in Indonesia.

From the results, AOT over the urban or high population areas is larger than that around rural or the low population areas. Furthermore, the SSA is lower in the urban region. For the forest fire case, the AOT and SSA along the plume are higher and lower than that of the other region, respectively. Although the AOT of fine mode totally looks dominant, the Angstrom exponent around the hot spot is lower than that of the leeward side, and increase with the increasing distance from the hot spot.

キーワード：リモートセンシング、エアロゾル、衛星

Keywords: Remote sensing, Aerosol, Satellite

Eddy Effect on the Kuroshio East of Taiwan from Satellite Altimetry

*Chungru Ho¹, Po-Chun Hsu¹, Chen-Chih Lin¹, Shih-Jen Huang¹

1.Natl. Taiwan Ocean Univ.

Kuroshio is a western boundary current in the North Pacific Ocean. It flows northward along the east coast of Taiwan. Previous studies have shown that there is an eddy-rich zone located at 18°-26°N, 122°-160°E. The westward propagating eddies may affect the axis of Kuroshio when they impinge the Kuroshio east of Taiwan. To more understand the phenomenon, satellite altimeter data are used to investigate effects of oceanic mesoscale eddy on the Kuroshio from 18°N to 26°N. The Kuroshio axis is defined as a line with the maximum surface velocity along the Kuroshio path. The velocity of Kuroshio is calculated from the absolute dynamic topography data derived from satellite altimetry with the geostrophic relations. The results show that the Kuroshio meander occurred 13 times from 1993 to 2013 which were caused by westward or northward moving cold eddies when they propagated to the east of Taiwan. The average duration of the meanderings was 27 ± 20 days, and the maximum duration was 80 days. The farthest position of the Kuroshio axis meandering was approximately 270 km from the average Kuroshio axis. It is affected by the size of the cold eddy. Under the circumstances of a cold eddy, the mean speed of the Kuroshio axis drops to 0.63 m/s, which is approximately 84% of the seasonal average.

Keywords: Kuroshio, meander, eddy, satellite altimetry

The Central-Pacific type of ENSO and its connection to Pacific Meridional Mode

*ChunYi Lin¹

1. National Museum of Marine Science & Technology

In this study, we examine the simulation of the Pacific meridional mode in pre-industrial experiments of the Coupled Model Intercomparison Projects Phase (CMIP5) and link the Pacific meridional mode simulations to the simulation of the Central-Pacific (CP) and Eastern-Pacific (EP) types of El Niño Southern Oscillation (ENSO). Objective criteria are developed to evaluate the model performance in Pacific meridional mode simulations, which gauge the intensity, spatial pattern, air-sea coupling strength, and persistence strength of the coupling of the model meridional mode. Our analyses indicate that most of the CMIP5 model overestimate the air-sea coupling strength in the subtropical where the Pacific meridional mode model occurs, but underestimate the persistence of the coupling. Based on our criteria, ten CMIP5 models are found capable of realistically simulating the Pacific meridional mode. Further analyses reveal that CMIP5 model simulations of the CP ENSO is linked to the model performance in simulating the Pacific meridional mode; the models that are more capable of simulating the Pacific meridional mode also produce stronger CP ENSO. This study demonstrates that the subtropical dynamics and coupling affect the ability of CMIP5 models in simulating the different flavors of ENSO, which should be considered as one of the importance matrices for CMIP5 model evaluation.

Keywords: Central-Pacific types of ENSO, Eastern-Pacific types of ENSO, Pacific meridional mode

AMSR2海洋圏プロダクトの検証 –検証システムの構築–

Validation of AMSR2 ocean products –Construction of validation system–

*日原 勉¹、富田 裕之²*Tsutomu Hihara¹, Hiroyuki Tomita²

1.東海大学大学院地球環境科学研究科地球環境科学専攻、2.名古屋大学宇宙地球環境研究所

1.Tokai University, Doctor's Course of Earth and Environmental Science, 2.Nagoya University,
Institute for Space-Earth Environmental Research




地球環境変動観測ミッション（GCOM）では、全球規模の気候変動や水循環変動メカニズムの理解に必要不可欠な地球物理パラメータを長期継続的に観測するために、2012年に高性能マイクロ波放射計2（AMSR2）を搭載した水循環観測衛星GCOM-Wを打ち上げている。宇宙航空研究開発機構（JAXA）は、AMSR2によって観測された輝度温度から、海洋圏プロダクトとして、海面水温データと海上風速データを作成し、2013年5月に一般提供を開始している。通常、衛星データは、一般提供が開始された以降も精度検証とアルゴリズム改善が繰り返えしによって、比較的頻繁にアップデートされる。AMSR2の海洋圏プロダクトにおいても、これまでに1度のアップデートが行われており、今後もアップデートされることが予想される。そこで、本研究では、長期的、統一的な視点で、AMSR2海洋圏プロダクトの精度や信頼性を検証し、校正に有効な情報を迅速かつ継続的に提供するシステム（Validation System; VS）の開発を行っている。

VSは、主に、「複数の格子データ間の相互比較」と「現場観測データとの比較」の2つの評価コンポーネントによって構成されている。前者の評価コンポーネントでは、格子データごとの平均場、標準偏差場、領域平均値の時間変化や、予め用意されたリファレンスデータとの平均差、RMS差などが計算される。後者の評価コンポーネントでは、品質管理を徹底して行った係留ブイや船舶データとの比較が行われる。比較項目は、バイアス、RMS誤差、相関係数などの基本的な統計量および、散布図と時間変化図である。我々は、これらの評価結果を、VSによって自動生成されるhtmlファイルによって、ウェブブラウザからグラフィカルに確認できるように設計している。

VSの実行例として、添付図に、ブイデータとAMSR2海面水温データの評価結果のスクリーンショットを示す。この例では、2012年から2014年までの3年間に、97基のブイによって観測された24660個の日平均値データを用いて、AMSR2海面水温データを評価している。出力される統計値および、図は、全てのブイによる結果だけではなく、年ごと、緯度帯ごと、個々のブイごとの結果も参照することが出来る。

キーワード：GCOM-W、AMSR2、係留ブイデータ、海上気象、海面水温

Keywords: GCOM-W, AMSR2, mooring buoy data, marine meteorology, sea surface temperature

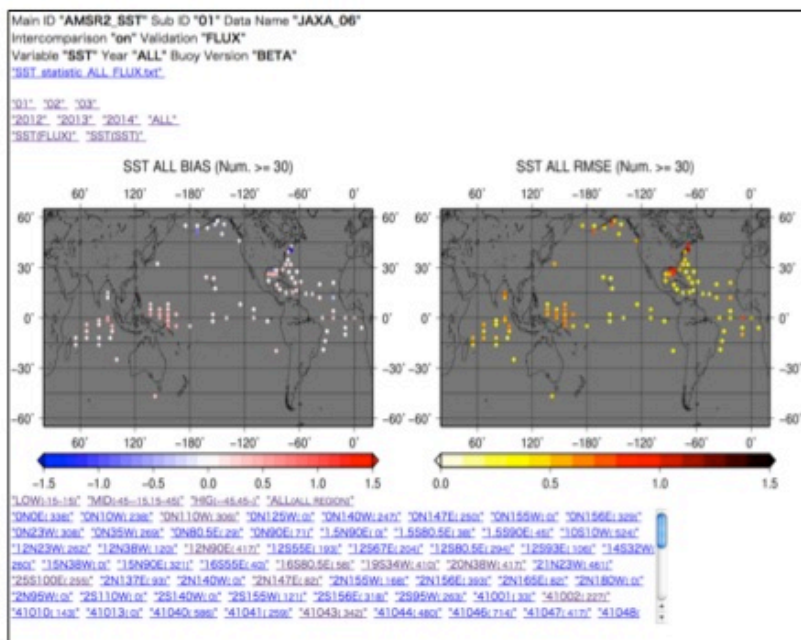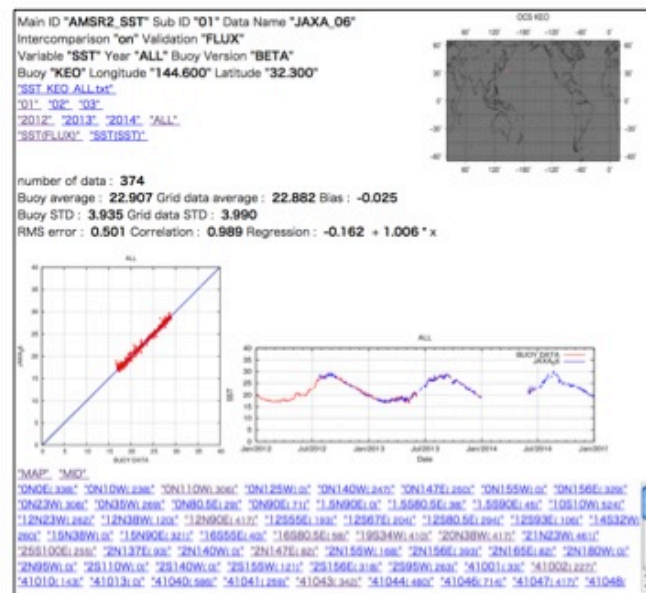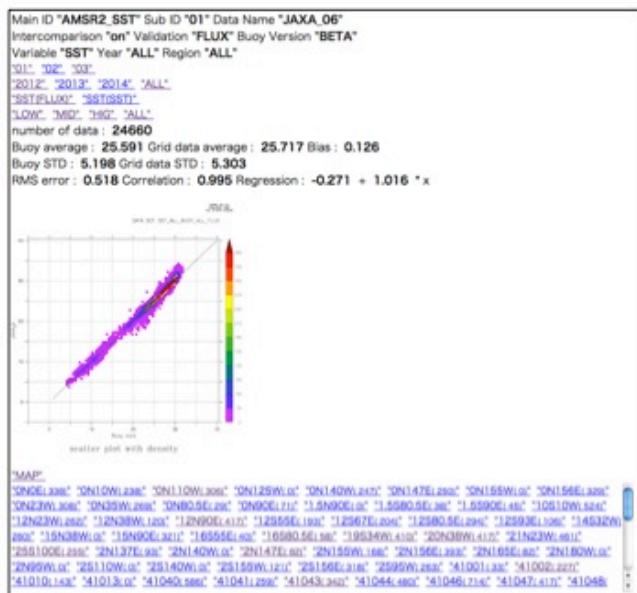

Applying Big Data Analysis Method to Improvement Sea Surface Temperature of Geostationary Satellite.

*Yung Shiang Lee¹, Feng Chun Su², Yu Mei Yeh¹, Chun Yi Lin², Yu Hsin Chen³

1.Department of Marketing & Distributioin Management, Hsiang Wu University, 2.National Museum of Marine Science & Technology , Taiwan, 3.State Key Laboratory of Marine Environmental Science, College of Ocean and Earth Sciences, Xiamen University, Xiamen, China

Big Data is the amount of data involved enormous and cannot be the information within a reasonable period of time to query, retrieve, manage, and analyze. The Big Data are three qualities: Volume, Velocity, and Variety, which information in many fields have brought progress and a breakthrough opportunity. Recent studies sea surface temperature mostly as a reference material Moderate Resolution Imaging Spectroradiometer (MODIS). Sun-synchronous satellites significantly better than geostationary satellites at a time resolution. The equatorial region of the tropical Pacific SST bias main factors are wind speed and air temperature in past studies. In this study, used big data commonly algorithms to provide sea surface temperature (SST) image hourly data. We apply and compare data mining techniques to improve the quality of GOES SST product. By a logistic regression approach, the GOES SST can be determined with an accuracy of 0.4°K and an improvement of the correction to 95%.

Keywords: Big Data, Sea Surface Temperature, Tropical Pacific

The Evolution of internal wave from mode-one to mode-two

*fengchun Su¹

1.National Museum of Marine Science & Technology

Internal waves (IWs) are observed in the ocean all over the world. In the northern South China Sea, internal waves are frequently monitored between the Luzon Strait and Hainan Island by several satellites, such as optical or radar satellites. The wave crest can be as long as 200 km. It's amplitude is larger than 170 m. The huge amplitude maybe the largest than that ever observed in the world's oceans. The huge IW is usually observed in the deep sea area between the Luzon Strait and Hainan Island. Then a small mode-two wave was observed following a huge mode-one IW on the shelf near Dong-Sha Atoll. Due to the different wave speeds, mode-one and mode-two waves would separate into two waves after decomposition on the shelf. Thus we thought the huge mode-one IW in deep sea area could be deposited into more modes of IW on the shelf.

In this study, the objective is to observe the generation and evolution of mode-one IWs in the deep sea area, and then the mode-one IW deposit into more modes of IWs on the shelf break. The generation of mode-two waves on the shelf by disintegration of mode-one IWs in the deep ocean is proposed and analyzed based on the theory of modal-decomposition. In this study, some historical measurement data and satellite image are used to detect IWs. Then, the environmental condition is from a mooring near Dong-Sha Island. For comparison, the characteristics of mode-one and mode-two waves from environmental parameters have been estimated. For the test case, water depth increases to 450 m the mode-two wave energy is decreasing to 14%, while it is increasing to 25% when water depth decreases to 350 m. So, the mode-two waves can be generated under favorable condition, especially for multiple layer stratification in the shallow water on shelf.

Keywords: internal wave, south china sea, mode-two