


## The preliminary study of the high-sampling coseismic groundwater level changes in M<sub>L</sub> 6.4 Tainan earthquake, Feb. 6th 2016

\*WENCHI LAI<sup>1</sup>, ShihJung Wang<sup>2</sup>, KuoChin Hsu<sup>3</sup>, Naoji Koizumi<sup>4</sup>

1.Disaster Prevention Research Center, National Chengkung University, Taiwan, 2.Geotechnical Engineering Research Center Sinotech Engineering Consultants, INC., Taiwan, 3.Department of Resources Engineering, National Chengkung University, Taiwan, 4.Department of Ecosystem Studies, School of Environmental Science, The University of Shiga Prefecture

The different response by various natural stimuli and processes (tidal force, barometric loading, ground shaking and crustal strain) were used as the elements of the hydraulic information in the earthquake induced groundwater level changes. Using the natural force to act as naturally recurring stimuli to provide a sufficiently varied distribution of excitations in time and space, and represented the hydro-geological changes responses to the earthquake processes. The purposes of this study are to analyze the recently observation results of the earthquake induced pre-seismic / co-seismic variation of groundwater level ML 6.4 Tainan earthquake, Feb. 6th 2016. The analysis of the high-sampling water level responses be used to estimate the mechanical properties of the aquifer. Comparison the observation high-sampling water level changes in the each event, offers the opportunity to discussion the possible mechanism of the hydrologic response to earthquake. Some of the coseismic groundwater level changes can be explained as the poroelastic responses to the earthquake-induced volumetric strain changes inferred from the fault dislocation models. But the other changes can not be explained by the volumetric strain changes either qualitatively or quantitatively. We regarded the coseismic static volumetric strain change and the ground acceleration as the main factors to cause the coseismic groundwater level changes. The study provides some information for the pre-seismic / co-seismic mechanism but more investigations are required

Keywords: Coseismic Changes, Groundwater, Earthquake

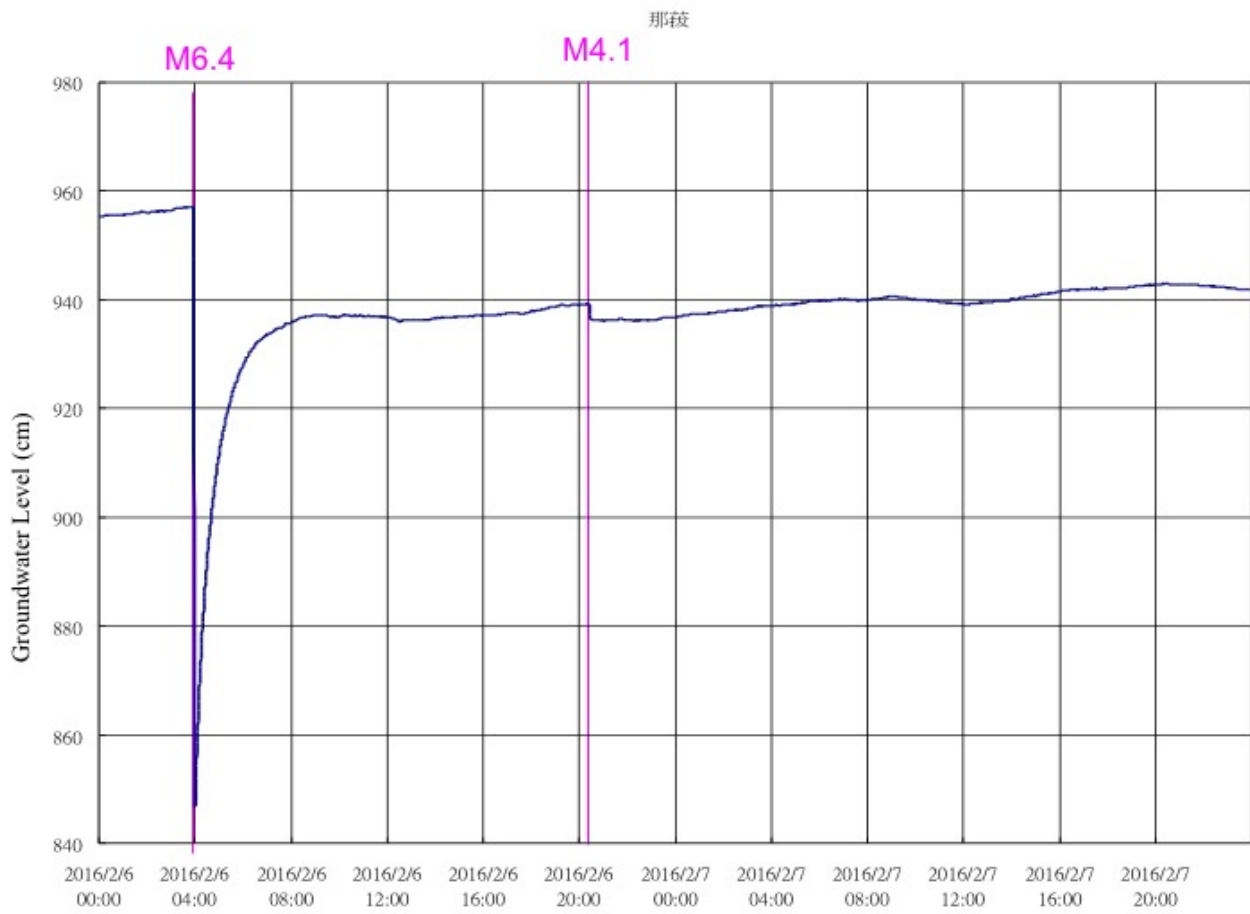

## Seismo-conductivity Anomalies: A case study of the M6.4 Meinong earthquake on Feb. 6, 2016 in Taiwan

\*Chieh-Hung Chen<sup>1</sup>, Cheng-Horng Lin<sup>2</sup>, Chun-Rong Chen<sup>3</sup>

1.Department of Earth and Environmental Sciences, National Chung Cheng University, Taiwan,  
2.Institute of Earth Sciences, Academia Sinica, Taipei, Taiwan, 3.Department of Earth Sciences,  
National Central University, Chung-Li, Taiwan

Anomalous phenomena of conductivity enhancements have been repeatedly observed before many earthquakes in Taiwan through orientations of the Parkinson vectors derived from 3-component magnetic data via the magnetic transfer function. Meanwhile, depths of conductivity anomalies can be roughly estimated while the skin effect is conducted into the frequency-dependent parameters of the magnetic transfer function. Locations of seismo-conductivity anomalies are determined by using anomalous orientations of the Parkinson vectors from three magnetic stations. Through the 3-year observation, locations of conductivity enhancements and hypocenters are often comparable that is obtained. The Meinong earthquake with the magnitude of 6.4 occurred in the southern part of Taiwan on Feb. 6 2016. High-conductivity anomalies associated with the M6.4 Earthquake were found in two areas. Anomalies located at the depth of 15 km were observed very close to the main shock on Jan. 31-Feb. 3, 2016. In contrast, the other anomalies at the depth of 30 km on Feb. 2-Feb. 6, 2016 are located at the northern part of the main shock in agreement with aftershocks.

Keywords: Pre-earthquake anomalous phenomena, Meinong earthquake, Seismo-conductivity anomalies

Multi parameters observations of pre-earthquake signals associated with M6.4 of Feb 06, 2016 in Taiwan. Preliminary results.

\*Dimitar Ouzounov<sup>1</sup>, Lou C. Lee<sup>2</sup>, J.Y. Liu<sup>3</sup>, C.H Chen<sup>3</sup>, Sergey Pulinet<sup>4</sup>, Menas Kafatos<sup>1</sup>

1.Center of Excellence in Earth Systems Modeling & Observations (CEESMO) , Schmid College of Science & Technology Chapman University, Orange, California, USA, 2.Institute of Earth Sciences, Academia Sinica, Taiwan, 3.Institute of Space Science, National Central University, Taiwan, 4.Space Research Institute, Russian Academy of Sciences, Moscow, Russia

We are conducting validation on temporal-spatial pattern of multi parameter signals with pre-earthquake origin associated with M 6.4 of Feb 02, 2016 earthquake in Taiwan. The continues analysis of outgoing long-wavelength radiation (OLR) obtained from NPOESS show rapid increase of OLR on the top of the atmosphere on Jan 1-2, 2016 (2.5 sigma significance for 25 years of analysis) and probably indicated for a large earthquake preparation process in Taiwan (map is attached). The time series variations of atmospheric chemical potential, characterizing the ionization processes inside ABL, show rapid increases during Jan 1-5 and Jan 10-15, 2016 periods. The Gamma network consisted by 4 stations registered similar anomalous pattern in increasing of the radon level during period of Jan 10-15, 2016 simultaneously on three of the stations close to the epicenter. Based on the 3-component geomagnetic data from 3 stations, high-conductivity anomalies were found in two different periods: i) Jan. 31-Feb. 3, 2016 - the anomalies were observed very close to the main shock and the ii) Feb. 2-Feb. 6, 2016 - anomalies are further North and associated with the followed aftershocks. The GIM reveals the TEC significantly enhances over Taiwan on 5 February 2016, one day before the earthquake.


Our preliminary analysis of simultaneous space and grounds measurements associated with M6.4 of Feb 06, 2016 in Taiwan suggest that pre-earthquake phase follows a general temporal-spatial evolution pattern revealed with multi instruments observations, which has been seen in other large earthquakes worldwide.

Keywords: earthquake, precursor, forecasting, prediction



## Satellite earthquake anomalous map for Taiwan region Jan 2, 2016

Dim.Ouzounov@gmail.com

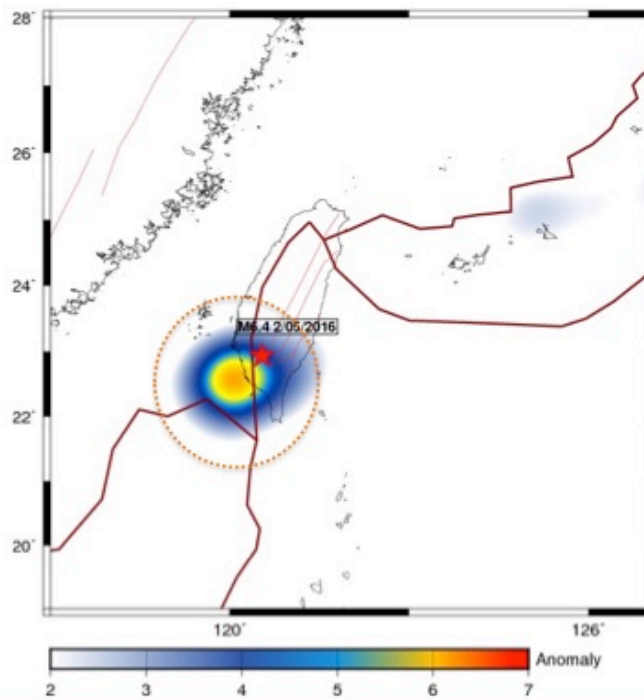

Data : NPOESS, With **red star** – epicenter of M6.4 of 02.06.2016. **Red lines**- plate boundaries , **brown** – faults, **dash circle** – estimated region for the future epicenter

Precursory gas geochemical and gamma rays anomalies prior to the 2016 M6.4 Meinong earthquake, southern Taiwan

Precursory gas geochemical and gamma rays anomalies prior to the 2016 M6.4 Meinong earthquake, southern Taiwan

\*Fu Ching<sup>1,2</sup>、Lee Lou<sup>1</sup>、Yang Tsanyao<sup>2</sup>、Wang Peng<sup>1</sup>、Liu Tsung<sup>2</sup>、Walia Vivek<sup>3</sup>、Chen Cheng<sup>2</sup>、Lin Cheng<sup>1</sup>、Lai Tzu<sup>4</sup>、Giuliani Gioacchino<sup>5</sup>、Ouzounov Dimitar<sup>6</sup>

\*Ching Chou Fu<sup>1,2</sup>、Lou Chuang Lee<sup>1</sup>、Tsanyao Frank Yang<sup>2</sup>、Peng Kang Wang<sup>1</sup>、Tsung Kwei Liu<sup>2</sup>、Vivek Walia<sup>3</sup>、Cheng Hong Chen<sup>2</sup>、Cheng Horng Lin<sup>1</sup>、Tzu Hua Lai<sup>4</sup>、Giocchino Giuliani<sup>5</sup>、Dimitar Ouzounov<sup>6</sup>

1.Institute of Earth Sciences Academia Sinica、2.Department of Geosciences, National Taiwan University、3.National Center for Research on Earthquake Engineering, NARL、4.Central Geological Survey, MOEA、5.Permanent Foundation G. Giuliani, L'Aquila、6.Chapman University, One University Drive, Orange

1.Institute of Earth Sciences Academia Sinica, 2.Department of Geosciences, National Taiwan University, 3.National Center for Research on Earthquake Engineering, NARL, 4.Central Geological Survey, MOEA, 5.Permanent Foundation G. Giuliani, L'Aquila, 6.Chapman University, One University Drive, Orange

Taiwan is tectonically situated in a terrain resulting from the oblique collision between the Philippine Sea plate and the continental margin of the Asiatic plate, with a continuous stress causing the density of earthquakes and faults. The continuous observations of soil radon for earthquake studies have been recorded and are compared with the data from gamma rays observations. Some anomalous high radon concentrations and gamma-ray counts at certain times can be identified. A significant increase of soil radon concentrations was observed at Gukeng (GK), Chunglun (CL) and Pingtung (PT) station, and an increase in gamma-ray counts at the Chung Cheng University (CCUG) was also observed around two weeks before the Meinong Earthquake ( $M_L = 6.4$ , February 6, 2016) in southern Taiwan. The precursory changes in multi-parameters monitoring may reflect the preparation stage of a large earthquake. And, precursory signals are observed simultaneously that can conduce to expect the approximate location of the impending earthquake with high confidence. The continuous monitoring on the multiple parameters can improve our understanding of the relationship between the observed radon and gamma-ray variations and the regional crustal stress/strain in the area.

キーワード : radon、gamma rays、Meinong Earthquake

Keywords: radon, gamma rays, Meinong Earthquake

## Thermal InfraRed satellite surveys over Japanese seismic area applying Robust Satellite Techniques on MTSAT observations

\*Nicola Genzano<sup>1,2</sup>, Carolina Filizzola<sup>3</sup>, Katsumi Hattori<sup>2,4</sup>, Mariano Lisi<sup>1,4</sup>, Rossana Paciello<sup>3</sup>, Nicola Pergola<sup>3</sup>, Valerio Tramutoli<sup>1,3,4</sup>

1.School of Engineering, University of Basilicata, Potenza, Italy , 2.Graduate School of Science, Chiba University, Chiba, Japan, 3.Institute of Methodologies for Environmental Analysis of the National Research Council, Tito Scalo (PZ), Italy, 4.International Space Science Institute, Beijing, China

Since 2001, the general change detection approach, named Robust Satellite Techniques (RST), has been applied to explore the fluctuations of Earth's thermally emitted radiation, observed by satellite sensors operating in the thermal infrared (TIR) spectral range in possible relationship with the preparation phases of major earthquakes. Used in combination with RETIRA (Robust Estimator of TIR Anomalies) index, RST data analysis approach showed good ability to discriminate anomalous TIR signals possibly associated to seismic activity, from the normal variability of TIR signal due to other causes (e.g. meteorological).

Up to now, RST has been implemented on different TIR satellite sensors on board polar (NOAA and EOS) and geostationary (like, MSG, GOES, GMS and MTSAT) platforms, to investigate the preparation phases of earthquakes of different magnitudes occurred in several seismogenic areas around the world (e.g. Italy, California, Greece, Turkey, Taiwan, etc.).

In this paper, the RST data analysis approach has been implemented on TIR satellite records collected over Japan by the geostationary satellite sensor MTSAT (Multifunctional Transport SATellites). RETIRA index was used to identify Significant Sequences of TIR Anomalies (SSTAs) on a long observation period. Significance of the correlation existing among SSTAs and earthquakes (with  $M \geq 4$ ) occurrence was investigated in order to evaluate the possible contribute of such observations to a multi-parametric t-DASH (time-Dependent Assessment of Seismic Hazard) system for short-term seismic hazard forecasting.

Keywords: Earthquakes, TIR anomalies, RST analysis, Precursor, t-DASH

Spatiotemporal characteristics of the geomagnetic diurnal variation anomalies prior to the 2011 Tohoku earthquake (Mw9.0)

Spatiotemporal characteristics of the geomagnetic diurnal variation anomalies prior to the 2011 Tohoku earthquake (Mw9.0)

\*Han Peng<sup>1,3</sup>, Hattori Katsumi<sup>1</sup>, Huang Qinghua<sup>2</sup>

\*Peng Han<sup>1,3</sup>, Katsumi Hattori<sup>1</sup>, Qinghua Huang<sup>2</sup>

1.Department of Earth Sciences, Graduate School of Science, Chiba University, 2.Department of Geophysics, School of Earth and Space Sciences, Peking University, Beijing, China, 3.Institute of Statistical Mathematics, Tokyo, Japan

1.Department of Earth Sciences, Graduate School of Science, Chiba University, 2.Department of Geophysics, School of Earth and Space Sciences, Peking University, Beijing, China, 3.Institute of Statistical Mathematics, Tokyo, Japan

Xu et al., 2013 and Han et al., 2015 have reported unusual behaviors of geomagnetic diurnal variation (GDV) in the vertical component prior to the 2011 off the Pacific coast of Tohoku earthquake (Mw 9.0). To make a better understanding of this phenomenon, temporal-spatial analyses of GDV have been applied in this study. Geomagnetic data of long-term observations at 17 stations in Japan have been analyzed using the same method in Han et al. 2015. Ratios of diurnal variation range between the reference station KAK and the target stations have been computed. After removing seasonal variations, the 15-day mean values of the ratios in the vertical component shows a clear anomaly exceeding the statistical threshold about 2 months before the mega event at both ESA and MIZ stations in the Tohoku Region. Locations of anomalies in spatial distribution show a good correlation with the epicenter of the Mw 9.0 earthquake. These spatiotemporal results are consistent with those obtained from other independent observations such as groundwater level and GPS displacements. The coupling of multiple pre-earthquake phenomena may help to understand the preparation process of a mega earthquake in the subduction zone.

キーワード : seismo-magnetic phenomena、anomalous geomagnetic diurnal variation、coupling of multiple pre-earthquake phenomena、the Tohoku earthquake

Keywords: seismo-magnetic phenomena, anomalous geomagnetic diurnal variation, coupling of multiple pre-earthquake phenomena, the Tohoku earthquake



## Ionospheric anomalies instantly before three large earthquakes in Chile detected with GPS observations

\*Liming He<sup>1,2</sup>, Kosuke Heki<sup>2</sup>

1.Institute for Geo-informatics & Digital Mine Research, College of Resources and Civil Engineering, Northeastern Univ., China, 2.Department of Earth and Planetary Sciences, Hokkaido Univ., Japan

In this work, the ground-based permanent GPS stations were used to study ionospheric total electron content (TEC) response to three large earthquakes in Chile: the Mw8.3 Illapel earthquake of 16 September 2015, the Mw8.2 Iquique earthquake of 01 April 2014, and the Mw8.8 Maule earthquake of 27 February 2010. The GPS arrays around the epicenters provide rare opportunities to investigate the comprehensive near-field preseismic TEC responses to three huge earthquakes in South America. Based on the GPS absolute VTEC technique and Akaike's information criterion (AIC) method, the spatial distribution of ionospheric anomalies have been analyzed for the first time, especially in the height direction. The results showed that the positive anomalies occurred at an altitude of ~200 km, while the negative anomalies occurred at an altitude of ~350 km for the large earthquakes in the south hemisphere. The negative anomalies have a larger distribution than positive anomalies. A well consistency exists between the observation and the simulation result from C.L. Kou *et al.* (2014). The distribution of both positive and negative anomalies were mainly controlled by the geomagnetic field and magnetic latitude of epicenter. Moreover, we analyzed the VTEC variations during non-seismic activity period, and compared the VTEC changes originated from strong seismic activity with the VTEC changes induced by geomagnetic storm.

Acknowledgements: This study was funded by China Scholarship Council (CSC) and partially funded by the National Natural Science Foundation of China (grant no. 41104104). We thank C. Vigny (ENS) for providing GNSS data in Chile of his group. We thank the Argentine national geographic institute (IGNA) for providing GPS data of RAMSAC network, and the Brazilian Institute for Geography and Statistics (IBGE) for providing GPS data of RBMC network. We thank IGS ([www.igs.org](http://www.igs.org)) and UNAVCO ([www.unavco.org](http://www.unavco.org)) for making GNSS data available.

Keywords: GPS TEC, large earthquake, preseismic anomaly, spatial distribution

## Modification of Ionosphere before Large Earthquakes- Report of Ionosphere Precursor Study Task Group

\*Koichiro Oyama<sup>1,2</sup>, R Ryu<sup>4</sup>, C.H. Chen<sup>5</sup>, L Bankov<sup>8</sup>, D Minakshi<sup>3</sup>, H Liu<sup>2,7</sup>, J.Y. Liu<sup>6</sup>, T Kodama<sup>9</sup>

1.Plasma and Space Science Center,National Cheng Kung University, 2.International Center for Space Weather Study and Education, Kyushu University, 3.Physics department, Gauhati University, Assam, India , 4.Satellite Technology Research Center, Korea Advanced Institute of Science and Technology, Daejeon, Republic of Korea, 5. Department of Earth Science, National Cheng Kung University, Tainan, Taiwan, 6.Institute of Space Science, National Central University, Chung-Li, Taiwan, 7.Department of Earth and Planetary Sciences, Kyushu University, Fukuoka, Japan, 8. Bulgarian Academy of Sciences, Sofia, Bulgaria, 9.Japan Aerospace Exploration Agency, Tsukuba, Japan

The current status of ionospheric precursors associated with large earthquakes (EQs) is summarized in this paper as an outcome of a joint endeavor of the "Ionosphere Precursor Study Task Group," which was formed with the support of the Mitsubishi Foundation in 2014-2015. The group aims to promote the study of ionosphere precursors to EQs by trying to provide new findings, to prepare for a future EQ-dedicated satellite constellation, which is essentially needed to study the global morphology of ionosphere precursors, and to determine whether short term EQ prediction is possible. The first part of the manuscript reviews the ionosphere precursors that have been reported previously. Problems and specific research subjects that have become clearer from our one-year project are described. Satellite missions that are planned or are going to be launched soon for EQ studies are briefly described in the final part of the manuscript.

Keywords: ionosphere, earthquake, wave

## Theoretical Simulations of Electric Current Effects on the Ionospheric Plasma Structure

\*Charles Lin<sup>1</sup>, Jann-Yenq Liu<sup>2</sup>, Chuan-Ping Lein<sup>1</sup>, Chia-Hung Chen<sup>1</sup>

1.Department of Earth Science, National Cheng Kung University, 2.Institute of Space Science, National Central University, Chung-Li, Taiwan

Recent studies show ionospheric plasma density modifications due to lithosphere and atmosphere activities. One of the possible mechanisms for the ionosphere modifications might be direct current transmission effect to the ionospheric dynamo region. On the other hand, the disturbances could also affect the ionosphere by generating atmospheric disturbance waves that modify the neutral winds and thus affect the ionospheric dynamo and electron density. In this study, simulations of the direct current and disturbance wind dynamo effects are carried out using a coupled three-dimensional global ionosphere electrodynamic model. Simulations carried out by inclusion of the upward/downward transmission of direct electric current at 85 km altitude with various areas of current injections, indicate negative/positive TEC effects. The simulations for different local time sectors are also carried out showing that the effect is most prominent at dusk followed by that of at afternoon and noon periods. The simulations will also be compared with GPS-TEC observations of pre-seismic anomalies.

Keywords: Coupled Ionosphere Electrodynamic Simulation, Electric Current, Pre-seismic Ionosphere Anomalies

## Co-rupture, quasi-coseismic, and post-seismic EM fields generated by the rupture process of a finite fault embedd in a porous medium

\*Hengxin Ren<sup>1</sup>, Qinghua Huang<sup>2</sup>, Xiaofei Chen<sup>1</sup>

1.Sch. Earth Space Sci., Uinv. Sci. Tech. China, Hefei 230026, China, 2.Dept. Geophysics, Peking Univ., Beijing 100871, China

The electrokinetic effect related with the electric double layer between rock and fluid is one of the most possible generation mechanisms of earthquake-related electromagnetic (EM) signals. Previous numerical simulation studies of earthquake-related EM signals have indicated that the electrokinetic effect is able to generate co-rupture and coseismic EM fields as well as post-seismic electric fields. However, the amplitudes of the simulated co-rupture EM signals are under the natural EM noise levels. This means they are unobservable. Thanks to the improvement in the instrument and approach applied in the field observation of EM anomalies, reports on the co-rupture electric or magnetic signals finally appeared in recent years although such reports are very rare. Quasi-coseismic EM signals which are synchronous with seismic arrival have also been recorded in field observation. According to previous simulations on the electrokinetic effect, they are thought to be the coseismic EM fields, which are local responses to the seismic arrivals in a porous medium. In this study, we carry out numerical simulations of the electrokinetically coupled seismic and EM wavefields generated by a finite fault in a layered model consisting of porous and solid materials. Results confirm that the electrokinetic effect does can generate observable co-rupture EM signals, and the observability depends on the epicentral distance, properties of the medium where the fault is located, and local EM noise levels. It is shown quasi-coseismic EM signals can be generated even if the top layer, which is above the ground water level, is assumed to be a solid layer. The quasi-coseismic EM signals at least are partially contributed by the evanescent EM waves generated at the shallow subsurface interfaces. The evanescent EM waves are sensitive to the properties of the shallow subsurface fluid. Besides the radiation EM waves of interface response, the evanescent EM waves possibly also have some potential applications associated with the shallow subsurface fluids. Our results also show that electrokinetic effect can generate post-seismic electric and magnetic fields. They are presumably induced by the low-frequency fluid diffusion after the earthquake. The post-seismic magnetic field has not been identified in previous simulations on the electrokientic effect, because its generation requires a sufficiently strong medium heterogeneity, which the uniform porous half-spaced utilized in previous simulations cannot provide. Further studies on the evanescent EM waves and the EM fields associated with the fluid diffusion caused by the stress change may provide a better understanding and interpretation of the earthquake-related EM signals.

*Acknowledgements: This study is supported by the National Natural Science Foundation of China (Grant Nos. 41274054, 41274075 and 41274053).*

**Keywords:** co-rupture EM signals, quasi-coseismic EM signals, post-seismic EM fields, electrokinetic effect, rupture process of a finite fault

## National center of earthquake prediction experiment in China

\*Qinghua Huang<sup>1</sup>, Xiaodong Zhang<sup>2</sup>

1.Peking University, 2.Institute of Earthquake Science, CEA

China is one of the countries which have the earliest reports on earthquake-related phenomena. There are about 50-year continuous observation data in China up to now, which provides a valuable database for earthquake-related study. China is also a pioneer country for empirical earthquake prediction. Therefore, earthquake prediction experiment in China would be interested broadly by international communities of geosciences.

Although there had been some earthquake prediction experiments in China about 20 years before, due to the great debates in earthquake prediction and the discontinuity of funding support, all these earthquake prediction experiments are not on operation at the current stage. After the 2008 Ms8.0 Wenchuan earthquake in Sichuan, China, the Chinese government evaluated the situation of earthquake prediction and hazard mitigation. As the national agency of earthquake study, China Earthquake Administration (CEA) established the national center of earthquake prediction experiment in 2015, including sub-centers in Yunnan and Sichuan. The supporting institution of national center is Institute of Earthquake Science, CEA. The national center will provide an open, cooperative, dynamic platform for earthquake prediction research. We will summarize the main goal and task of the national center of earthquake prediction experiment in Yunnan and Sichuan, China. This study is supported by the National Natural Science Foundation of China (41574104).

Keywords: Earthquakes, prediction experiment, seismic hazard

## A Summary of iSTEP (integrated Study and Test of Earthquake Precursor) projects

\*Jann-Yenq Liu<sup>1</sup>, Yi-Ben Tsai<sup>2</sup>, Chieh-Hung Chen<sup>3</sup>, Yuh-Ing Chen<sup>4</sup>

1.Institute of Space Science, National Central University, Taiwan, 2.Department of Earth Sciences, National Central University, Taiwan, 3.Department of Earth and Environmental Sciences, National Chung Cheng University, Taiwan, 4.Institute of Statistics, National Central University, Taiwan

After the 21 September 1999 M7.6 devastating earthquake, a program entitled the integrated Search for Taiwan Earthquake Precursor (iSTEP-1, 2002/4/1–2006/3/31), which consists of a main project and five sub-projects, was conducted to search credible precursors in seismological variations, geomagnetic and gravity fields, ground surface deformations, and ionospheric electron density anomalies, as well as to evaluate the statistical significance of observed precursors in Taiwan. Results reveal that anomalies in P-wave velocity, ground surface deformation, geomagnetic field intensity, ionospheric electron density could appear few years, months, and days before large earthquakes in Taiwan, respectively. An integrated ground-based seismo-electromagnetic observation system, including eight networks of magnetometers, electrode arrays, corona probes, FM tuners, Doppler sounding systems, ionosondes, GPS receivers, and all sky cameras, has been constructed and routinely operating to monitor earthquake precursors in the lithosphere, atmosphere, and ionosphere and to find possible lithosphere-atmosphere-ionosphere coupling in the Taiwan area. Several statistical analyses were developed to validate the observed anomalies to be credible precursors. Due to its worldwide availability, the statistical results showed that the ionospheric total electron content (TEC) derived by ground-based GPS receivers were most likely to be a credible precursor. Succeeding the iSTEP-1, the iSTEP-2 (integrated Study for Taiwan Earthquake Precursors, 2006/8–2012/7) project adding with satellite observations was conducted to have a longer time period for data collection and analysis, as well as to develop physical and statistical models. Although it was not officially funded but supported by basic ionospheric research projects, the integrated ground-based observation still has been operating uninterruptedly. Many new observations possibly related to seismo-lithospheric precursors of the earth's surface magnetic field and the GPS surface deformation, seismo-atmospheric precursors of the infrasound signal, and seismo-ionospheric precursors (SIPs) in the electron density profile, the electron temperature, ion density, and neutral temperature probed by satellites were reported. The TEC in the global ionosphere map (GIM) routinely published (with a 2- or 4-day time delay) allows us to monitor temporal SIPs at a specific location, and to conduct spatial analysis discriminating the observed SIPs from global effects, such as solar flares, magnetic storms, etc. Statistical analyses for detecting both temporal and spatial precursors in the ionospheric TEC are developed. Meanwhile, ionospheric model simulations are also introduced to find causal mechanisms explaining the observed SIPs. The iSTEP-3 (integrated Study for Taiwan Earthquake Precursors, 2012/8–2016/7), which is proposed to focus on the SIP study, consisting of a main project and three sub-projects is formally funded. The main project continues to operate the integrated ground-based observation system, develops physical models, and compares model simulations with observed precursors, while the three sub-projects aim to develop a near real-time GIM with a 4-hour time delay for worldwide SIP monitoring, to monitor lithosphere, atmosphere, and ionosphere precursors, to find the precursor link, and to conduct earthquake hazard assessment with observed precursors, respectively.

Keywords: iSTEP, earthquake prediction, earthquake precursor, total electron content, GPS TEC

## Earthquake-induced electromagnetic field due to electrokinetic effect

\*Yongxin Gao<sup>1</sup>, Hengshan Hu<sup>2</sup>, Xiaofei Chen<sup>3</sup>

1.School of Civil Engineering, Hefei University of Technology, Hefei, China, 2.Department of Astronautics and Mechanics, Harbin Institute of Technology, Harbin, China, 3.School of Earth and Space Sciences, University of Science and Technology of China, Hefei, China

Electromagnetic fields generated by earthquake events were usually reported and have drawn a lot of attentions. They can be detected before, during and after the seismic arrivals after earthquake rupture started, and are referred to as the co-rupture, coseismic and post-seismic EM signals, respectively. The co-rupture EM signal is of great importance since it arrives earlier than the seismic waves, especially the destructive shear and surface waves and has potentials in earthquake early warning and hazard reduction. The coseismic EM signal arriving simultaneously with the seismic waves are also valuable since it contains the information of the subsurface medium in the vicinity of the EM sensors. However, how these kind EM signals are generated is still controversial. Several possible mechanisms have been proposed to explain the earthquake-induced EM signals, e.g., the electrokinetic effect, the piezoelectric effect, the motional induction effect, etc.

In this study, we present the theoretical simulations of the earthquake-induced EM signals on the basis of the electrokinetic effect. This result shows that due to the electrokinetic effect the earthquake can generate co-rupture EM signal, which arrives immediately after the onset of the earthquake and much earlier than the seismic arrivals. It arrives at different EM sensors simultaneously. The earthquake can also generate coseismic EM field which arrives simultaneously with the seismic waves. Besides, our simulations indicate that when the earthquake fault rupturing stops and the seismic waves pass far away, the magnetic field vanishes while the electric field near the fault remains, decaying slowly and lasting for hundreds of seconds. The near-fault coseismic electric fields hold similar features to some field observations in literature. We apply our theoretical simulations to explain the coseismic EM data observed during the 2004  $M_w$ 6 Parkfield earthquake. By using a finite fault source model obtained via kinematic inversion, we calculate the electric and magnetic responses to the earthquake rupture are calculated. The result shows that the synthetic electric signals agree with the observed data for both amplitude and wave shape, especially for early portions of the records after the earthquake. Our simulations supports the electrokinetic effect as the reasonable mechanism for the generation of the earthquake-induced electric fields.

This work is supported by the National Natural Science Foundation of China (grants 41474038 and 41204039).

Keywords: earthquake, electromagnetic fields, electrokinetic effect

## 四成分歪計(SKZ-1)による前兆的変動の検出

Detection of precursory anomalies using the four -component borehole strain meter (SKZ-1)

孔 向陽<sup>1</sup>、蘇 凱之<sup>2</sup>、\*藤縄 幸雄<sup>3</sup>、野田 洋一<sup>4</sup>Xiangyang Kong<sup>1</sup>, Kaizhi Su<sup>2</sup>, \*Yukio Fujinawa<sup>3</sup>, Yoichi Noda<sup>4</sup>

1.中国山東省地震局、2.中国地殻応力研究所、3.株式会社ミエルカ防災、4.有限会社テラテクニカ

1.Earthquake Administration of Shandong Province, China, 2.Institute of Crustal Dynamics, CEA, China, 3.Mieruka Bousai LtdEarthquake Administration of Shandong Province, China, 4.Tierra Tecnica

High sensitive crustal monitoring has a long history to investigate anomalous precursory variations of earthquakes by means of several kinds of sensors as borehole volumetric sensors (Sacks and Evertson,1971), borehole extension sensor by Gladwin (1984), three component volumetric strain meter by Sakata (2004) and Ishii and Yamauchi (2007). In China the four component strain meter with high performance was developed by Su Kaichi (1977) and has been used in earthquake-prone provinces since 2006. The configuration of four sensing units at intervals of 45 degree provides a simple indicator (consistent factor) of the sensor functioning and regime of the crust assumed to be plain strain in normal state to detect candidates of anomalous variation without little ambiguities. The observation at ten sites in several provinces of China for some 10 years has proved profitable performance of the sensor: high stability and high degree of resolution to detect local and regional anomalous variations near hypocenter. In the normal stage the variations consist of steady diurnal variations due to earth tide, steady trends due to the crustal stress adjustment after construction of the borehole, and installment of the sensors. There are little urban noises with the result of the consistent factor being almost constant value of 0.99.

Here we present analyses of anomalous variations detected by use of the correlation coefficient of two independent plain strain components before two major earthquakes near the network: Yiliang M5.7 earthquake and LuDian M6.5 earthquake. In the imminent sage of the Yiliang earthquake, obvious strain anomalies with periods of several days, several weeks appeared simultaneously in four components at the nearest Yiliang site of the epicenter distance 15.5km. The correlation coefficients for those anomalies are well below reaching 0.2 compared with the ordinal value 1.0. At DaGuan site of larger distance 30km, there appeared no significant anomalies with the factor remaining the normal value near 0.99 or so. Analyses show that the correlation coefficient can be used to objectively detect anomalies to define the successive stage of earthquake occurrence from normal to relaxation stages.

A multiple observations using the four component strain meters, groundwater meters and electromagnetic sensor are expected to substantially contribute to investigation of the nucleation process of natural earthquakes. Present finding may contribute to efficient data analysis to detect candidate of anomalies from using big amount of continuous multiple data with higher sampling rate.

キーワード：歪計、地震前兆現象、検出方法

Keywords: strain meter, pre-seismic anomalies, detection method



## 大気用ラドン検出器の開発

## Development of radon detector for atmosphere

\*蜷川 清隆<sup>1</sup>、山本 勲、岡林 徹<sup>2</sup>\*Kiyotaka Ninagawa<sup>1</sup>, Isao Yamamoto, Tohru Okabayashi<sup>2</sup>

1.岡山理科大学理学部応用物理学科、2.千葉科学大学危機管理学部医療危機管理学科

1.Department of Applied Physics, Okayama University of Science, 2.Department of Medical Risk and Crisis Management, Chiba Institute of Science

1995年の兵庫県南部地震では西宮市地下水中ラドン濃度の上昇<sup>1</sup>や大気中ラドン濃度の上昇（神戸薬科大学）<sup>2</sup>があったと報告されている。また、東北地方太平洋沖地震では、「福島医科大学（福島市）の放射線施設内の排気モニターのデータが地震前のピークはピーク期間が長く、急激に減少した後、地震が発生した。」と報告されている<sup>3</sup>。

私達は倉敷鉦山坑内、千葉県において空気中のラドン濃度の連続観測を行っている。倉敷では、家庭用ラドン測定器SUN NUCLEAR CorporationのRadon Monitor, Modelを、千葉ではPylon社PMT-TEL静電捕集型低レベルラドンガス検出器（以後TELと略す）を用いている。TELはZnS(Ag)シンチレータと光電子増倍管から構成されている。しかし、 $\alpha$ 線を検出しているにも関わらず、その出力は連続スペクトルとなっている。その為、計数はディスクリレベルに依存し、カウントのシフトが起こることがある。他方、PINフォトダイオードは高感度ラドン検出器として開発され、スーパーカミオカンデにおいて使われてきている<sup>4</sup>。今回我々は、PINフォトダイオードを用いて、空気中のラドンを検出するラドン検出器を製作した。

PINフォトダイオードとして浜松ホトニクス社の未封止S3204-09を使用した。空気容器としてステンレス鍋、チャージ増幅器としてH4083、小型高圧電源モジュールとしてC4900-01、波形整形増幅器としてクリアパルス社の4419型、マルチチャンネルアナライザーとしてラボラトリーイクイップメント社のMCA-Lite、そして測定データ保存表示用にパソコンを使って、ラドン検出システムを製作した。マルチチャンネルアナライザーの出力は、鉦物ウランからラドン娘核種の<sup>218</sup>Po and <sup>214</sup>Poの明確なアルファ線ピークを検出した。このピークは大きなピークシフトを示したが、白いセラミックの表面をカーボンテープで覆うことで克服した。このシステムにシリカゲルで除湿した大気を導入したところ、同じラドン娘核種のピークを検出し、強度の日変化を観測することができた。

## 参考文献

- 1) G. Igarashi, T. Saeki, N. Takahata, Y. Sano, K. Sumikawa, S. Tasaka, Y. Sasaki, M. Takahashi: Groundwater radon anomaly before the Kobe earthquake, *Science*, 269, 60-61, 1995
- 2) Yasuoka, Y. and Shinogi, M.: Anomaly in atmospheric radon concentration: a possible precursor of the 1995 Kobe, Japan, earthquake. *Health Physics*, 72, 759-761, 1997
- 3) 長濱裕幸, 安岡由美, 鈴木俊幸, 本間好: 東北地方太平洋沖地震(MW=9.0)前の大気中ラドン濃度異常について. *日本地震学会講演予稿集*, A32-09, 2011
- 4) 根本真知子, 田坂茂樹, 堀秀充, 奥村公宏, 梶原隆章, 竹内康雄: 静電捕集型超高感度空気中ラドン検出器の開発, *RADIOISOTOPES*, 46, 710-719, 1997.

キーワード: ラドン検出、大気、地震

Keywords: Radon detection, atmosphere, earthquake

Observational study of atmospheric electricity parameters(atmospheric electricity field (AEF), atmospheric ion concentration (AIC), and radon concentration) at Asahi, Boso Peninsula, Japan

Observational study of atmospheric electricity parameters(atmospheric electricity field (AEF), atmospheric ion concentration (AIC), and radon concentration) at Asahi, Boso Peninsula, Japan

\*大村 潤平<sup>1</sup>、Han Peng<sup>2</sup>、吉野 千恵<sup>2</sup>、服部 克巳<sup>2</sup>、下 道國<sup>3</sup>、小西 敏春<sup>4</sup>

\*Junpei Omura<sup>1</sup>, Peng Han<sup>2</sup>, Chie Yoshino<sup>2</sup>, Katsumi Hattori<sup>2</sup>, Michikuni Shimo<sup>3</sup>, Toshiharu Konishi<sup>4</sup>

1.千葉大学理学部地球科学科、2.千葉大学大学院理学研究科、3.藤田保健衛生大学、4.応用光研工業株式会社  
1.Department of Science, Chiba University, 2.Graduate School of Science, Chiba University, 3.Fujita Health University, 4.OHYO KOKEN KOGYO CO.,LTD.

The total electron content anomaly preceding the large earthquake is one of the most promising precursory phenomena in the upper atmosphere. Lithosphere-Atmosphere-Ionosphere coupling (LAI coupling) model has been proposed to explain the earthquake-related phenomena in the atmosphere and ionosphere. We evaluate the possibility of chemical channel of LAI coupling through the monitoring of atmospheric electricity parameters such as the atmospheric electricity field (AEF), atmospheric ion concentration (AIC), and radon concentration. In this paper, we will report about the property of atmospheric electricity parameters observed at Asahi station (ASA), Boso Peninsula, Japan. AIC, AEF, atmospheric radon concentration, radon exhalation quantity from the ground, and weather elements have been observed at ASA. First, we compare seasonal variation, daily variation, and response to precipitation of atmospheric electric parameter observed at ASA and those at Kiyosumi station (KYS).

Variations of AIC and AEF before precipitations are quite similar at both stations; AIC increases quickly when a precipitation starts and AEF begins to be disturbed three hours before rain starts. But the variations after stopping precipitation have individual properties. Both parameters keep high values for a few hours at ASA and it takes longer than KYS to back to the normal level. Daily variation in each season also differs in each site. In summer, AIC takes minimum value at 15:00 LT. in the daily variation at ASA. But at KYS, it takes maximum value at 15:00 LT. In winter, AEF decreases from 09:00 LT to noon and gradually increases in daily variation. In other seasons, it takes maximum value at 20:00 LT and fluctuated in relatively large range. Daily variation of AEF in winter is mostly similar to the typical daily variation at KYS for all season.

Radon exhalation quantity variation has a clear negative correlation with 3 hours delay to the air pressure variation. Each season differs in daily pattern. AIC and AEF variations show lag correlation with radon exhalation quantity variation. To extract anomalous radon variation related to earthquakes, we should set a network of Radon monitoring and establish a model of radon variation for the future detailed analysis.

キーワード：Lithosphere-Atmosphere-Ionosphere coupling、atmospheric ion concentration、atmospheric electricity field、Radon exhalation quantity

Keywords: Lithosphere-Atmosphere-Ionosphere coupling, atmospheric ion concentration, atmospheric electricity field, Radon exhalation quantity

Multi-parameter satellite geochemistry for validation of atmospheric pre-earthquake signals associated with major seismicity. Case study for Xinjiang, China and Baja, California

\*Dimitar Ouzounov<sup>1</sup>, Yeju Cui<sup>1,2</sup>, Nikolaos Hatzopoulos<sup>1</sup>

1.Center of Excellence in Earth Systems Modeling & Observations (CEESMO) , Schmid College of Science & Technology Chapman University, Orange, California, USA, 2.Institute of Earthquake Science, China Earthquake Administration, Beijing, China

We are presenting the development of satellite geochemistry for multi-sensor validation of short-term atmospheric phenomena preceding major earthquakes. The purpose of this study is to explore the synergetic physical link between (1) satellite thermal infrared radiation (STIR) with anomalous distribution main trace gases : (2) Carbon dioxide (TCCO<sub>2</sub>), (3) Ozone (TCO<sub>3</sub>), (4) Methane (TCCH<sub>4</sub>) and (5) carbon monoxide (TCCO), associated with major seismicity. The science rationale for multidisciplinary analysis is based on concept Lithosphere-Atmosphere-Ionosphere Coupling (LAIC) (Pulinets and Ouzounov, 2011), which is based on the gas emission from the lithosphere during the earthquake generation and explains the synergy of different processes and anomalous variations, usually named short-term pre-earthquake anomalies. We analyzed retrospectively several major earthquakes in two deferent seismo-tectonic regions: XinJiang province in China and in Baja, California including M7.2 of March 20, 2008 in China and M7.3 of April 10, 2010 in Baja by systematically analyzing multi-sensor satellite atmospheric chemistry and ground temperature/humidity observations. Meteorological satellite data include NOAA POES and AQUA/AIRS polar orbit satellites. In both cases satellite data shows (STIR, TCCO<sub>2</sub>, TCO<sub>3</sub>, TCCH<sub>4</sub>, TCCO) building atmospheric anomalies 1-20 days before the main shock. This probably is connected with enhances of the degassing rate of the lithosphere, which can provide additional source for flux emission near major faults in the area. The hourly in-situ atmospheric observation show similarly in the air temperature increases and drop in the relative humidity, probably as result of additional atmospheric ionization observed before the three earthquake events. Our initial results suggest that systematic use of multi-parameter satellite geochemistry can be used for additional physical validation of pre-seismic processes associated with the major earthquake events.

Keywords: earthquake precursor, forecasting, satellite, geochemistry, radon

A statistical investigation of z test on seismo-ionospheric anomalies in TEC associated earthquakes in Japan during 1999-2014

\*AiLing Shih<sup>1</sup>, Jann-Yenq Liu<sup>1</sup>

1.National Central University

Statistical analysis on seismo-ionospheric precursors (SIP) by using global ionosphere map (GIM) of the total electron content (TEC) in associated with 188  $M \geq 6.0$  earthquakes in Japan during 1999-2014. Various references days of -15,  $\pm 7$ ,  $\pm 15$ ,  $\pm 30$  days to the earthquake are employed to find characteristics of SIP. Results show that both decrease (or negative) and increase (or positive) anomalies in the GIM TEC before the earthquakes are further examined by z test. The receiver operating characteristic curve is also applied to see whether the SIPs exist in Japan.

Keywords: earthquake, ionosphere

## 3D Structure of Ionospheric Disturbances Related to Large Earthquakes

## 3D Structure of Ionospheric Disturbances Related to Large Earthquakes

\*Yagmur Mustafa<sup>1</sup>, Hirooka Shinji<sup>1</sup>, Hattori Katsumi<sup>1</sup>

\*Mustafa Yagmur<sup>1</sup>, Shinji Hirooka<sup>1</sup>, Katsumi Hattori<sup>1</sup>

1.Chiba University

1.Chiba University

In this paper we have investigated the geomagnetic storms and Earthquake-related ionospheric disturbances. Following geomagnetic storms, the ionospheric peak electron density ( $N_{max}$ ) and total electron content (TEC) often increase or decrease very much from their quiet-time levels. These increase/decrease are known as positive and negative ionospheric storms. This paper deals with some extremely significant geomagnetic and Earthquake-related events in between 2000 and 2013 which involving positive and negative ionospheric variations having immense importance to space weather, with reference to TEC maps derived from a dual-frequency GPS receiver network (GEONET: GPS Earth Observation Network) built by the Geospatial Information Authority of Japan (GSI), as well as foF2 and hmF2 (maximum electron density height) derived from four ionosonde observatories in Japan and GNSS-RO data from COSMIC mission of NOAA/NSPO(USA-Taiwan joint mission). For comparison and discrimination of stormy and large Earthquake days, a 3D Structure of Ionosphere will be discussed in the presentation.

キーワード : Tomography、 Ionospheric Disturbances、 Geomagnetic Storms、 Earthquakes、 TEC

Keywords: Tomography, Ionospheric Disturbances, Geomagnetic Storms, Earthquakes, TEC

## Assessment of Ionospheric TEC anomaly before large earthquake: Elimination of geomagnetic storm effects

\*Katsumi Hattori<sup>1</sup>, Peng Han<sup>1</sup>, Shinji Hirooka<sup>1</sup>

1.Department of Earth Sciences, Graduate School of Science, Chiba University

The detection of electromagnetic perturbations prior to large earthquakes has been proposed as a useful way to monitor the crustal activities. One of the most promising candidates is the measurement of Total Electron Content (TEC). There have been many reports on TEC anomaly associated with large earthquakes from different parts of the world. To verify the relation between TEC anomalies and seismicity around Japan, statistical studies by superposed epoch analysis have been carried out. The results have indicated that before a M>6 earthquake there are clearly higher probabilities of positive TEC anomalies in Japan. These results indicate the correlation between TEC anomalies and sizeable earthquakes. Furthermore, by making use of long-term TEC data over Japan during 2000-2013 and applying Molchan's error diagram, we can evaluate the optimal parameter for earthquake forecasting. The results show that the TEC data contain potentially useful information on earthquake forecasts.

Further research on earthquake forecasting and promoting its utilization will greatly contribute to disaster risk reduction. By using an interdisciplinary or integrated approach, which connects science with technologies related to the ongoing earthquake forecast researches such as ULF geomagnetic and GNSS methods, earthquake forecasting will be demonstratively realized.

Keywords: Ionospheric TEC anomaly, statistical studies, Molchan's error diagram

## Statistical Analysis on ULF magnetic anomaly and local seismicity around Kakioka, Japan

\*Rui Du<sup>1</sup>, Katsumi Hattori<sup>1</sup>, Peng Han<sup>1</sup>

1. Graduate School of Science, Chiba University

To clarify and verify the ultra-low frequency (ULF) seismo-magnetic phenomena, we have performed statistical studies on the geomagnetic data observed at the Kakioka (KAK) station, Japan, during 2001-2010. We investigated the energy of ULF geomagnetic signals of the frequency around 0.01Hz using wavelet transform analysis. To minimize the influences of artificial noises and global geomagnetic perturbations, we used only the geomagnetic data observed at nighttime (LT 2:30 am-4:00 am) and exclude the geomagnetic anomalies when the energy of horizontal component is large. Statistical results of superposed epoch analysis have indicated that ULF magnetic anomalies are more likely to appear before sizeable earthquake events ( $E_s > 10^8$ ) rather than after them, especially 6-10 days before the events.

Finally, we have evaluated the precursory information of ULF geomagnetic signals for local sizeable earthquakes using Molchan's error diagram. We also compared our results with previous statistical studies at KAK. The above results have indicated that the ULF seismo-magnetic phenomena at KAK clearly contain precursory information and have a possibility of improving the forecasting of large earthquakes.

Keywords: ULF seismo-magnetic phenomena, statistical study, superposed epoch analysis (SEA), Molchan's error diagram

## 地下水動態に起因した自然電位変動と自然電位トモグラフィー

The self-potential variation induced by groundwater flow and the self-potential tomography

\*山崎 智寛<sup>1</sup>、服部 克巳<sup>1</sup>、寺嶋 智巳<sup>2</sup>

\*Tomohiro Yamazaki<sup>1</sup>, Katsumi Hattori<sup>1</sup>, Tomomi Terajima<sup>2</sup>

1.千葉大学大学院理学研究科、2.京都大学防災研究所

1.Department of Earth Sciences Faculty of Science , Chiba University, 2.Disaster Prevention Research Institute, Kyoto University

Landslide is one of the most severe natural hazards in the world and there are two types; rainfall-induced landslides and landslides triggered by an earthquake. To understand rainfall-induced landslide process by the self-potential approach, we struggle with the integrated research to clarify the coupling among hydrological, geotechnical, and electromagnetic changes. Our final goal is to develop a simple technology for landslide monitoring/forecasting using self-potential method. The previous laboratory experiments show that the self-potential variation has a relationship with the ground water condition and soil displacements. So, in this paper, we first demonstrate the numerical computations on the self-potential variation by the simulated groundwater flow, and compare the result with those observed by laboratory experiments. In the result, the simulated self-potential variation is consistent with observed one.

Then, we developed self-potential tomography to estimate the ground water condition. And we also characterize the pressure from the self-potential data, and compare the result with observed pressure head that is measured by pore-pressure gauge and found that the inverted pressure head is consistent with observed one. In addition, we apply the self-potential data observed by the flume test. The estimated pressure head from observed self-potential data shows the consistency with observed pressure head. And estimated pressure head also show the characteristic distribution before the landslide occurred. These facts are highly suggestive in effectiveness of the self-potential tomography to monitor groundwater changes associated with landslide. The details will be given in our presentation.

キーワード：自然電位、斜面崩壊、トモグラフィー

Keywords: Self-potential, Landslide, Tomography



## A Mechanism Causing Temporal Variation in b-values Prior to a Mainshock

\*Jeen-Hwa Wang<sup>1</sup>

## 1. Academia Sinica

Observations exhibit the temporal variation in b-values prior to a mainshock. The b-value starts to increase from the normal value at time  $t_1$ , reaches its peak one at time  $t_2$ , then begins to decrease from the peak one at  $t_2$ , and returns to the normal one at time  $t_3$ . As  $t > t_3$ , the b-value varies around the normal one or rightly decreases with time until the occurrence of the forthcoming mainshock at time  $t_4$ . The precursor time,  $T = t_4 - t_1$ , of b-value anomalies prior to a forthcoming mainshock is related to the magnitude,  $M$ , of the event in a form:  $\log(T) = q + rM$  ( $T$  usually in days) where  $q$  and  $r$  are two constants. In this study, the mechanism causing b-value anomalies prior to a mainshock is explored. From numerical simulations based on the 1-D dynamical spring-slider mode proposed by Burridge and Knopoff (1967), Wang (1995) found a power-law correlation between  $b$  and  $s$ , where the parameter  $s$  is the ratio of the spring constant ( $K$ ) between two sliders to that ( $L$ ) between a slider and the moving plate. The power-law correlation are  $b \sim s^{-2/3}$  for the cumulative frequency and  $b \sim s^{-1/2}$  for the discrete frequency. Since  $L$  of a source area is almost constant for a long time period,  $b$  directly relates to  $K$ . Lower  $K$  results in a higher b-value. Wang (2012) found  $K = r_A v_p^2$ , where  $r_A$  and  $v_p$  are, respectively, the areal density and P-wave velocity of a fault zone. Experimental results show that  $v_p$  is strongly influenced by the water saturation in rocks. The water saturation in the source area varies with time, thus leading to a temporal variation in  $v_p$  as well as  $K$ . This results in the temporal variation in b-values prior to a mainshock. The modeled result is consistent with the observed one.

Keywords: b-value, precursor time, spring-slider model, stiffness ratio, saturation of water

## b値を用いた応力場変動予測と地震活動総合予測の試み

## Integrated earthquake forecast: combination of b-value monitoring and ionospheric precursors

\*小張 剛照<sup>1</sup>、韓 鵬<sup>1</sup>、服部 克巳<sup>1</sup>\*takaaki Kobari<sup>1</sup>, Pen Han<sup>1</sup>, Kastumi Hattori<sup>1</sup>

1. 千葉大学大学院理学研究科

1. Department of Earth Sciences, Graduate School of Science, Chiba University

近年、地震活動に先行する様々な電磁気現象が報告されており、その中でも電離圏総電子数(Total Electron content: TEC)の異常は、短期地震予測の有力な候補として知られている<sup>(1)</sup>。

一方、地圏では大地震に先行してゲーテンベルク・リヒター則に従うb値が本震付近において本震の数年前(場合によっては数十年スケール)から低下する現象が報告されている<sup>(2)</sup>。そこで本報告ではb値解析によって中期的に規模の大きな地震発生予測を行ってから、詳細な電磁気解析を行うスキームの有効性について、十勝沖をテストサイトとして調査した。本稿では2003年9月11日(Mj8.0)と2008年9月26日に発生した十勝沖地震(Mj7.1)を対象とし、地圏での応力場の変動(b値)と電離圏総電子数(GIM-TEC、GPS-TEC)の変動の調査結果をそれぞれ報告する。さらに、上記の事例研究をもとに地圏での応力場の時空間的変動をprospectiveな視点で千葉県房総周辺、南海トラフ、千島海溝を調査した結果について報告する。

キーワード：地震、電磁気、b値、電離層

Keywords: Earthquake, Electromagnetic, b-value, Ionosphere

Development of the quasi-real-time monitoring of volcanic lava activity using MODIS  
Development of the quasi-real-time monitoring of volcanic lava activity using MODIS

\*安 ビョンジン<sup>1</sup>、服部 克巳<sup>2</sup>、Nicola Genzano<sup>3</sup>

\*BYOUNGJIN AHN<sup>1</sup>, Katsumi Hattori<sup>2</sup>, Nicola Genzano<sup>3</sup>

1.千葉大学理学部地球科学科、2.千葉大学大学院理学研究科、3.University of Basilicata

1.Department of science, Faculty of Science, Chiba University, 2.Department of Earth Sciences, Graduate School of Science, Chiba University, 3.University of Basilicata

It is possible to quasi-realtime monitoring of volcanic lava activity could be possible if we can detect the thermal anomalies related to the exposure and lava dome of magma by satellite sensors such as MODIS. And it can be used to help for the volcano disaster prevention. In this study, we deal with seven volcanoes in Indonesia. First, we define the infrared radiation caused by the eruption and then, we use the statistical analysis for the radiation, and remove the cloud effects. Finally, we investigate the abnormal values against the background level of the temperature.

We introduce an evaluation function  $S$  to remove the spatial and temporal variation from the spatial difference of the brightness temperature data between the target point and reference point (5 km distance). When we compute the differences, we need to eliminate cloud effects adequately. To achieve this, we use the brightness temperature difference between bands of MODIS (BTD). In this study, we select the following combinations ; (1) Band34-Band35 ( $BTD(t) - \mu < k\sigma$ ,  $k=-2.0$ ), (2) Band31-Band27 ( $BTD(t) - \mu < k\sigma$ ,  $k=-2.6$ ), (3) Band31-Band32 ( $|BTD(t) - \mu| < k\sigma$ ,  $k=-3.0$ ), and (4) Band20-Band31 ( $|BTD(t) - \mu| < k\sigma$ ,  $k=-3.0$ ). Where  $t$ ,  $k$ ,  $m$ , and  $s$  are the season, threshold for cloud identification, average, standard deviation for each distribution of BTD. Until the distribution satisfy the equation, we repeat the test. Then, we move to the next test. We perform this procedure up to test 4. Then we get the pixels without cloud. The result is evaluated using LIDAR data onboard CALIPSO, which has the almost same orbit and constellated with AQUA. After removing the cloud effect, we compute the deviation rate  $d$ . As results for 15 years data analysis for 7 volcanoes in Indonesia, when the deviation rate exceeds in target volcanoes  $6\sigma$ , there is a tendency to have a lava volcanic activities. However, without removing the cloud effects, we find it is difficult to identify the anomaly related to the lava activities. Therefore, it is highly suggestive of the proposed method is valid for monitoring volcanoes and volcanic risk reduction.

キーワード : MODIS、火山、リモートセンシング

Keywords: MODIS, Volcano, Remote Sensing

## 房総半島を対象としたMT探査と予察的考察 (2)

## MT survey and its preliminary result at Boso Peninsula, Japan (2)

\*小泉 直輝<sup>1</sup>、陳 浩<sup>1</sup>、韓 鵬<sup>1</sup>、吉野 千恵<sup>1</sup>、服部 克巳<sup>1</sup>、奥田 真央<sup>2</sup>、菅野 倅太郎<sup>2</sup>、早川 美土里<sup>2</sup>、茂木 透<sup>2</sup>、坂中 伸也<sup>3</sup>

\*Naoki Koizumi<sup>1</sup>, Hao Cheng<sup>1</sup>, Peng Han<sup>1</sup>, Chie Yoshino<sup>1</sup>, Katsumi Hattori<sup>1</sup>, Mao Okuda<sup>2</sup>, Kotaro Sugano<sup>2</sup>, Midori Hayakawa<sup>2</sup>, Toru Mogi<sup>2</sup>, Shin'ya Sakanaka<sup>3</sup>

1.千葉大学大学院理学研究科、2.北海道大学大学院理学院、3.秋田大学大学院工学資源学研究科地球資源学専攻

1.Graduate School of Science, Chiba University, 2.Graduate School of Science, Hokkaido University, 3.Department of Earth Science and Technology, Graduate school of Engineering and Resource Science, Akita University

A magnetotelluric (MT) survey is one of the methods to understand the underground electric properties. In Boso area, Japan, there are three main topic to perform the MT survey; (1) to estimate underground resistivity structures related to the plate boundaries, seamount, asperities, and slow slip events; (2) to obtain a regional realistic resistivity structure for the numerical simulation in generation and propagation mechanisms of electromagnetic precursors, and (3) to develop a new MT technique to reduce the cultivated noises such as DC-driven train system and factories. For challenges to solve them, we decided to carry out the MT survey in Boso area, Japan during 2014-2016. Due to sensing down to 100 km depth, we used induction and fluxgate magnetometers. We set 41 and 12 sites for induction and fluxgate type magnetometers, respectively.

The preliminary 1-D inversion results for 41 induction sites show that we can presume apparent resistivity about 1 km - 10 km depth from the surface, but relatively not clear about 100 m - 1 km and 10 km - 100 km depth from the surface. In addition, we found that the noises tend to be weaker in the southern region compared to the northern region.

To presume resistivity structure in Boso Peninsula, it is necessary to remove the artificial noises from observed MT data. The observed noises have characteristics of transient signals and processes in time domain are required such as singular spectrum analysis. Moreover, we will analyze the observed data of 12 stations in which we used fluxgate type magnetometer to obtain lower frequency and deeper information.

キーワード：MT法、房総半島

Keywords: MT method, Boso Peninsula