

Estimate of crustal deformation around Azumayama Volcano by using SAR data

Daiki Muto¹, *Yoshiko Ogawa¹, Yasuhiro Hisada¹, Hirohide Demura¹, Satoshi Miura², Taku Ozawa³

1.The University of Aizu, 2.Graduate School of Science, Tohoku University, 3.National Research Institute for Earth Science and Disasters

Azumayama Volcano is located along the border of the Yamagata and Fukushima Prefecture. The volcanic alert level of Azumayama has been raised to Level 2 since Dec. 2014, which is the highest in the Fukushima prefecture. Level 2 means a probability of an eruption which can damage the area near the crater.

The Advanced Land observing Satellite2 (ALOS2) / Phased Array L-band Synthetic Aperture Radar (PALSAR2) observes the large area. The technique of interferometric SAR (InSAR) analysis can estimate the ground displacement with the cm-level resolution.

In this research, we examined a crustal deformation around Azumayama. We analyzed the ALOS2/PALSAR2 data observed from September 2015 to November 2016 using the technology of InSAR, comparing the results with the measurement from the 6 GNSS stations around Azumayama. If the crustal deformation obtained by the InSAR analysis of ALOS2/PALSAR2 data is consistent with the measurement by GNSS observation at the corresponding locations, we could integrate the two methods to estimate the crustal deformation of the whole area around Azumayama, spatially- and time-continuously which should complements each other.

As a result, we detected the local crustal deformation around Azumayama by InSAR. The crustal uplift had occurred at Oana crater through 2014/9/9-2015/6/2. No crustal deformation was observed from 2015/6/2 to fall 2015. The subsidence at the west of Azumayama since fall 2015 seemed to be detected for the first time by InSAR.

The InSAR estimates showed very good agreement with the GNSS observations within their errors except for a few cases where phase propagation delays through the ionosphere or troposphere should limit the accuracy of InSAR.

No GNSS station is located at the west of Azumayama. InSAR analysis can contribute to estimate the crustal deformation in the whole volcanic area. By integrating the two different methods of InSAR and GNSS, we would be able to monitor the deformations around Azumayama Volcano multi-dimensionally. It will be an important step toward prevention and/or mitigation of natural disaster.

Keywords: Mt. Azuma, crustal deformation, interferometric SAR, prevention and reduction of natural disaster

3-D deformation mapping by exploiting ALOS-2 InSAR from four different viewing directions -case of Sakurajima volcanic activity in 2015 -

*Yu Morishita¹, Tomokazu Kobayashi¹, Hiroshi Yarai¹

1.GSI of Japan

InSAR can measure surface displacement with high spatial resolution and precision, and has contributed to estimating underground crustal deformation caused by earthquakes and volcanic activities which is difficult to observe directly. One of the limitations of InSAR is its one dimensional measurement capability, i.e., change of distance between the satellite and the ground. Whereas three dimensional (3-D) displacement can be retrieved from multiple InSAR measurements acquired from three or more different viewing directions, it had been unlikely to occur because almost all of satellite SAR acquisitions were right-looking. Although combination with a pixel offset method or multiple aperture interferometry (MAI), which provide displacement along azimuth direction, has been applied to resolve 3-D deformation, it would sacrifice of an inherent capability of InSAR because spatial resolution and precision of a pixel offset method and MAI are lower than that of InSAR.

In Sakurajima, a lot of volcanic earthquakes occurred and extensive deformation was detected by tiltmeters, extensometers and continuous GNSS observations on 15 August 2015. In order to measure the deformation caused by the volcanic activity, emergency observations have been conducted by ALOS-2 shortly afterward. The observations were not only right-looking but also left-looking, resulting in InSAR results from four different viewing directions (i.e., ascending/descending and right-/left-looking) in just nine days.

We estimated 3-D deformation caused by the volcanic activity in Sakurajima and its errors using four interferograms acquired from different viewing geometry. Horizontal expansive displacement of 15 cm at maximum with northeast-southwest direction around Showa crater and uplift of 12 cm at maximum around southeast of Showa crater were detected. The estimated errors of east-west (EW), north-south (NS) and up-down (UD) components are 0.8, 3.4, and 0.7 cm, respectively. The reason why the error of the NS component is larger than that of the other components is that the satellite has a polar orbit. Still, the error is much smaller than the displacement, hence the detected displacement is significant. The RMS errors of EW, NS and UD components between the 3-D deformation and GNSS observations at seven stations installed in Sakurajima are 1.2, 1.6 and 0.7 cm, respectively, which means the 3-D deformation and the GNSS observations are consistent taking into account the error of 3-D deformation.

We also tried to utilize azimuth displacement derived from MAI. However, its precision is much lower than that of InSAR and the estimated 3-D deformation is hardly improved by the MAI result.

Keywords: ALOS-2, InSAR, 3-D deformation, Dike intrusion, Sakurajima

Effect of atmospheric-related noise reduction using numerical weather model -Application to the 2015 Sakurajima dike intrusion event -

*Tomokazu Kobayashi¹

1.GSI of Japan

One of the cause of phase errors for InSAR is an effect of atmosphere. An error reduction approach using a correlation between phase change and elevation is often employed. Kobayashi et al. (2014) have developed an error reduction tool using numerical weather model, named AtmDeRay. In this presentation, I report the effect of the atmospheric-related noise reduction using numerical weather model, which is demonstrated by the analysis for the 2015 Sakurajima magma intrusion event. The magma intrusion got started on August 15, 2015. The intrusion was inferred to occur beneath the summit area based on seismicity and geodetic observations. The anomalous activity stopped on the same day, and no remarkable crustal deformation was observed. Emergency observations of ALOS-2 satellite were done for the volcanic activity. The observations are from the east side by ascending/left-looking (path 125) and descending/right-looking (path30) orbits, and from the west by ascending/right-looking (path131) and descending/left-looking (path 23) orbits. The first interferogram produced by the data acquired on August 16 has been strongly affected by atmosphere, in which there are a strong elevation-correlated phase change of about 9 cm in and around Kirishima volcano. In this interferogram, a clear crustal deformation signal with a LOS shortening of about 16 cm is observed in and around Nabeyama which is located in the east of the Sakurajima volcano, and in addition, it should be noted that a LOS shortening signal of about 7 cm is clearly identified at the Minamidake summit. The phase change estimated from AtmDeRay is about 8 and 6 cm at maximum in Kirishima volcano and Minamidake summit, respectively. On the other hand, the predicted phase change around Nabeyama is up to 1 cm at most. Using this phase error model, the phase changes in and around Kirishima and Minamidake summit are suppressed in the range of about 1cm, while the phase change in and around Nabeyama remains as it is. In other interferograms obtained by the observations from the east side (path 23), there is little effect of atmosphere in and around Kirishima area, and we cannot identify any significant LOS shortening signals at the Minamidake summit. It suggests that the phase change corrected by AtmDeRay possibly reflects the true crustal deformation. The atmospheric noise has a serious effect on the source modeling. When inverting GNSS data and/or other three noise-less interferograms except for path 125, a dike opening beneath the Showa crater is obtained as the possible model. This model cannot account for the LOS shortening at the Minamidake summit seen in the original interferogram of path 125. If using the interferogram before the noise reduction for the source modeling, a crack opening with a low dip angle is determined as the best model, and the model fitting gets rather bad. It suggests that atmospheric noise reduction is indispensable for InSAR-based volcano observations, otherwise there is a possibility that we misinterpret the deformation source and wrongly assess volcanic activity.

Acknowledgements: ALOS-2 data were provided from the Volcano Working Group under a cooperative research contract with JAXA (Japan Aerospace Exploration Agency). The ownership of ALOS-2 data belongs to JAXA. Numerical weather model data were provided from JMA (Japan Meteorological Agency) under a cooperative agreement with JMA.

Keywords: InSAR, Atmospheric-related noise, numerical weather model

Interpretation of InSAR images by FEM: Effects of topography

*Youichiro Takada¹

1. Faculty of Science, Hokkaido University

Synthetic Aperture Radar (SAR) plays very important role in detecting volcanic deformation all over the world. Recently, in Japan, volcanic deformation associated with eruption and/or dike intrusion at Mt. Sakurajima, Mt. Kirishima, and Mt. Ontake etc. has been elaborated by using SAR interferometry. The spatial resolution of SAR satellites has been increasing with time, by which we can grasp more detailed surface deformation at the flank and the summit of volcanic edifices. Also, airborne SAR technique is developed to attain higher spatial resolution.


To quantitatively interpret the SAR images of higher resolution, we need improved numerical modelling scheme. Especially for volcanoes with steep edifice, the surface deformation due to shallow dike intrusions should be affected by surface topography. In this study, I develop an improved model of dike intrusion considering realistic topography, and apply it to the InSAR images of Mt. Sakurajima to evaluate the effect of surface topography.

On August 2015, the Japan Meteorological Agency raised volcanic alert level for Mt. Sakurajima to 4, following increased volcanic activities. The InSAR images of Mt. Sakurajima acquired by ALOS2 indicate clear Line-of-Sight (LOS) length change in the island exceeding the noise level. The displacement pattern seems well explained by crack opening. The crack locates in the central part of the island where surface altitude is high. As the crack sits quite shallow depth, it is very likely for InSAR images to be affected by surface topography. I calculated surface deformation by finite element method using COMSOL Multiphysics fully considering the surface topography derived from SRTM (Shuttle Radar Topography Mission) data (Figure). I set a rectangular crack in an elastic medium corresponding to a dike. Given crack opening, the finite element model well explains the InSAR image of surface deformation during August 10 and 24, 2015.

Next, I ran the calculation setting surface altitude as 0 m everywhere, and noticed that the surface deformation gets too large. To explain the InSAR image without considering realistic topography, we have to increase the crack depth by over 500 m. The calculated LOS displacement with such "flat topography" correction still differs from the finite element analysis about 1cm around the summit area. The difference shows positive and negative pairs, which may be identified by further noise reduction. In the presentation, I mention on the model application to other InSAR pairs, and expected topographic effects for shallower crack.

Keywords: SAR, FEM, Sakurajima, Surface topography

Finite element model and dLOS of Sakurajima

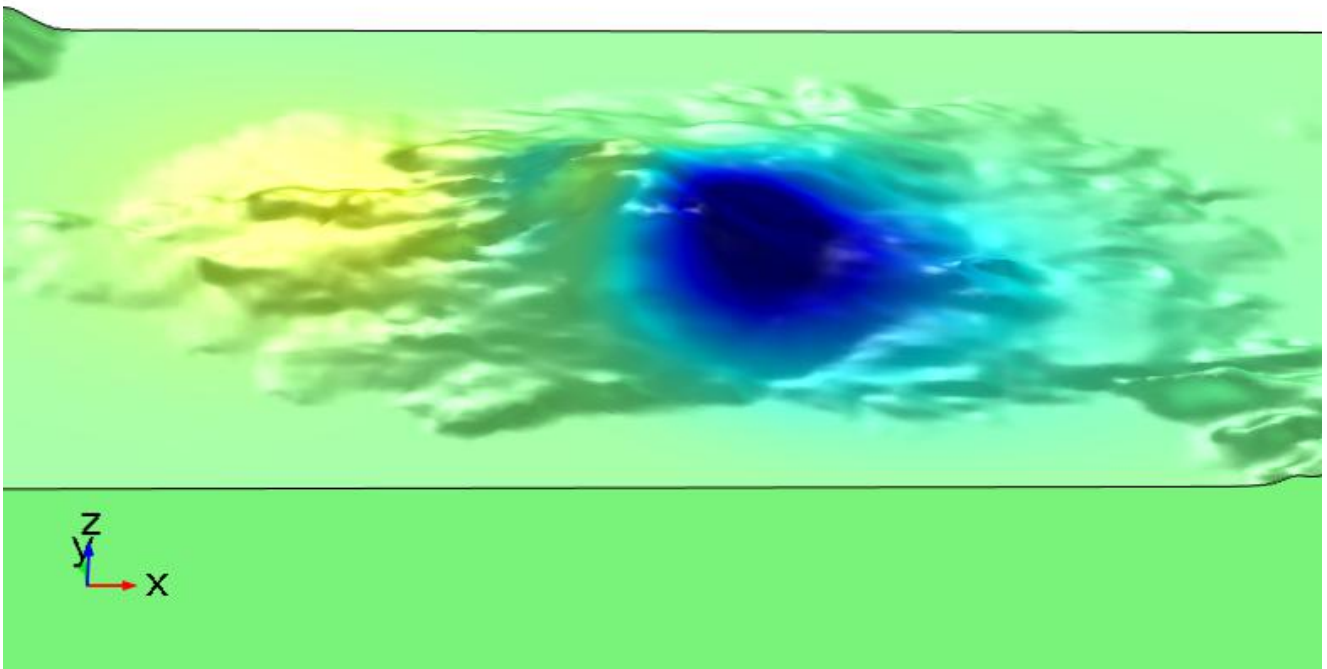

Ground-based radar interferometer observation system for monitoring of surface deformation around the volcanic crater

*Taku Ozawa¹, Yosuke Miyagi¹, Yosuke Aoki², Hiroshi Tsuji²

1.National Research Institute for Earth Science and Disasters, 2.Earthquake Research Institute, The University of Tokyo

Ground-based radar interferometer (GBRI) transmits a microwave from an antenna installed on the ground and receives its backscatter from the target. Then change of distance between an antenna and a target is obtained from temporal phase change at each pixel. In previous researches using spaceborne SAR and GNSS, local deformations around craters had been detected in many volcanoes. For researches on volcanic mechanism and on eruption prediction, monitoring of such deformation is important. Then we started the research on GBRI to monitor surface deformation around a volcanic crater and are installing GBRI observation system around the Asama volcano now.

This system is composed by two GBRI sensors; the synthetic aperture radar type (LiSA mobile k09 of LiSALab) and the real aperture radar type (GPRI2 of Gamma Remote Sensing). These GBRI use the 17GHz microwave with 200-300MHz bandwidth, and then resolution of the range direction is better than 1 meter. LiSA mobile k09 transmits a microwave while the antenna moves on the rail of 3m, and high resolution for the cross-range direction can be obtained by synthetic aperture processing. On the other hand, GPRI2 uses the antenna with 2.5m width for cross-range direction, and comparable resolution for cross-range direction with LiSA mobile k09 can be obtained.

GPRI2 was already installed in the Asama volcano observatory of the Earthquake Research Institute, the University of Tokyo, and we started test observation. At February 2016, observation area is covered by snow. In such situation, coherence during 1-hour was stable in most time. However, non-deformation component such as tropospheric delay has often reached to 2cm in 1-hour, and then reduction of such component is one of big issues in this research. In the presentation, we will show investigation results for longer observation data. Furthermore installation of the LiSA mobile k09 will be finished in March. We will also show its initial observation result in the presentation.

Keywords: Ground-based radar, volcano, deformation

GB-SAR technology and its deployment

*Motoyuki Sato¹

1. Tohoku University

GB-SAR (Ground Based Synthetic Aperture Radar) is one kind of Synthetic Aperture Radar (SAR), whose platform is fixed on the ground surface. GB-SAR is useful for monitoring slow varying phenomena such as ground deformation due to landslide and volcanic activities. One GB-SAR system can monitor wide area with high resolution, therefore we do not have to select discrete positions to be measured, which is common for conventional methods such as GPS and strain meter. GB-SAR technology has been developed since 1980s, where most of the system employed a vector network analyzer (VNA) as a transmitter and a receiver. Then in 1990, commercial systems have been deployed, which can acquire much faster than VNAs. These GB-SAR systems used a liner rail to move a radar unit with a pair of transmitting and receiving antennas. Recently, multiple fixed antennas can also be used for realize GB-SAR systems.

Frequency allocation is an important problem in practical use of GB-SAR. In European Union, 17GHz has been used for GB-SAR, and the same frequency is widely used also in Japan. GB-SAR information changes dependent on the operation frequency. Different frequencies should be studied for useful use of GB-SAR.


Compared to space borne SAR systems, GB-SAR normally images near range targets. Therefore, SAR processing algorithm used in space borne SAR systems cannot be used, and generally the SR processing of GB-SAR data required relatively larger computation for the size of the data sets. In order process the data faster, we are proposing a method to use fractional Fourier transformation. Then in order to obtain higher resolution, we are using CS (Compressive Sensing) approaches.

Even though the targets are located relatively short range, for example, a few hundred meters to 1km, we found that the atmospheric effect is very strong in interferometric analysis. Atmospheric correction is quite important for accurate measurement in SAR interferometry.

Tohoku University is operating 3 sets of GB-SAR systems using 17GHz. One of the systems is fixed at Arato-zawa landslide site located in Miyagi prefecture since November 2011. Interferometric SAR images are obtained in real time and transferred to the university through internet. This is a social demonstration of real time warning system, which is a collaboration of Tohoku University and Kurihara city. This type of observation is strongly required in Japan. We are now planning to use it for observation of volcanic activities.

Then we are now testing GB-SAR for vibration observation of bridges and other social infrastructures and buildings.

Keywords: GB-SAR, Landslide, vibration

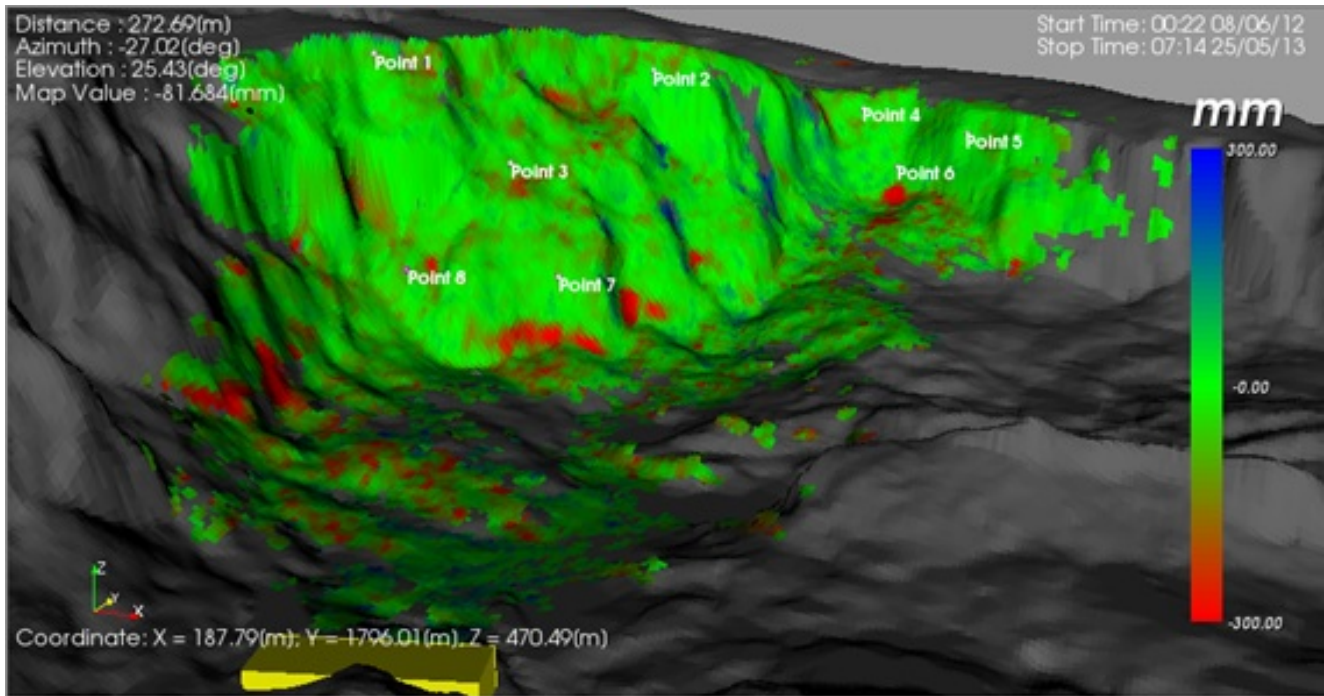

Antarctic ice shelf and ice sheet through ALOS-2 / PALSAR-2 satellite

*Tsutomu Yamanokuchi¹, Koichiro Doi², Kazuki Nakamura³, Shigeru Aoki⁴

1.Remote Sensing Technology Center of JAPAN, 2.National Institute for Polar Research, 3.Nihon University, 4.Institute for Low Temperature Science, Hokkaido University

After the two years of launch of ALOS-2 satellite, PALSAR-2 collected the fine data on Antarctic continent and surrounding ice shelves. We would like to report the first two years of results using ALOS-2 / PALSAR-2 data. Our study focus on two subjects, one is 3pass or 4pass DInSAR (DDInSAR) analysis for detection of marginal zone between ice sheet and ice shelf, known as "grounding line". It is very few 3pass InSAR pairs even after two years of data accumulation, we introduce the intermediate report of the analysis through the comparison of grounding lines made by ERS-1/2 and ALOS / PALSAR data respectively. The other is time series analysis of ice shelf change on Prinsesse Ragnhild Kyst. This area is located on East Antarctica, where its climatological change is said to be relatively calm. We investigate the variation of the ice shelf trough the time series SAR backscatter image analysis.

Keywords: ALOS-2, InSAR, Time series analysis

InSAR measurement of ground subsidence at permafrost areas: preliminary results

*Masato Furuya¹, Kento Iio²

1.Department of Earth and Planetary Sciences, Hokkaido University, 2.Department of Natural History Sciences, Hokkaido University

Permafrost thawing due to global warming can not only change any local hydrological and biological systems but also generate methane gasses that could further contribute to enhance global warming. Moreover, ground subsidence associated with permafrost thawing is another natural hazard to social infrastructures such as roads and pipelines in high-latitude regions. However, a comprehensive mapping of on-going permafrost thawing and refreezing is challenging, because of their remote and wide spatial coverage.

Liu et al. (2015, JGR-ES) suggested that satellite synthetic aperture radar interferometry (InSAR) could reveal on-going subsiding signals around thermokarst, which could tell us the dynamic processes and thus the mechanisms responsible for on-going permafrost thawing, using satellite remote sensing.

Meanwhile, at Yamal Peninsula, northern Siberia, four caldera-like collapsed topographies were discovered, whose maximum diameter and depth reach 37 meter and 70 meter, respectively. These sudden collapses are attributed to the rapid thawing of permafrost due to the anomalously high air-temperature in recent years.

Given these backgrounds, we have performed InSAR measurements over Yamal Peninsula to examine if any ground deformation has been on-going. We will report and discuss our preliminary results and issues.

Keywords: permafrost, InSAR, thermokarst, ground subsidence, ionosphere

Phase shift observed over a forest stand with PALSAR-2 SAR interferometry in Hakone

*Manabu Watanabe¹, Hiroto Nagai¹, Ryo Natsuaki¹, Masanobu Shimada^{1,2}

1.Japan Aerospace Exploration Agency, 2.Tokyo Denki university

Volcanic activity has increased in Owakudani Park, Hakone, Japan, since April 26, 2015, including a small eruption that occurred on May 29. Several Phased Array type L-band Synthetic Aperture Radar-2 (PALSAR-2) observations were conducted to detect crustal movement near the crater area. A phase shift of about 90° over a Japanese cedar forest stand located near Owakudani Park was clearly observed for the interferometric pair on March 1 and May 10, 2015. However, no clear phase shift was observed for the adjacent broadleaf forest stand. Except for the pair, no clear phase shift was observed over the forest stands.

Watanabe et al. [1] used L-band Synthetic Aperture Radar (SAR) to determine that the dielectric constant corresponding to moisture in a tree trunk often increases after rainfall and induces σ_0 increase. Rainfall of 10.5 mm/h was observed 6 h prior to the observation on March 1, which may have affected the ground phase beneath the cedar forest stands.

A model describing the phase delay due to water vapor in the atmosphere [2] is introduced in the present study to describe the phase delay due to the moisture change in a forest layer. It is indicated that the estimated phase shift due to the moisture variation of trees is 109° assuming a 20% refractive index variation, which was actually observed in trees in Tsukuba and Tomakomai. This result implies that the possible cause of the phase shift observed over the Japanese cedar forest stand was caused by moisture change in the forest layer after the strong rainfall.

[1] M. Watanabe, T. Motohka, T. Shiraishi, R. B. Thapa, C. Yonezawa, K. Nakamura, and M. Shimada, "Multi-temporal Fluctuations in L-band Backscatter from a Japanese Forest", IEEE Trans. Geosci. Remote Sensing, 53(11), 5799-5813, 2015

[2] M. Shimada, "Correction of the satellite's state vector and the atmospheric excess path delay in the SAR Interferometry—An application to surface deformation detection," J. Geodetic Soc. Japan, 45(4), 327-346, 1999

Keywords: Moisture

Detection of slope failure using ALOS and ALOS-2 data -Application to Mt. Fuji

*Kazuya Ishitsuka¹, Toru Takahashi¹, Toshifumi Matsuoka^{1,2}, Takao Aizawa³

1.Fukada Geological Institute, 2.Center for the Promotion of Interdisciplinary Education and Research, Kyoto University, 3.Sancoh Consultants Co. Ltd.

Synthetic aperture radar (SAR) has an advantage for acquiring information in wide area with high spatial density, and this advantage would be effective for slope failure detection. However, some slopes are difficult to be monitored because of low coherence due to slope angles or surface coverings. In this study, we applied InSAR analysis to Mt. Fuji, which has been recently paid attention to its slope failure, and clarified slopes that can be monitored by InSAR analysis. Some case studies of slope failure detection were also done.

Our InSAR results using ascending and descending data showed the slopes opposite to radar illumination exhibits low coherence likely due to the shadow effect. Accordingly, it is possible to monitor most of slopes using either ascending or descending data. However, the western slopes of Mt. Fuji constantly showed low coherence in both ascending and descending data. This is attributed to the layover effect in ascending data and the shadow effect in descending data. Compared with ALOS and ALOS-2 data analysis, ALOS-2 results have larger high coherence areas compared with ALOS result. We also found the slope failure in the Houei crater. These results show the effectiveness of slope failure monitoring using InSAR analysis of ALOS and ALOS-2 data.

Keywords: SAR interferometry, Slope failure, Mt. Fuji

Preliminary Analysis of Airborne SAR Interferometry Using Pi-SAR-L2 Data

*Makoto Murakami¹, Shohei Narita¹

1.Hokkaido University

1. Introduction

Synthetic-aperture radar (SAR) is a powerful tool for volcano monitoring that enables all-weather non-contact remote sensing covering wide area on the globe. Space born SAR like PalsAR2 onboard ALOS2 already becomes a standard method for volcanology, whereas airborne interferometric SAR remains at an experimental stage for a long time, owing to many obstacles coming from difficulties to keep flight trajectories of paired observations close enough to each other. Recent progress in airborne SAR technology, the capability of the instrument is improving. Here process Pi-SAR-L2 data to evaluate the technological possibility of L-band airborne SAR interferometry.

2 Interferometry of Pi-SAR-L2 data and Results

Pi-SAR-L2 is equipped with a precise INS-GPS hybrid type navigation system so that high level trajectory control is achievable. In reality, a perfect identical routing of the flight is still difficult because of unpredictable aeronautical conditions during the flight. As a result, the distribution of the phase of the interferogram suffers from phase undulations caused by the entangled nature of the geometric configuration of the trajectories. An appropriate removal of those phase undulation caused by the complexity of the wake is the key factor for an effective detection of crustal deformation information. Here we try a relatively simple approach based on surface fitting for the removal of this unwanted phase undulations. As a test target area we selected Sakurajima region where a magmatic intrusion event took place in August, 2015 and crustal deformation is already confirmed by ALOS2 InSAR and GNSS analyses. The Pi-SAR-L2 data were granted by JAXA. For interferometric analysis we used RINC (ver. 0.36) software developed by Dr. Taku Ozawa at NIED. We processed a pair acquired on 2013/9/13 and 2014/8/7 spanning over a period when no crustal deformation was detected. We obtained initial interferogram by simple differentiation of two data sets (SLC) following a standard process of RINC software. At this stage the phase distribution is a mixture of several components coming from different origins, such as incompatibility of repeating trajectories, topography, propagation medium inhomogeneity and crustal deformation on the ground surface. For the detection of crustal deformation, we at least have to remove phase undulation caused by the incompatible trajectories. In this study we removed this undulation using a simple surface fitting technology. As a first step we found the entire interferogram can be divided into 3 parts separated by 2 range lines across which phase continuity is lost. Because in each of the patches we confirmed that the phase change is smooth, we carried out surface fitting assuming quadratic function for each patch separately. Then we subtracted the best fit surface component from the original interferogram. As the next step we also subtracted the best fit component proportional to ground undulation. We applied these processes separately for each of 3 patches of the original interferogram and finally we combined all the results. We found that the distribution of remaining phase is within +/- half wave length range which corresponds to about +/- 6 cm. This indicates the possibility of the air-borne interferometry for the detection of crustal deformation similar to the 2015 intrusion event beneath Sakurajima.

Acknowledgement: The airborne sar data were provided by JAXA. We used RINC(ver.0.36) developed by Dr. Taku Ozawa at NIED. We also used digital elevation model by GSI.

Keywords: Crustal Deformation, Volcanology, Remote Sensing, Airborne SAR

PALSAR-2 ScanSAR Interferometry - Full Aperture processing and Specan processing -

*Masanobu Shimada¹

1.Tokyo Denki University, School of science and engineering

PALSAR-2 has wide observation capability using the ScanSAR with the amplitude image and the ScanSAR-ScanSAR interferometry. This paper describes the sensitivity of the PALSAR-2 ScanSAR and compares the performances between Specan SAR and full aperture SAR data.

Keywords: PALSAR-2, ALOS-2

Ground Deformations in the Kanto and Osaka Plains Observed by ALOS/PALSAR and ALOS-2/PALSAR-2

*Manabu Hashimoto¹

1. Disaster Prevention Research Institute, Kyoto University

Based on the hypothesis that the spatial distribution of ground deformation is correlated to subsurface structure such as buried faults, we have investigated ground deformations in two typical alluvial plains in Japan, the Kanto and Osaka plains, with SAR and discussed their relationship with active faults. Here we report some results of time series analysis of ALOS/PALSAR images and 2-pass differential interferometry of ALOS-2/PALSAR-2 images in these two regions. We utilized ALOS/PALSAR images acquired during August 2006 to April 2011 and ALOS-2/PALSAR-2 during August 2014 to December 2015. More than 15 acquisitions during longer period than 3 years were made for ALOS/PALSAR in each region. Therefore we applied persistent scatterer interferometry (PS-InSAR) using StaMPS software developed by the Stanford University (Hooper et al., 2004). On the other hand, interval of acquisitions of ALOS-2/PALSAR-2 is as long as 1 year and 4 months. Furthermore there are only a few acquisitions of an area with the same look angle. Therefore we applied conventional 2-pass differential interferometry to ALOS-2/PALSAR-2 images with Gamma® software. ASTER-GDEM ver.2 DEM (Tachikawa et al., 2011) is adopted for the derivation of topographic fringes and geocoding.

On the basis of PS-InSAR analysis of ALOS/PALSAR images (Path 406 Frame 710) in the Kanto plain, we revealed range increase up to 10 mm/yr in the Saitama city and northeastern Tokyo. This result infers that ground subsidence is still continuing there. We recognize subsidence along the Tone River. It is worth noting that range decrease > 5 mm/yr is found along the Tachikawa fault that crosses the Tachikawa city, western Tokyo. By stacking interferograms of ALOS-2/PALSAR-2 images (Path 119 Frame 750) centered in the Koga city, we found range increase near the Saitama city, which is consistent with the ALOS/PALSAR observation. However, there are inconsistent deformations with that in the rest of area. We need more data for longer time period. We also analyzed images of its western neighbor (Path 120 Frame 740) and found large change in line of sight in the Chichibu basin for the pairs including images acquired in summer. This might be attributed to the characteristics of local weather.

Hashimoto (2014) already reported subsidence along the Arima-Takatsuki Fault zone and uplift in southern Kyoto basin from the analyses of ALOS/PALSAR images (Path 65 Frame 2920). However, we did not find these deformations in any interferograms of ALOS-2/PALSAR-2 (Path 21 Frame 2910, Path 26 Frame 2920, Path 127 Frame 680 etc.). Deformation may be smaller than observation errors, but it may be necessary to examine the possibility that these deformations stopped during 2011 - 2014, using multi-satellite images.

ALOS-2/PALSAR-2 and part of ALOS/PALSAR images used in this study were provided by JAXA under the ALOS-2 RA-4 (#1178, PI: Manabu Hashimoto). Other ALOS/PALSAR images were obtained under the project "the Comprehensive Research on the Uemachi fault zone" by MEXT. Copyright and ownership of ALOS/PALSAR images belong to JAXA and METI. Those of ALOS-2/PALSAR-2 images belong to JAXA.

Keywords: Synthetic Aperture Radar, ground deformation, ALOS/PALSAR, ALOS-2/PALSAR-2, Kanto Plain, Osaka Plain

Observations and Interpretations of Two Mountain Glaciers on the Eastern slope of Mt. Tsurugi by Pi-SAR2 airborne SAR

*Masato Furuya¹, Kotaro FUKUI², Shoichiro Kojima³, Takeshi Matsuoka³

1.Department of Natural History Sciences Hokkaido University, 2.Tateyama Caldera Sabo Museum, 3.National Institute of Information and Communications Technology

We have performed airborne synthetic aperture radar (SAR) measurements at two glaciers near Mt. Tsurugi, Japan, in August, October 2013, August 2014, and March 2015. The Pi-SAR2 system used in this study consists of two X-band SAR antennas, and allows us to perform single-pass interferometry. Also, the Pi-SAR2 allows us to perform full polarimetry with the maximum spatial resolution of 0.3 m.

Differencing the digital elevation models (DEM) at multiple epochs, it turns out that the differences between August and October 2013 reach ~10 to 20 meters with errors of 5-10 meters, which would mostly represent the seasonal changes in snow thickness.

Full-polarimetric observation results indicated significant intensity in the HV channel over the glacier areas even in the summer seasons. The significant signals in the HV channel were unexpected, because we tend to attribute the HV signals to volume scattering processes. The Pi-SAR2 is an X-band radar, and we cannot expect significant penetration over the snow/ice areas. We suggest another likely interpretation on the apparent HV signals over the glaciated areas.

Keywords: Mt. Tsurugi, Sannomado glacier, Komado glacier, Pi-SAR2, Polarimetric SAR

Line-of-Sight displacements in Nishinoshima detected by ALOS-2 PALSAR-2 SAR interferometry

*Ryo Natsuaki¹, Manabu Watanabe¹, Masato Ohki¹, Masanobu Shimada², Sinichi Suzuki¹

1.Japan Aerospace Exploration Agency, 2.Tokyo Denki University

Nishinoshima island in the Pacific Ocean has been erupting since November 2013. At first, it created a small new island located in south-east off shore of the pre-existing island. Nowadays the new island has rapidly expanded the land with its lava flow and almost absorbed the pre-existing island. According to the current record, the pre-existing island had 760(North-South) x 600(East-West) meter land while the new one had 1960 x 1960 m as of February 3, 2016 [1]. The state-of-the-art L-band Synthetic Aperture Radar (SAR), Phased Array type L-band Synthetic Aperture Radar-2 (PALSAR-2) aboard Advanced Land Observation Satellite-2 (ALOS-2) has been continuously observing the island since its launch. It has 3m spatial resolution with 50km swath in ultra-fine mode [2].

As Nishinoshima is an active volcano, it has been analyzed with mainly photogrammetric approach [3]. In this paper, we performed interferometric analysis and found line-of-sight displacements, which indicates ground subsidence toward the lava flow. The ratio was approximately 20 - 30cm in 2 months. Because of the discrete timing of ascending and descending observations, and unsteady volcanic activities, the precise speed of subsidence has not been determined. At the same time, we found that the lava flow hidden by the coagulated rocks shows very low temporal coherency. That is, we can evaluate the activeness of the volcano by interferometric analysis which cannot be seen by the simple photographic analysis. On the other hand, no significant deformation was found in the interferograms acquired after October, 2015.

References

- [1] Japan Coast Guard website "Nishinoshima Volcano" 9 Feb. 2016.
<http://www1.kaiho.mlit.go.jp/GIJUTSUKOKUSAI/kaiikiDB/kaiyo18-e1.htm>
- [2] Kankaku Y. et al., "PALSAR-2 Launch and Early Orbit Status" IEEE Geoscience and Remote Sensing Symposium 2014, pp. 3410 - 3412.
- [3] Ohno Y. et al., "The change of the Nishinoshima volcanic activity to catch with the image of various sensors," Journal of the Japan Society of Photogrammetry Vol. 54(1), PP. 46-51, 2015

Keywords: ALOS-2, PALSAR-2, SAR interferometry, Nishinoshima

InSAR analysis all over Japan by ALOS-2 (Daichi-2) / PALSAR-2 data

*Yuji Miura¹, Masayuki Yamanaka¹, Shinya Yamada¹, yasuki kakiage¹, Hiroyuki Nakai¹, Kozin Wada¹, Yu Morishita¹

1.GSI of Japan

The Geospatial Information Authority of Japan (GSI) has approached to monitor ground surface deformation of earthquake, volcanic activity, subsidence and landslide all over Japan by InSAR analysis using ALOS-2 (Daichi-2) /PALSAR-2 data. We have processed 2 mode observation dataset for InSAR analysis, which one is strip map mode (band of 50km and resolution of 3m with basic observation scenario in Japan) and another one is scan SAR mode (band of 350km and resolution of 100m with basic observation scenario in Japan).

As a result, we can detect ground surface deformation of earthquake and volcanic activity, subsidence of withdrawing ground water, including temporal subsidence around snow-covered area in winter caused by withdrawing ground water for melting snow, landfill settlement and landslide. There are some wide decorrelation areas in InSAR images analyzed in summer season observation dataset of ascending orbit and one of possibility of decorrelation is the influence of the activity of ionosphere.

We have translated from InSAR images to tiled geospatial data for a web map of GSI called "GSI Maps". Various geospatial information can be shown as well as background maps, including topographic map, aerial photograph, volcanic map and others. This style of publication makes it easy to interpret ground surface deformation of detecting by InSAR with overlaying topographical and geological information.

In this presentation, we report InSAR results all over Japan and challenges.

Keywords: InSAR, ALOS-2, GSI Maps, volcano, earthquake, subsidence

Dynamics of surge-type glaciers in Yukon, Canada, inferred from SAR and optical images

*Takahiro Abe¹, Masato Furuya²

1.Department of Natural History Sciences, Hokkaido University, 2.Department of Earth and Planetary Sciences, Hokkaido University

Ice flow speed is one of the essential components to know glacier variations. Short-term speed-up events such as seasonal fluctuations and glacier surging are attributed to enhanced basal sliding, which can be influenced by evolution of subglacial drainage system and effective water pressure (ice overburden pressure minus basal water pressure). Due to logistic problems, the mechanism has not been fully understood.

Recent advances in space geodetic technique have enabled us to reveal the spatial and temporal changes in ice speed over entire ice sheet and mountain glaciers. We first revealed the spatial and temporal speed changes at surge-type glaciers in Yukon, Canada, using ALOS/PALSAR radar images between 2007 and 2011, and we found winter speed-up at their quiescent phases (Abe and Furuya, 2015). In the absence of surface meltwater input in winter, we suggested the importance of englacial water storage in basal crevasses, and extracted water with high water pressure may enhance the basal sliding.

In 2014, two new SAR satellites were successfully launched, one of which is ALOS-2 with L-band SAR sensor PALSAR-2 operated by JAXA and the other is Sentinel-1 with C-band sensor operated by ESA. They can acquire higher resolution images with shorter intervals, which will reveal more detail information about basal condition, where it is extremely difficult to observe directly.

Landsat optical images have been also used for glaciological research for a long time. Recently, Landsat 8, which was launched in 2013, has given significant impacts on glacier velocity mapping of ice sheets and mountain glaciers (e.g., Fahnestock et al., 2015). Thus, we have also derived the spatial and temporal speed changes near the border of Alaska and the Yukon, using similar feature tracking program (Abe et al., 2015), and we found three ongoing surging events (Klutlan, Steele, and Walsh). Each glacier has the different pattern of spatial and temporal velocity changes associated with the surging event, which is reflected in the meteorological condition and the thermal structure at each glacier.

In our presentation, we will report some new findings derived from satellite images, and discuss future prospects in order to better understand glacier dynamics focusing on the differences between the radar and optical images.

Keywords: Surge-type glaciers, Yukon, SAR, Landsat, Feature tracking

Volcanic deformation in Tokachi-dake volcano, Hokkaido, detected by DInSAR observations

*Yosuke Miyagi¹, Ryohei Kawaguchi¹, Taku Ozawa¹, Hiroaki Takahashi²

1.National Research Institute for Earth Science and Disaster Prevention, 2.Institute of Seismology and Volcanology, Hokkaido University

Tokachi-dake volcano is located in central Hokkaido, Japan, and is the most active volcano in Tokachi-dake volcano group. Middle sized eruptions occurred in 1926, 1962, and 1988-1989, and several small phreatic eruptions also occurred in the meanwhile. After the latest eruption in 1988-1989, many volcanic tremor and active seismicity were revealed. Fumarolic activities from Taisho crater and 62-2 crater have been observed.

Continuous GNSS sites were located adjacent to the top of the volcano. They have revealed that local inflation occurred in the area and it continued up to 2015. These inflation increased in May, 2015. X-band SAR/TanDEM-X and L-band SAR/ALOS-2 observed the Tokachi-dake volcano in same period, and detected the local transient inflation of top of Tokachi-dake volcano. In this study, we tried to acquire two dimensional displacements, using DInSAR results observed from both west and east side of the area. Then we tried to infer deformation source. First, we use simple Mogi source [Mogi, 1958] as the deformation source, but it is necessary to take into consideration an influence of the terrain [Kawaguchi et al., 2016]. Then we acquire better fit between observed and modeled data.

Keywords: SAR, Deformation, Tokachi-dake Volcano