

## Using Two Wells Pumping Test to Estimate the Spatial Distribution of Hydraulic Properties

## Using Two Wells Pumping Test to Estimate the Spatial Distribution of Hydraulic Properties

\*Chen Jain-Wei<sup>1</sup>, Chen Yong-Lin<sup>2</sup>, Lin Hong-Ru<sup>2</sup>, Huang Shao-Yang<sup>3</sup>, Yeh Tian-Chyi<sup>5</sup>, Wen Jet-Chau<sup>3,4</sup>

\*Jain-Wei Chen<sup>1</sup>, Yong-Lin Chen<sup>2</sup>, Hong-Ru Lin<sup>2</sup>, Shao-Yang Huang<sup>3</sup>, Tian-Chyi J. Yeh<sup>5</sup>, Jet-Chau Wen<sup>3,4</sup>

1. Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 2. Graduate School of Engineering Science and Technology, National Yunlin University of Science and Technology, 3. Research Center for Soil & Water Resources and Natural Disaster Prevention (SWAN), 4. Department and Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 5. Department of Hydrology and Water Resources, The University of Arizona

1. Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 2. Graduate School of Engineering Science and Technology, National Yunlin University of Science and Technology, 3. Research Center for Soil & Water Resources and Natural Disaster Prevention (SWAN), 4. Department and Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 5. Department of Hydrology and Water Resources, The University of Arizona

Many researches have been proved that tomography can be successfully applied to single well pumping tests at the field site. However, how to apply the technique to large-scale problems would be a challenge. If we could pumping two wells simultaneously, it would make more interference range. For now, two wells pumping test has not been investigated in the field site. Therefore, the two wells pumping test is conducted in this study. The transient observed drawdowns were used to estimate transmissivity (T) and storage coefficient (S). The estimated T and S would be validated, to test whether two wells pumping test makes the better result and decrease cost at times.

Field two wells pumping were conducted in National Yunlin University of science and Technology (NYUST) campus. The analysis method using Hydraulic Tomography (HT) applied to estimate T and S by VSAFT2 (Variably saturated flow and transport in 2-dimensions) software.

Results show that pumping tests have more stimuli and more information will be obtained. The advantages of two wells pumping tests can be used to estimate the heterogeneous spatial distribution of hydraulic properties by using fewer pumping tests than single well pumping tests. Therefore, the results of inversion will converge quickly and efficiently.

キーワード : Two Wells Pumping test、 Hydraulic Tomography、 Heterogeneity

Keywords: Two Wells Pumping test, Hydraulic Tomography, Heterogeneity


# Permeability Degradation of Permeable Pavement Material Due To Clogging

\*Maricris Mendoza Jalmasco<sup>1</sup>, Yongjin Choi<sup>1</sup>, Jaehun Ahn<sup>1</sup>

1. Pusan National University

Clogging is one of major determinants in the lifespan of permeable pavements; the permeability and infiltration capacity of pavements can degrade much with physical clogging of pores in pavements. A series of laboratory experiments were conducted to understand and quantify the physical clogging and threshold value for particles governing physical clogging. Two different clogging particle distributions, reported by Seoul Metropolitan City and Duncan (1999), were prepared and used for clogging. The clogging particles were spread on the permeable pavement material under a constant head set up. For the specimens with area of 300x300 mm, and porosity of 0.20, the clogging particles of about 200 g, made the samples clogged reaching the terminal permeability. Both clogging particles reduced the coefficient of permeability by about 85%. Further efforts are needed to standardize the test procedure and investigate other specimens.

Keywords: Low Impact Development, Permeable Pavements, Porosity, Particle Distribution

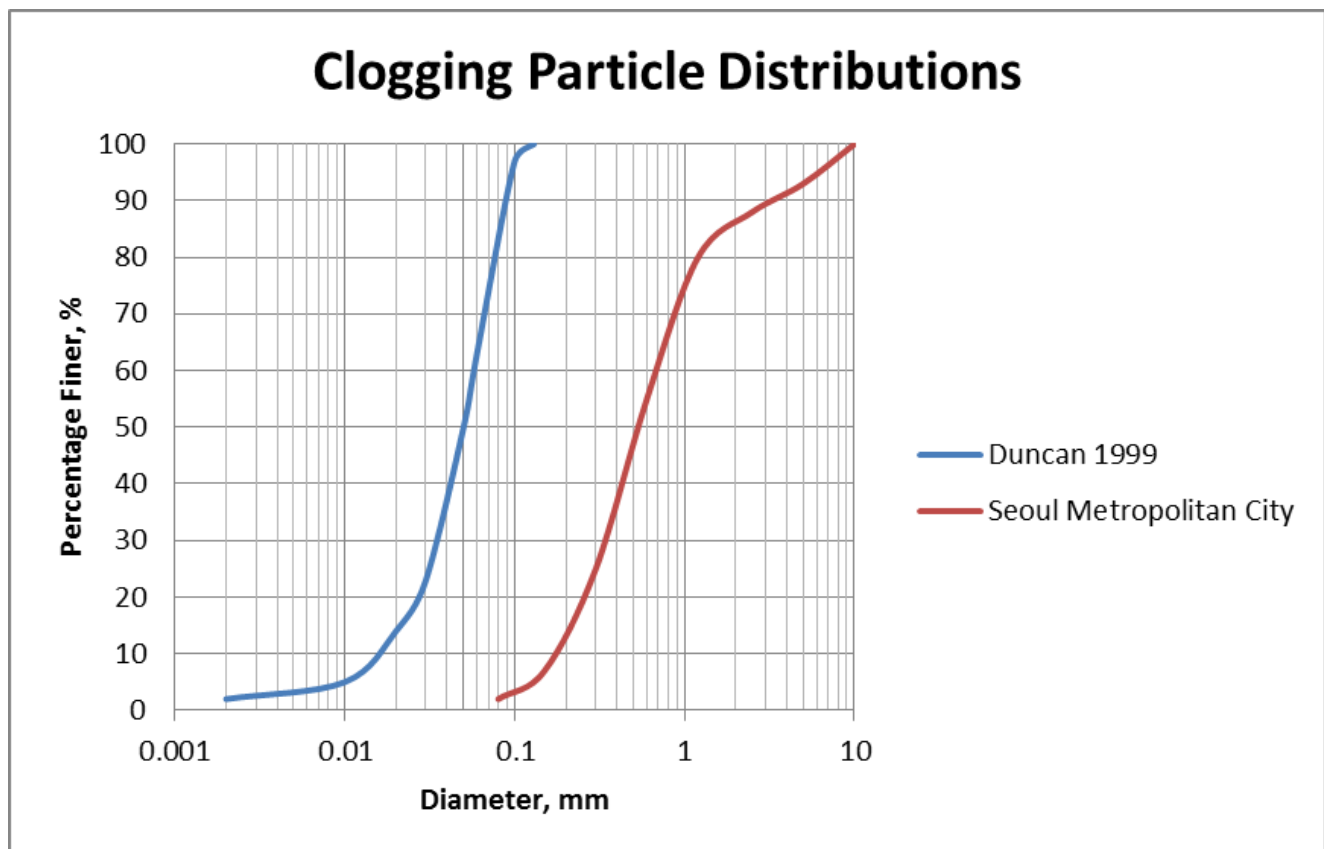

# Microbially induced calcium carbonate precipitation: A bioremediation technology for heavy metal immobilization

Kazuyuki Hayashi<sup>1</sup>, \*Ningjun Jiang<sup>2</sup>, Kenichi Soga<sup>3</sup>


1. National Institute of Technology, Wakayama College, 2. Univ. of Hawaii at Manoa, 3. Univ. of California, Berkeley

Microbially induced calcium carbonate precipitation (MICP), a bacteria-induced bio-mineralization process, has been investigated extensively in civil, environmental and infrastructure engineering applications. The urea hydrolysis by indigenous or exotic urease-producing bacteria is one of the most common pathways for bio-mediated calcium carbonate precipitation. The MICP process via ureolysis involves several stages: synthesis of enzyme through bacteria metabolic activities; catalysis of ureolytic reactions by enzyme and massive production of ammonia and dissolved inorganic carbon; alkalinity accumulation at the proximity of bacteria cells and formation of calcium carbonate precipitation on nucleation sites (i.e., bacteria cell surfaces) in the presence of available calcium source. Among these processes, production of ammonia and dissolved inorganic carbon can raise the pH of soil pore fluid. Precipitated calcium carbonate can provide extra specific surface area, which improves absorption capacity of soil. Calcium and carbonate may also entrap other metal ions in soil pore fluid to form co-precipitation. These features of MICP are in favor of heavy metal immobilization in contaminated soils. In this study, firstly, a series of rigid-wall column leaching test was conducted to investigate the immobilization effect of MICP treatment on several heavy metal species (Pb, Zn, Ni, and Cu). Base soil was composed of sand and kaolin clay at a ratio of 9:1 (w/w). Binary mixture was prepared in rigid-wall columns using the dry tamping method to maintain uniformity. After saturated by de-aired water, nitrate solution of heavy metals was injected into the column specimen at a rate of 1.0 PV/h (pore volume per hour) for a total volume of 1.5 PV. Soil samples were left alone for 24 hours, before bacteria (*Sporosarcina pasteurii*) solution and urea-CaCl<sub>2</sub> solution were injected in sequence to trigger calcium carbonate precipitation. In some cases, urea-CaCl<sub>2</sub> solution was injected several times to improve precipitation content. After final injection, MICP treated heavy metal contaminated soil samples were held for 20 hours, which allowed calcium carbonate precipitation to grow and form sufficient cementations in soil matrix. As a comparison, control samples without MICP treatment were prepared as well. Finally, the column leaching test was conducted by percolating distilled water downwards. Hydraulic conductivity of soil and pH, EC and heavy metal concentrations of the leachate were measured during the leaching procedure. Results have demonstrated that MICP contributes to better immobilization of most heavy metals investigated in this study. There were only marginal discrepancies in hydraulic conductivity between untreated and MICP treated samples.

In order to understand the interactions between the bacteria solution and heavy metals, a follow-up laboratory batch test was conducted. The interactions were examined under aqueous condition by mixing nitrate solution of heavy metals and the bacteria solution. It was found that the interactions between the bacteria solution and heavy metals were predominantly pH-dependent. In the cases of Zn, Pb and Cu, ionized heavy metals were directly precipitated when mixed with the bacteria solution.

In addition, the efficacy of MICP for heavy metal immobilization was further examined via chemical equilibrium simulation using MINTEQA2. It was found that the aqueous condition in favor of calcium carbonate precipitation also facilitate heavy metal immobilization, mainly through precipitation.


Keywords: Microbially induced calcium carbonate precipitation, Heavy metal immobilization

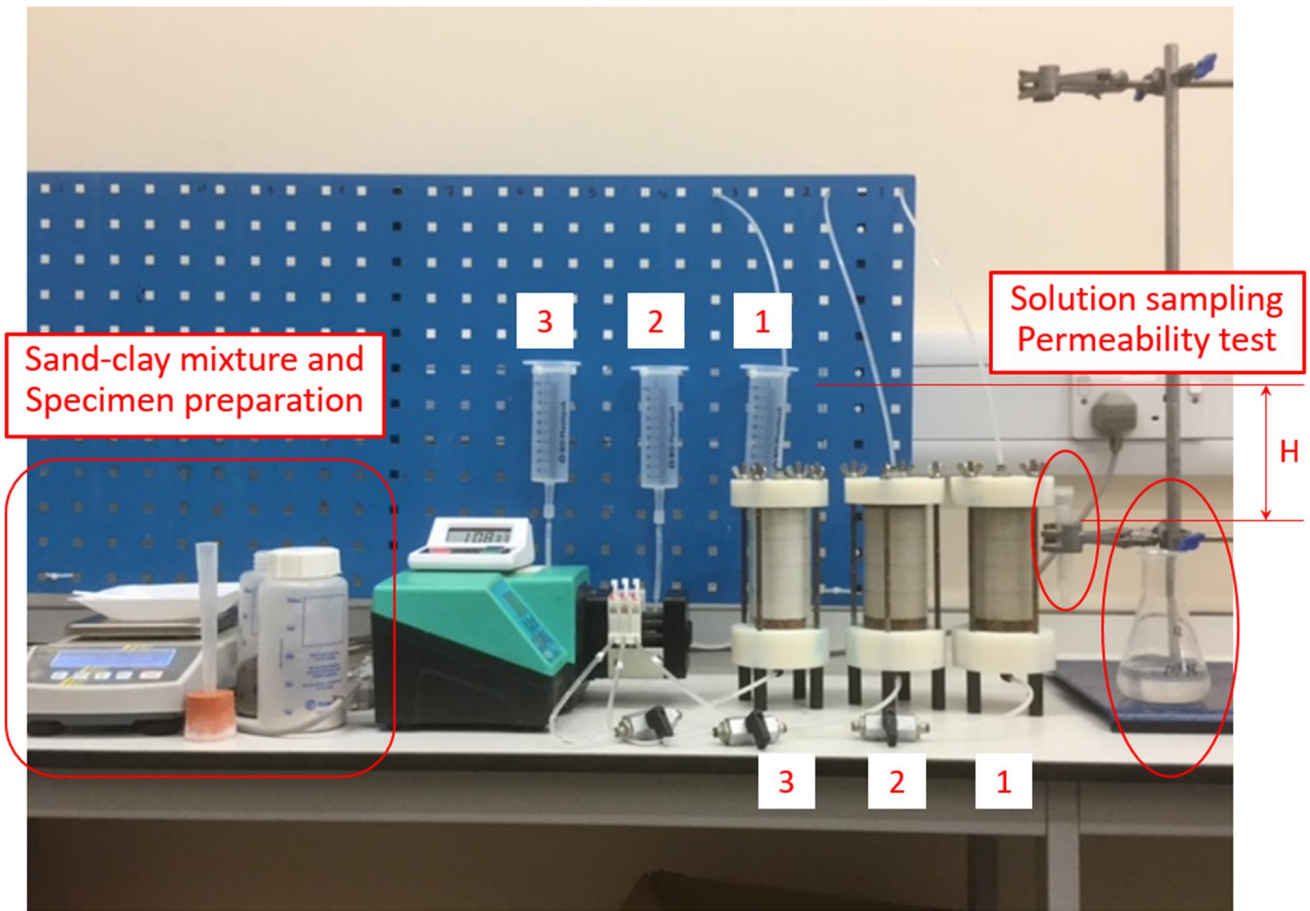


Sand-clay mixture and Specimen preparation

Solution sampling Permeability test


H

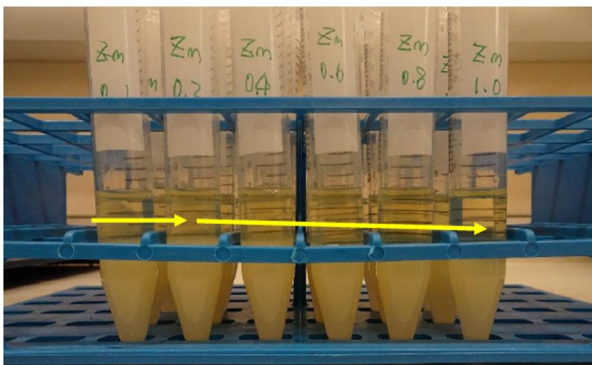


The more concentration, the **less** precipitation ( $C > 0.2$ ).

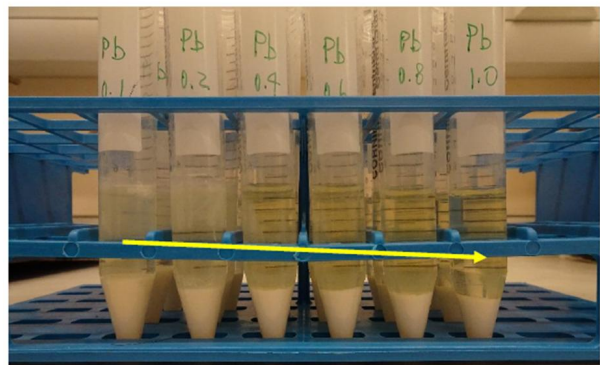

The more concentration, the **less** precipitation.

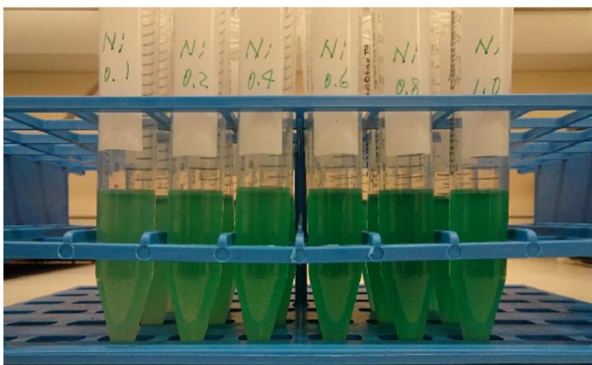

No precipitation, but a little **cloudy**.

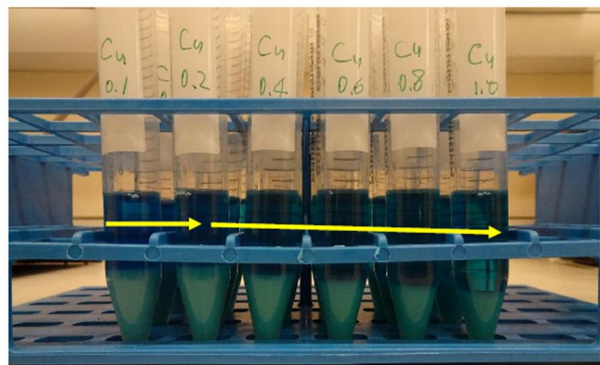

The more concentration, the **less** precipitation ( $C > 0.2$ ).

## Comparison of the Redundant and the Non-Redundant Verification for the Hydraulic Tomography Analysis

## Comparison of the Redundant and the Non-Redundant Verification for the Hydraulic Tomography Analysis

\*Wei Tz-Bin<sup>1</sup>、Chen Yong-Lin<sup>2</sup>、Lin Hong-Ru<sup>2</sup>、Huang Shao-Yang<sup>3</sup>、Yeh Tian-Chyi<sup>5</sup>、Wen Jet-Chau<sup>3,4</sup>

\*Tz-Bin Wei<sup>1</sup>、Yong-Lin Chen<sup>2</sup>、Hong-Ru Lin<sup>2</sup>、Shao-Yang Huang<sup>3</sup>、Tian-Chyi J. Yeh<sup>5</sup>、Jet-Chau Wen<sup>3,4</sup>

1. Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 2. Graduate School of Engineering Science and Technology, National Yunlin University of Science and Technology, 3. Research Center for Soil & Water Resources and Natural Disaster Prevention (SWAN), 4. Department and Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 5. Department of Hydrology and Water Resources, The University of Arizona

1. Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 2. Graduate School of Engineering Science and Technology, National Yunlin University of Science and Technology, 3. Research Center for Soil & Water Resources and Natural Disaster Prevention (SWAN), 4. Department and Graduate School of Safety Health and Environmental Engineering, National Yunlin University of Science and Technology, 5. Department of Hydrology and Water Resources, The University of Arizona

In the groundwater study, it estimated the heterogeneous spatial distribution of hydraulic properties, there were many scholars use to hydraulic tomography (HT) from field site pumping tests to estimate inverse of heterogeneous spatial distribution of hydraulic properties, to prove the most of most field site aquifer was heterogeneous hydrogeological parameters spatial distribution field. Many scholars had proposed a method of hydraulic tomography to estimate heterogeneous spatial distribution of hydraulic properties of aquifer, the Huang et al. [2011] was used the non-redundant verification analysis of pumping wells changed, observation wells fixed on the inverse and the forward, to reflect the feasibility of the heterogeneous spatial distribution of hydraulic properties of field site aquifer of the non-redundant verification analysis on steady-state model.

From past literature, finding only in steady state, non-redundant verification analysis of pumping well changed location and observation wells fixed location for inverse and forward. But the studies had not yet pumping wells fixed or changed location, and observation wells fixed location for redundant verification or observation wells change location for non-redundant verification of the various combinations may to explore of influences of hydraulic tomography method. In this study, it carried out redundant verification method and non-redundant verification method for forward to influences of hydraulic tomography method in transient. And it discuss above mentioned in NYUST campus sites the actual case, to prove the effectiveness of hydraulic tomography methods, and confirmed the feasibility on inverse and forward analysis from analysis results.

キーワード : Hydraulic Tomography、Redundant Verification、Heterogeneity、Inverse、Forward  
Keywords: Hydraulic Tomography, Redundant Verification, Heterogeneity, Inverse, Forward

## A constitutive model for gas hydrate-bearing soils with considering hydrate occurrence habits

\*Changfu Wei<sup>1,2</sup>, Rongtao Yan<sup>2</sup>

1. Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Guilin University of Technology

To exploit the resource of methane hydrate, it is crucial to understand the mechanical behavior of hydrate-bearing sediments. Here an elastoplastic constitutive model is developed for describing the mechanical behavior of gas hydrate-bearing soils (GHBS). To address the effect of the hydrate occurrence habits, the concept of the effective degree of saturation of the gas hydrate is introduced, and the effective stress stresses are redefined for describing the mechanical response of the GHBS. Within this context, a yield or loading function is developed with considering the bonding effect of gas hydrate, so that the yield function can expand or shrink as gas hydrate forms or dissociates. To describe more realistically the mechanical behavior of the GHBS, a non-associative flow rule is proposed by assuming the dilatancy to be a function of bonding stresses, suction stress and stress ratio. The proposed model are applied to analyze the mechanical responses of the GHBS with different hydrate occurrence habits under different environmental loadings. It is demonstrated that the proposed model can capture well the main features of the mechanical behavior of GHBS, including the hydrate-induced enhancements of stiffness, strength and dilatancy, the unsaturation-related characteristics and the hydrate occurrence habits dependency, showing that the proposed model is capable of describing the mechanical behavior of GHBS due to hydrate dissociation or under other environmental loadings.

## Factors affecting the leaching behaviors of magnesium phosphate cement-stabilized/solidified Pb-contaminated soil, Part II: Dosage and curing age

\*Wang Ping<sup>1</sup>, Xue Qiang<sup>1</sup>, Yang Zhenning<sup>2</sup>, Li Jiangshan<sup>1</sup>, Zhang Tingting<sup>1</sup>, Huang Qian<sup>1</sup>

\*Ping Wang<sup>1</sup>, Qiang Xue<sup>1</sup>, Zhenning Yang<sup>2</sup>, Jiangshan Li<sup>1</sup>, Tingting Zhang<sup>1</sup>, Qian Huang<sup>1</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Department of Civil and Environmental Engineering, University of Massachusetts Amherst

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Department of Civil and Environmental Engineering, University of Massachusetts Amherst

Magnesium phosphate cement (MPC) is frequently used to dispose synthetically spiked Pb contaminated soils by means of stabilization/solidification (S/S) technology. Leaching behaviors of heavy metal represent the most important parameters for MPC-treated metal-contaminated soil. Little information is available for the effectiveness evaluation and leaching mechanism investigation of MPC treatment. Moreover, various factors in the S/S process would affect its effectiveness, especially leaching behaviors. Part I presented the effect of original Pb concentration in soil and water-to-cement ratio on leaching behaviors of MPC treated synthetically spiked Pb contaminated soil, and this part investigated the effect of dosage and curing age on leaching behaviors of MPC treated waste. Leaching behaviors were investigated via Toxicity Characteristic Leaching Procedure (TCLP) and semi-dynamic leaching test about different MPC dosage and curing age. Results showed that both the MPC dosage and curing age would change the leaching behaviors of MPC treated synthetically spiked Pb contaminated soil. The TCLP leaching concentration of Pb decreased with the increasing MPC dosage and curing age. The calculated effective diffusion coefficients and leachability index indicated that the MPC treated Pb contaminated soil could be used for utilization after S/S treatment. The controlling leaching mechanism of Pb appeared to be diffusion for S/S products with different MPC dosage and curing age.

キーワード : Stabilization/solidification、 Leaching、 Water-to-Solid ratio、 Magnesium phosphate cement  
Keywords: Stabilization/solidification, Leaching, Water-to-Solid ratio, Magnesium phosphate cement

# Multi-scale Evaluation of the Solidification/Stabilization Technology for the Remediation of Zinc/Chlorine-Contaminated Soil

\*Yasong FENG<sup>1</sup>, Yanjun DU<sup>1</sup>, Weiyi XIA<sup>1</sup>, Mingli WEI<sup>1</sup>, Haoliang WU<sup>1</sup>, Weiwei REN<sup>1</sup>

1. Jiangsu Key Laboratory of Urban Underground Engineering & Environmental Safety, Institute of Geotechnical Engineering, Southeast University.

Solidification/Stabilization methods are routinely used in the remediation of contaminated land. Laboratory scale environmental remediation of contaminated land and groundwater has previously been studied by many researchers. However, there are not any studies on larger scale experiments involving applications in the field. Moreover, the immobilization mechanisms of pollutants are not described in multi-scale to give more detailed interpretation.

This study presents a systematically multi-scale investigation of the immobilization effects of two binders (GM and KMP) on zinc and chlorine contaminated soil from an abandoned galvanizing mill in Jiangsu province, China. The physical-chemical properties including dry density, soil pH, dynamic cone penetrometer, unconfined compression strength and toxicity leaching properties were tested on the treated soil at 1-28 days of curing after in-situ application of solidification and stabilization. Furthermore, laboratory tests, such as the modified BCR sequential extraction procedure, X-ray diffraction, scanning electron microscope and energy dispersive spectroscopy tests, were also conducted to investigate the immobilization mechanism of Zn or/and Cl in both the GM and KMP binders treated soils.

The results demonstrate that the dry density of stabilized soil has a significant increase of 10.68%-12.21% after 28 days of curing. Corresponding with the dry density, the strength of stabilized soil is about 5-7 times higher than that of the untreated soil treated after 28 days of curing. With the addition of binders, the pH of treated soils increases to 6.75-6.96 from 4.23 after 28 days of curing. Moreover, the two binders have different immobilization effects on zinc and chlorine in the contaminants soils, as KMP is better on immobilizing zinc, while GM has a stronger ability on immobilization of chlorine.

In addition, the production of  $Zn_3(PO_4)_2$ ,  $Zn(OH)_2$ ,  $CaZn_2(PO_4)_2$ ,  $CaZn_2(OH)_6 \cdot 2H_2O$ ,  $Mg_2Cl(OH)_3 \cdot 4H_2O$ ,  $CaCl(OH)$ ,  $Ca_5(PO_4)_3Cl$  and  $Zn_5(OH)_8Cl_2$  are the most probable mechanisms in the KMP treated soil contaminated with Zn and Cl. However, in the GM treated soil, the production of  $Zn(OH)_2$ ,  $Ca(CO_3)_2(OH)_{17}Cl$ ,  $Mg_2(OH)_3Cl \cdot 4H_2O$ ,  $CaCl(OH)$  and  $Ca_8ZnSi_4O_{16}Cl_2$  are the most probable immobilization mechanisms for Zn and Cl. Furthermore, these results are interpreted based on the changes in chemical speciation of Zn and/or Cl in the treated soils.

Overall, this study demonstrates that the zinc and chlorine in soil can be effectively stabilized by both the two binders, and the leached toxicity of treated soil can meet the requirements for soil remediation. The outcomes of this research are significant from engineering, environmental and economic perspectives.

Keywords: zinc and chlorine contaminated soil, solidification/stabilization, bearing capacity, toxicity characteristic leaching characteristics, soil pH, immobilization mechanism



# Chemical Characteristic and Utilization of Coal Bed Methane Produced Water in Qinshui Basin, China

\*Qiyan Feng<sup>1</sup>, Xiangdong Li<sup>1</sup>, Yue Sun<sup>1</sup>, Ping Lu<sup>1</sup>

1. China University of Mining and Technology

Approximate 1/10 of coal bed methane resource reserves deposited in Qinshui Basin of Shanxi province, China. In 2015, the national ground extraction was 4.4 billion m<sup>3</sup>, of which 3 billion m<sup>3</sup> was produced from Qinshui Basin. Qinshui Basin has become one of China's most important coal bed methane development bases. The management of produced water (PW) associated with CBM production is a major environmental challenge of CBM industrialization. According to the statistics, the PW volume of CBM wells in Qinshui Basin ranges from 2.8~20.6 m<sup>3</sup>d<sup>-1</sup> in a single well, and the total volume was over 3 × 10<sup>4</sup> m<sup>3</sup>d<sup>-1</sup> by the end of 2015. Based on the water quality monitoring data the PW of coal bed gas field is divided into five categories: (1) PW with suspended solid (coal powder, rock powder and other suspended solids); (2) the flow back of fracturing fluid (suspended solids, high COD, complex organic matters); (3) PW with high salinity (high salinity, low level of Ca<sup>2+</sup> and Mg<sup>2+</sup>, but high level of Na<sup>+</sup>); (4) the PW with high fluoride; (5) PW with high iron and manganese. The chemical characteristics of PW in coal bed gas fields vary widely in different stages. The hydrochemical type of fracturing fluid flow back with total salinity of 4125.4-4965.1 mgL<sup>-1</sup>, is mainly characterized by Cl-Na type, high level of organic matter and COD (768.9-2003.2 mgL<sup>-1</sup>). The total salinity of the PW from the coal gas field in the normal production stage is 678.1-1621.7 mgL<sup>-1</sup>; the water quality is dominated by HCO<sub>3</sub>-Na; and the organic matter is low with COD of 2.1-92.7 mgL<sup>-1</sup>. According to the chemical type differences among different production stages, a coal bed methane production water treatment process and demonstration project was conducted. (1) Treatment of PW from recovery stage with fracturing fluid: multiple oxidation method involving iron micro-electrolysis-Fenton combined can be used, and effluent could meet water discharge requirement. In addition, effluent can be deeply treated for a production and living usage. (2) Treatment of PW during normal production stage: The flocculation-precipitation technology was applied and effluent was discharged when it met the standard. Additionally, reverse osmosis technology can be used for drinking purpose.

Keywords: Coal bed methane produced water, Water chemical type, Wastewater treatment

## A transient numerical model for multi-component gas transport in landfill cover soils

Xinru Zuo<sup>1</sup>, \*Haijian Xie<sup>1</sup>, Yunmin Chen<sup>1</sup>, Shijin Feng<sup>2</sup>

1. Zhejiang University, 2. Tongji University

The landfill gas consists of methane, carbon dioxide, hydrogen sulfide, ammonia and numerous volatile organic compounds. The transport and interact between multicomponent gas in the soil cover layer of the landfills are of great importance. Based on DGM (dust-gas-model) and mass balance equation, a one-dimensional transient multi-component gas transport model in landfill cover soils was developed for the first time. The methane oxidation in the soils is considered in the model. The numerical model was solved by the finite element method based program COMSOL Multiphysics V5.0. The numerical result consists well with the laboratory soil column experiments, which was conducted to simulate four-component ( $\text{CH}_4$ ,  $\text{CO}_2$ ,  $\text{O}_2$  and  $\text{N}_2$ ) gas transport in landfill cover system. The parameter analysis shows that, ordinary diffusion plays an important role in transport process. For methane and carbon dioxide, ordinary diffusion contributes 97% of the total transport flux at the top soil. The effect of ordinary diffusion decreases with the increase of depth. The ordinary diffusion contributes 50%-60% of the flux at the bottom. The influence of advection becomes more important when the depth increases. Advection contributes 37% to the flux at the bottom of the cover soil. On the contrary, the effect of Knudsen diffusion is relatively week. It contributes 0.5%-12% to the total flux. This is due to the relatively large gas permeability of the cover soils. Advection becomes important when gas permeability increase. The effect of advection is comparable to diffusion when the gas permeability increases up to  $3\text{e-}13\text{m}^2$ . Methane oxidation rate is found to increases by 5 times when gas permeability increase from  $3.5\text{e-}12\text{m}^2$  to  $3.5\text{e-}11\text{m}^2$ . The numerical solution can be used for multi-component landfill gas transport in the soils and can also be used for the design of landfill cover system with respect to gas pollution control.

Keywords: landfill, multi-component gas transport, methane oxidation, numerical model, column test

# The Geothermal Opportunity in Taiwan

\*Sheng-Rong Song<sup>1</sup>, Yi-Chia Lu<sup>1</sup>

1. Department of Geosciences, National Taiwan University

Currently, the installed capacity and gross electricity productions of power structures in Taiwan are 40.79 GW and 219.2 billion kWh, respectively. Among them, the nuclear power plants occupy 12.61% and 18.61 % for installation and production, respectively. There are three nuclear power plants, named No. 1, 2 & 3, in operations and one (No. 4) is under construction, but is stopped and sealed now in Taiwan. Furthermore, the life-span of 40-year operation for those three power plants will be close-at hand and retire in 2018-2019, 2021-2023 and 2024-2025, respectively. Therefore, to find alternative energy sources, especially on the clean, renewable and sustainable ones for generating electricity are emergent and important for Taiwan's government in next few years. Among various energy sources, geothermal energy can be as base-load electricity and offers an opportunity for a country with naturally free-resource and less dependence on fossil fuel. However, development of geothermal energy has been stopped for more than 30 years, and currently no working geothermal power plant existed in Taiwan. To jump-start the geothermal exploitation rather than solely rely on knowledge, we also need to introduce the techniques from outside of this country. It provides you not only to know what the geothermal situation is, but also to find the collaborating and business opportunities in Taiwan.

Located in the west Pacific Rim of Fire, Taiwan possesses rich geothermal resources due to volcanic activities and rapid uplifting of plate collision. Based on available data prior to 1980, Taiwan may have about 1 GWe of potential shallow geothermal energy. A 3-MW pilot power plant, therefore, was constructed in 1981 and terminated in 1993 in the Chingshui geothermal field of Ilan, northeastern Taiwan. Recently, one of the National Science & Technology Program (NSTP) projects has been conducting research and reevaluating the island-wide deep geothermal energy. We found that the geothermal resource in Taiwan may be as high as 33.6 GWe of exploitable geothermal energy. There are no any commercial geothermal power plants until now in Taiwan, although the potential is great. However, geothermal energy has been listed as one of major tasks of National Energy Program, Phase II (NEP-II) in Taiwan. We will conduct more detailed geothermal energy surveys on some proposed hot sites in a few years.

Keywords: Taiwan, Geothermal potentials , Chingshui Geothermal Field

## Combined use of numerical simulation and natural tracer approach to estimate groundwater flow system in a typical arid inland river basin, northwest China

\*Jingli Shao<sup>1</sup>

1. China University of Geosciences-Beijing

Groundwater plays a crucial role in arid and semi-arid areas of the world. To obtain a better understanding and quantification of groundwater flow in arid and semi-arid inland river basins, a variably saturated numerical model of a typical arid watershed profile in Qaidam basin was constructed using the code TOUGH2 (Transport of Unsaturated Groundwater and Heat 2). Considering the dramatic change of saturated/unsaturated state near surface in the alluvial-lacustrine plain (midstream and downstream river basin), the mesh near surface is refined compared to the previous studies, and the minimum cell size is 0.1 m in thickness. Natural isotopes (such as radiocarbon and tritium) as well as hydraulic heads were used to calibrate the numerical model. The reliability of the calibrated model was further validated by comparing the results of the numerical simulation and an independent isotopes method. The results indicate that the calibrated model can efficiently reflect the characteristics of groundwater flow system at basin scale. While the natural tracer approaches are more reliable at point scale. According to the travel paths of groundwater simulated by the calibrated model, three groundwater flow systems are distinguished: the local, intermediate and regional groundwater flow system. The circulation depth, groundwater residence time as well as water circulation amount of each groundwater flow system were also calculated with the numerical model. This study demonstrates that combined use of natural tracers and hydraulic data in the numerical model calibration can construct a more reliable model and achieve better understanding and qualification of basin-scale groundwater flow.

Keywords: Numerical simulation, Tracer approach, Variably saturated, Groundwater flow, Arid area, Qaidam basin

# Regional groundwater resource evaluation of Golmud River watershed in the south margin of Qaidam Basin, northwest China

\*Yali Cui<sup>1</sup>

1. China University of Geosciences-Beijing

In the arid and semi-arid area, due to scarce of precipitation and strong evaporation, groundwater becomes not only an important source of water supply but also the safeguard water of the vulnerable eco-environment.

Golmud River watershed is located in the south margin of Qaidam Basin. According to the previous researches, the piedmont alluvial fan deposits thick sand and gravel, which is a good groundwater storage site and have abundant groundwater. In the groundwater overflowing belt, groundwater overflow into spring-fed river because of the rise of groundwater level, and the vegetation development; the whole groundwater is basically in the original state. On the basis of thorough analysis of the hydrogeological conditions, we establish groundwater flow numerical simulation model under unsteady flow by using GMS to determine the Qaidam basin groundwater quantity and analyze the influence of groundwater exploitation on the ecological environment of the overflow zone in Golmud River watershed. The results indicate that the amount of the average annual recharge of the Golmud River watershed accounts for  $6.4 \times 10^8 \text{m}^3/\text{a}$ . Based on the water use plan, three kinds of groundwater exploitation schemes with quantity of  $0.96 \times 10^8 \text{m}^3/\text{a}$ ,  $2.92 \times 10^8 \text{m}^3/\text{a}$  and  $3.65 \times 10^8 \text{m}^3/\text{a}$  were provided. With the increasing exploitation of groundwater, river infiltration basically keeps constant, the groundwater level drops to a certain extent, evaporation will reduce and oasis area will shrink back and retreat. The prediction results of different exploitation schemes show that groundwater exploitation mainly comes from spring discharge, the evaporation of phreatic water, and groundwater storage. Compared to the first mining plan, other schemes distribution area of vegetation suitable water level is reduced by 17% and 23% respectively. Compare the results of different exploitation schemes, we decide the exploitable quantity of groundwater, which is  $2.92 \times 10^8 \text{m}^3/\text{a}$ . This research can provide a scientific basis for the rational development and utilization of water resources and ecological environment protection.

Keywords: Golmud River watershed, groundwater resource evaluation, numerical simulation

# The role of transients in ionic strength in colloid remobilization in saturated porous media

\*Qiulan Zhang<sup>1</sup>

1. China University of Geosciences-Beijing

The deposition and remobilization of soil colloids in groundwater are important with respect to the environmental fate of contaminants and the remediation of subsurface contamination. We conducted a series of column experiments to investigate the effect of solution ionic strength on colloid transport and remobilization. In the experiment, model colloids-Polystyrene latex microspheres with diameter of 1  $\mu\text{m}$  were employed, quartz sand packed column was used as porous medium. During the experiment, ionic strength was changed from 50mM to 10mM, 60mM to 20mM, 70mM to 30mM, then to ultrapure water, or reduced from 50mM, 60mM, 70mM to ultrapure water directly.

We found that colloid remobilization occur under the condition of transients in ionic strength. When ionic strength was 50mM, 3.88% percent of the attached colloid was remobilized after it changed to 10mM. When ionic strength was 60mM, 0.71% percent of the attached colloid was remobilized after it changed to 20mM. When ionic strength was 70mM, 0.07% percent of the attached colloid was remobilized after it changed to 30mM. When ionic strength was reduced from 60mM to 10mM, 20mM, 30mM respectively, the corresponding remobilization rate was 1.75%, 0.71%, 0.09%, the total remobilization rate was 52.12%, 50.86%, 42.73% respectively after injecting to ultrapure water.

We concluded that the amount of colloid remobilization was related to the magnitude of the change in ionic strength.

Keywords: transients in ionic strength, colloid remobilization, saturated steady-state flow

## Abnormal drawdown behavior in pumping tests with exponentially decayed rates of abstraction in confined aquifers

\*Zhang Wen<sup>1</sup>, Hongbin Zhan, Quanrong Wang, Yiqun Gan

1. China University of Geosciences, Wuhan

Actual field pumping tests often involve variable pumping rates which cannot be handled by the classical constant-rate or constant-head test models, and often require a convolution process to interpret the test data. In this study, we proposed a semi-analytical model considering an exponentially decreasing pumping rate started at a certain (higher) rate and eventually stabilized at a certain (lower) rate for cases with or without wellbore storage. A striking new feature of the pumping test with an exponentially decayed rate is that the drawdowns will decrease over a certain period of time during intermediate pumping stage, which has never been seen before in constant-rate or constant-head pumping tests. It was found that the drawdown-time curve associated with an exponentially decayed pumping rate function is bounded by two asymptotic curves of the constant-rate tests with rates equaling to the starting and stabilizing rates, respectively. The wellbore storage must be considered for a pumping test without an observation well (single-well test). Based on such characteristics of the time-drawdown curve, we developed a new method to estimate the aquifer parameters by using the genetic algorithm.

Keywords: Analytical solutions, Variable rate, Pumping test, Laplace transform

## Leaching recovery of gallium from waste LED chip

\*Ching-Hwa Lee<sup>1</sup>, Kuan-Neng Huang<sup>1</sup>, Shima L Holder<sup>1</sup>, Chang-Mao Lee<sup>1</sup>, Lakshmi Prasanna Nalluri<sup>1</sup>

1. Dept. Of Environmental Engineering, Da-Yeh University

The purpose of this research is to analyze the composition and to study the leaching recovery of gallium (Ga) from waste LED (light-emitting diodes) chip by different leaching reagents. The waste LED chip used in this research is generated during the production of light-emitting diodes chip. The composition analysis result of this research shows that the collected LED chip contains 456 mg/kg of Ga. The water, ash and combustible contents of this collected chip are 0.30%, 82.05% and 17.65%, respectively. In order to recover the valuable Ga contained in the chip, a leaching method is adopted in this research. There are 4 leaching reagents of nitric acid, hydrochloric acid, sulfuric acid and sodium hydroxide are used to study the leaching recovery of Ga from the collected LED chip. The leaching results of aforementioned leaching reagents will be introduced in this research.

Keywords: Leaching, Gallium, Recovery



# Leachability, strength and microstructural characteristics of CPC binder stabilized Pb, Zn and Cd contaminated industrial soil

Weiwei XIA<sup>1</sup>, Yanjun DU<sup>1</sup>, \*Yasong FENG<sup>1</sup>, Weiwei REN<sup>1</sup>

1. Institute of Geotechnical Engineering, Southeast University

Synthetic hydroxyapatite is used as an immobilization material to remediate heavy metals in soil and show promising performance of reducing the leachability. However, hydroxyapatite stabilization technology has several drawbacks including the high cost of raw material, difficult in preparation, as well as poor mechanical properties of stabilized matrix. This study presents a new binder, CPC, composed of calcium oxide and single superphosphate. The CPC can effectively solidify and stabilize contaminated soil through acid-base reaction with a final product of hydroxyapatite in the soil. A comprehensive laboratory investigation is carried out with respect to the effect of the CPC content and curing time on the pH, leachability and strength properties of Pb, Zn and Cd contaminated industrial soil stabilized with CPC binder. In addition, microcosmic studies including sequential extraction procedure, X-ray diffraction, scanning electron microscopy, and mercury intrusion porosimetry are undertaken to interpret the mechanisms controlling the changes in leachability, strength properties of the stabilized soils. The results show that the soil pH and unconfined compressive strength increase with an increase in CPC content and curing time. The CPC stabilized soils exhibit an alkaline character regardless of the binder content. After cured for 28 days, the strength of CPC stabilized soils is 2.21 to 5.68 times that of the untreated soils. For all stabilized soils, the leachability of Pb, Zn and Cd is effectively reduced and the corresponding leached concentrations can meet the regulator limit. Moreover, CPC can significantly reduce acid soluble fractions of heavy metals and transfer them to residual fractions in the stabilized soils. The CPC also significantly reduce the pore volume and change the pore-size, which can well explain the measured impact of CPC content on the compressive strength of stabilized soils. It is also found that the formation of heavy metals hydroxyapatite and phosphate-based products are the major immobilization mechanisms for Pb, Zn and Cd in soils.

Keywords: Heavy contaminated soils, Leachability, Strength, Hydroxyapatite, Single superphosphate, Solidification and stabilization

# カルシウム酸化物及び水酸化物によるヒ素汚染水からの亜ヒ酸除去 Removal of Arsenite from Arsenic Contaminated Water using Calcium Oxide and Hydroxide

\*杉田 創<sup>1</sup>、張 銘<sup>1</sup>

\*Hajime Sugita<sup>1</sup>, Ming Zhang<sup>1</sup>

1. 国立研究開発法人 産業技術総合研究所

1. National Institute of Advanced Industrial Science and Technology

発展途上国の一部の地域では、ヒ素によって汚染された地下水を飲料水として利用しているため、健康被害をもたらす可能性が高く大きな問題となっている。著者らはこれまでヒ素の中でも5価ヒ素であるヒ酸に着目したヒ素除去試験を中心に研究を実施してきた。本研究では、5価ヒ素よりも毒性が高い3価ヒ素である亜ヒ酸を対象として、酸化カルシウム及び水酸化カルシウムを用いて実施したヒ素除去試験の結果について報告する。

キーワード：亜ヒ酸除去、吸着材、酸化カルシウム、水酸化カルシウム

Keywords: Arsenite Removal, Adsorbent, Calcium Oxide, Calcium Hydroxide

## 土質材料及びバイオ資材を活用した透過性反応壁材料の検討

### Development of permeable reactive barrier system utilizing locally available geo- materials and bio resource in Sri Lanka: Characterizing of heavy metal adsorption and water permeability

\*齋藤 瑠緯<sup>1</sup>、齋藤 健志<sup>1</sup>、Udayagee Kumarasinghe<sup>1</sup>、Ganila Paravithana<sup>1</sup>、川本 健<sup>1</sup>

\*Rui Saito<sup>1</sup>, Takeshi Saito<sup>1</sup>, Udayagee PubuduPriya Kumarasinghe<sup>1</sup>, Ganila N Paravithana<sup>1</sup>, Ken Kawamoto<sup>1</sup>

1. 埼玉大学大学院理工学研究科

1. Graduate School of Science and Engineering, Saitama University, Japan

Open dumping is the common method for final waste disposal used in many developing countries. Various kinds of heavy metals often detected in landfill leachate and groundwater surrounded at open dumpsites in Sri Lanka. Thus leachate and groundwater treatment facilities are strongly recommended in order to prevent contamination of natural ecosystem. Permeable Reactive Barrier (PRB) systems might be an effective method to treat contaminated water at open dumpsites, which required low initial cost, maintenance cost and technical support. Therefore, the objectives of this study were to characterize the heavy metal adsorption and permeability performances of low-cost filling materials (soil, biochar, crushed brick, and their mixed samples) locally found in Sri Lanka. Adsorption isotherms of Pb and Cd for tested materials showed that the maximum adsorption capacities and removal percentages of Pb were higher than those for Cd. The brick mixed samples showed less adsorption capacities compared to the non-brick mixed samples because of the low adsorption capacity of brick. On the other hand, the brick mixed samples showed the highest water permeability and exceeded the targeted hydraulic conductivity of 10-3 cm/s, under relatively high compaction degree of 75%. This suggests that the mixing of brick with soil and biochar is effective to satisfy a required water permeability of filling materials for the PRB systems.

キーワード：反応性浸透壁、重金属、吸着特性、透水係数、浸出水

Keywords: Permeable reactive barrier (PRB), Heavy metals, Adsorption, Hydraulic Conductivity, Leachate

## Analysis of pore structure for different textured soils by Micro-focus X-ray CT system

\*森野 大樹<sup>1</sup>、川本 健<sup>1</sup>、斎藤 健志<sup>1</sup>

\*Daiki Morino<sup>1</sup>, Ken Kawamoto<sup>1</sup>, Takeshi Saito<sup>1</sup>

1. 埼玉大学理工学研究科

1. Graduate School of Science and Engineering, Saitama University

Understanding mass transport properties in soils is important to develop techniques. The mass transport properties can be controlled by soil pore structure. The many analyses by visualization techniques for soil pore structure including a micro-focus X-ray CT system were carried out. However, few reports are available on the examinations of correlations between pore structure parameters and mass transport parameters. In this study, we visualized pore network for different textured soils by using Micro Focus X-ray CT system (inspeXio SMX-90CT, Shimadzu Corporation, Japan) and analyzed pore structure parameters (mean effective pore radius( $r_{\text{eff}}$ ), pore coordination number( $N$ ), and pore tortuosity( $T_{zz}$ )). Moreover, we measured gas diffusivity( $D_p/D_0$ ) and air permeability( $k_a$ ) as mass transport parameters. Different textured soils including sand, loam, and silty clay loam were used. The sand samples with different particle shape were packed at different densities. Similar to sand samples, the loam samples were packed. Undisturbed silty clay loam soils were collected from two different positions of an apple orchard, and two conditions (field water content and air dried after freeze drying) was used. As a result, gas diffusivity increased with decreasing effective pore radius for the all dry samples. Correlations between effective pore radius and mean particle size have been reported. Thus, this results suggest that gas diffusivity is controlled by mean particle size. On the other hand, the gas diffusivity values of moist silty clay loam taken from alley area in apple orchard are lower than these of dry samples. Blocking by water in soil occurs the degradation of gas diffusion ability.

キーワード：マイクロフォーカスX線CT装置、間隙構造、物質移動係数

Keywords: Micro focus X-ray CT system, pore structure, mass transport coefficients

## Preliminary environmental magnetic results of pedogenic processes in mine waste during plant growth.

\*川崎 一雄<sup>1</sup>、蒲池 浩之<sup>1</sup>、酒井 英男<sup>1</sup>

\*Kazuo Kawasaki<sup>1</sup>, Hiroyuki Kamachi<sup>1</sup>, Hideo Sakai<sup>1</sup>

1. 富山大学大学院理工学研究部（理学）

1. Graduate School of Science and Engineering for Research, University of Toyama

The historic Kamegai Pb-Zn-Ag deposit at Mt. Hachibuse in Toyama, Japan, was mined between 1567 and 1926, leaving considerable mine waste in the region. This mine waste may generate acidic ground water containing high concentrations of sulphide and metals. Environmental magnetic results are reported here on the changes in magnetic properties of the Kamegai mine's waste from the growth of the fern, *Athyrium yokoscense*. This fern is known to flourish at sites that are highly polluted with heavy metals such as cadmium, copper, lead and zinc. Six mixtures were prepared from two different soil types, mine waste and synthetic soils of mountain sand, vermiculite and artificial magnetite powder. One mixture of each soil type is a control soil sample without any fern and the other four were planted with *Athyrium yokoscense*. In-field magnetic susceptibility measurements of the soil surfaces were done about once a week for 20 weeks. Overall, the mean magnetic susceptibility of soils with ferns decreased more than the control soils without ferns. However, there is no obvious correlation between the decay rates of susceptibility and plant growth. After 20 weeks the soils were collected for further rock magnetic analyses. Higher mass susceptibilities were observed in soils with the fern, especially near the fern's roots. More rapid stepwise isothermal remanent magnetization acquisition curves as well as alternating field demagnetization decay curves were observed in the soils with ferns, indicating that more low coercivity magnetic minerals, such as magnetite, were generated in these soils. Therefore, the mass susceptibilities appear to show magnetic enhancement by pedogenic processes. Conversely, the in-field magnetic susceptibility measurements for which the lower magnetic susceptibility were observed in the soils with ferns likely detect the spatial distribution of the fern's roots.

キーワード：環境磁気、土壌生成、ヘビノネゴザ

Keywords: Environmental magnetism, Pedogenesis, *Athyrium yokoscense*

## Geotechnical properties for waste mixed materials

\*橋本 健人<sup>1</sup>、Abeywickrama Piumali<sup>1</sup>、斎藤 健志<sup>1</sup>、川本 健<sup>1</sup>

\*Kento Hahimoto<sup>1</sup>, Piumali Abeywickrama<sup>1</sup>, Takeshi Saito<sup>1</sup>, Ken Kawamoto<sup>1</sup>

1. 埼玉大学大学院理工学研究科

1. Graduate School of Science and Engineering, Saitama University, Japan

Waste disposal sites are essential infrastructure facilities for human and industrial activities. However, it is difficult to construct new disposal facilities due to the lack of land and the public opposition surrounding. Therefore, an effective use of limited space in existing waste disposal sites is highly needed. The control of geotechnical properties such as compaction, consolidation, and shear strength of waste materials is important to reduce disposal space. In this study, geotechnical properties such as basic physical, chemical, and mechanical properties such as compaction, consolidation, and un-drained shear strength were investigated for waste mixed materials of sludge with less than 2.0mm, crushed concrete with the fraction 2.0mm and 9.5mm, and incineration ash with the fraction less than 2.0mm. The materials were mixed with various proportions based on mass ratio. First, mixed materials were compacted by the standard proctor method to achieve 90% degree of compaction. Then, the compacted samples were used for the oedometer test and the Consolidation-Undrained triaxial compression test. The sample size for the consolidation test was 10 cm in diameter and 10 cm in height. The sample size for the triaxial compression test was 10 cm in diameter and 20 cm in height. The triaxial compression test was carried out under three confining stresses of 50, 100, and 150kPa, and the strain rate was maintained as 0.1% per minute. Results show the maximum dry density increased with decreasing the mixing proportion of sludge and the optimum moisture content decreased with decreasing the mixing proportion of sludge. For the mixed materials of sludge and crushed concrete or incineration ash, measured friction angles showed positive linear relations with increasing the mixing proportion of crushed concrete or incineration ash irrespective of different particle size distributions for crushed concrete and incineration ash. Compression index for the mixed materials of sludge and incineration ash linearly decreased with decreasing the mixing proportion of sludge, while for the mixed sample containing crushed concrete, they rapidly decreased with decreasing the mixing proportion of sludge. Therefore, it is highly important to mix the crushed concrete for increasing the strength of waste materials.

キーワード：汚泥、コンクリートから、焼却灰混合材料の地盤工学的特性の評価

Keywords: Evaluation of Geotechnical Properties for Mixed Materials of Sludge, Crushed Concrete, and Incineration Ash

## Experimental study on engineering characteristic of alkali-activated slag - bentonite backfills for vertical slurry cutoff wall

\*Haoliang Wu<sup>1,2</sup>, Yanjun Du<sup>1</sup>, Run Zhang<sup>1</sup>, Jing Ni<sup>1</sup>, Yasong Feng<sup>1</sup>

1. Southeast University, 2. University of Michigan

In this study, alkali-activated slag and bentonite (GMB) are mixed and used to form backfills for vertical slurry cutoff wall. For the purpose of redevelopment and utilization of contaminated site, engineering characteristic of GMB backfill has been research. The slump tests, unconfined compressive strength test, direct shear test and permeability test have been conducted under different content of sand-soil ratio, MgO-activated slag, bentonite and different curing time. The slump test results show that standard slump of GMB backfill is well liner to mini slump. It is found that the values of mini slump are 25.5 to 75.5 mm when the GMB backfill meet the workability of construction. The Unconfined compressive strength test show that, the  $q_u$  of GMB specimens are increased with the curing time and content of MgO-activated slag, and the content of bentonite is weakly influence the  $q_u$ . The direct shear test show that, the cohesive force of GMB specimens are increasing remarkably when the curing time from 14 d to 28d and the content of MgO-activated slag increased from 5% to 15%. Moreover, the ratio of sand-soil decreased result in cohesive force increasing. The friction of GMB specimens increased with the content of MgO-activated slag and sand-soil ratio, however, it would be decreased slightly with curing time and the content of bentonite. In the last, the permeability result of GMB show that the GMB has a significant effective on cutoff groundwater flow and it can reach the permeability of  $1 \times 10^{-7}$  to  $1 \times 10^{-9}$  m/s.

Keywords: alkali-activated slag, bentonite, engineering characteristic, cutoff walls

## The simulation of the oxygen transport with injection well operation in landfill

\*Liu Lei<sup>1</sup>, Tian Yu<sup>2</sup>, Dong Yi<sup>3</sup>, Xue Qiang<sup>1</sup>

\*Lei Liu<sup>1</sup>, Yu Tian<sup>2</sup>, Yi Dong<sup>3</sup>, Qiang Xue<sup>1</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Wuhan Environment Investment & Development Co., Ltd., 3. Henan BCCY New Power Industry Co., Ltd.

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Wuhan Environment Investment & Development Co., Ltd., 3. Henan BCCY New Power Industry Co., Ltd.

Evaluation of oxygen distribution during aeration in landfill was very important to determine the design parameters of injection well. The coupling model described gas preferential transport in landfill was developed, which linked the effect of advection-diffusion and oxidation reaction and mass exchange between the fracture and matrix system. Combined with the typical cases in field site, the quantitative simulation of the variation of gases distribution during vertical well aeration in short term was presented. The sensitivity of the parameters in the coupling model to gas transport was addressed. The simulation result shown that the oxygen and methane concentration during aeration was represented by using the dual advective-diffusive model (DAD model). The aeration radius achieved by DAD model was closer to the measurement value. It was underestimated by single advective-diffusive model (SAD model). The mass transfer volume between the fracture and matrix system greatly contributes to gas preferential flow effect in landfill. The aeration radius (AR) was obviously influenced by the diffusion coefficient. It will provided evidence for optimum design of gas injection well in aerobic landfill.

キーワード : preferential flow、 modeling、 oxygen transport、 landfill

Keywords: preferential flow, modeling, oxygen transport, landfill



## Study on the Compacted Clay Line Shrinkage Crack Characteristics and Crack Soil Representative Elementary Volume

\*Wan Yong<sup>1</sup>, Xue Qiang<sup>1</sup>, Liu Lei<sup>1</sup>, Zhao Li-ye<sup>1</sup>, Zeng Gang<sup>1</sup>

\*Yong Wan<sup>1</sup>, Qiang Xue<sup>1</sup>, Lei Liu<sup>1</sup>, Li-ye Zhao<sup>1</sup>, Gang Zeng<sup>1</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences

The shrinkage cracking is a main reason causing of compacted clay liner (CCL) anti-seepage failure in a landfill final cover. In this paper, six soils with different liquid limit (LL) were obtained by combining two natural soils, and the cracking characteristics and representative elementary volume (REV) size were studied by large scale model experiments. The results show that: With 50% liquid limit is bounded, there has a piecewise linear relationship between crack characteristic parameters (i.e. crack rate and crack length) and soil liquid limit, and the slope at  $LL < 50\%$  is bigger than the slope at  $LL > 50\%$ . The crack elementary volume (CEV) size of CCLs all accord with normal distribution, which the expectation and the mean square error linearly reduce with the increase LL when  $LL < 50\%$ , while those change is not obvious when  $LL > 50\%$ . The REV size decrease linearly with increase soil LL ( $REV = 90.5 - 1.6LL$ ) for low liquid limit soil, while the change of the REV size is non-significant and it is approximately equal to 10 cm for high liquid limit soil.

## Soil Water Characteristic Curve and Pore Size Distribution of Life Source Contaminated Clay

\*Liwen CAO<sup>1</sup>, Yong WANG<sup>2</sup>, Yuliang GUO<sup>1</sup>

1. China University of Mining and Technology, 2. College of mining, Liaoning Technical University

With the diffusion and migration of life source contaminants, the soils experience the variation of moisture state from unsaturation to saturation, and produce complicated physical, chemical and biological reactions, thus transforming the soil properties and structure. Therefore, the investigations on the migration patterns of contaminants in soils, as well as the induced variation in the properties and structure of unsaturated soils at various depths, lay the premise and foundation about the evaluation of environmental effects and engineering geological properties of soils during the migration of contaminants. Based on the physical migration model construction of life source contaminants, life source contaminated clays at various depths were prepared. Subsequently, the soil water characteristic curves of uncontaminated and life source contaminated clay were tested and compared. Furthermore, the pore size distribution of life source contaminated clay was theoretically calculated by means of small incremental method. Meanwhile, the microstructure of life source contaminated clay was observed using scanning electron microscope. The pore size distribution of life source contaminated clay was then quantified and analyzed in order to compare with the theoretical calculation results. Finally, the evolution mechanisms of the clay saturation degree and pore size distribution during the migration of contaminants were revealed. The studies demonstrate that, the life source contaminated clay possesses higher dry density and water content than uncontaminated clay. Meanwhile, with the increase of depth, the life source contaminated clay possesses increasingly low gravimetric water content, wet density and dry density, as well as high saturated gravimetric water content, saturated volumetric water content and saturated permeability coefficient. The soil water characteristic curves (SWCCs) of uncontaminated and life source contaminated clay can be divided into boundary effect region, transition region and residual region. Moreover, the SWCCs of life source contaminated clay intersect with each other, and become steeper and closer to that of uncontaminated clay with the increase of depth. The pore size distribution of life source contaminated clay calculated using small incremental method based on SWCCs is basically consistent with that quantified using MATLAB based on microstructure images. Specifically, with the increase of depth, the life source contaminated clay possesses larger pore size, worse pore uniformity, as well as the pore size distribution transformed from mainly meso- and mini-pores to mostly macro- and meso-pores with the pore size peaks in the range of 5-20  $\mu\text{m}$ . Finally, such effects produce during the migration of life source contaminants in clay as the adsorption of clay particles to organic matters and suspended solids, the complicated chemical reactions between life source contaminants and clay, as well as the formation of biofilms, and induce the reduction of clay porosity and pore size, as well as the increase of clay matric suction, thus inhibiting the migration of life source contaminants gradually.

Keywords: life source contaminated clay, unsaturation, SWCC, pore size distribution

## Effects of $\gamma$ -rays irradiation aging on the mechanical strength and swelling properties of natural GMZ sodium bentonite

\*Mao Haijun<sup>1</sup>、Liu Peng<sup>2</sup>、Yang Chunhe<sup>1</sup>、Yang Zhongtian<sup>3</sup>、Wang Guibin<sup>1</sup>、Liu Wei<sup>3</sup>

\*Haijun Mao<sup>1</sup>、Peng Liu<sup>2</sup>、Chunhe Yang<sup>1</sup>、Zhongtian Yang<sup>3</sup>、Guibin Wang<sup>1</sup>、Wei Liu<sup>3</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences、2. School of Civil Engineering and Architecture, Southwest University of Science and Technology、3. China Institute for Radiation Protection

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. School of Civil Engineering and Architecture, Southwest University of Science and Technology, 3. China Institute for Radiation Protection

Bentonite was often used as the back filling materials in high-level radioactive waste geological disposal. In order to study the effect of gamma irradiation on the mechanical strength and swelling properties, some experiments was taken on the natural of bentonite sodium Na-bentonite, from Gaomiaozhi(GMZ), Inner Mongolia. The bentonite samples were performed at different cumulative doses of electron irradiation aging at room temperature firstly. Then by D8 Advance X- ray diffraction, the mineral composition of bentonite was detected and analyzed. And then triaxial shear test and swelling test were conducted to study the evolution law of the mechanical strength and deformation characteristics before and after irradiation. Results showed that mineral components changed after  $\gamma$ -rays irradiation in bentonite. The microstructure of montmorillonite changed and transformed to the stable silicate and aluminosilicate minerals. After irradiation, with the increase of the irradiation dosage under the same confining pressure, the shear strength of bentonite increased, and the peak shear strength of bentonite had gradually increased, due to the change in the mineral composition. With the increase of confining pressure, the strength increase trend gradually slow, and the effect of irradiation dose on the strength turned to be weaken, which indicates that the confining pressure inhibited the strength growth Bentonite. Due to the decrease of montmorillonite content after different irradiation effects, the expansion force of bentonite was also weakened in logarithmic law. The free expansion and loaded expansion strain decreased in different ratios. The expansion deformation ratio decreased slowly till it reached to a constant.

キーワード : irradiation aging、 Na-bentonite、 montmorillonite、 mechanical strength、 swelling property  
Keywords: irradiation aging, Na-bentonite, montmorillonite, mechanical strength, swelling property

## Availability of natural attenuation of persistent organic compounds in acid sulfate soils distributed in a coastal area

\*淳子 原<sup>1</sup>

\*Junko Hara<sup>1</sup>

1. 産業技術総合研究所

1. National Institute of Advanced Industrial Science and Technology

Coastal acid sulfate soils are naturally generated sediments, mainly containing iron sulfides. When this soil exposure to air, they undergo leaching of sulfuric acid due to the oxidation of iron sulfides. The oxidation has an undesirable influence on plants and ecosystems, and serious damaged sites are artificially remediated. However, iron sulfides also have the potential to degrade toxic VOCs (Volatile Organic Compounds) and persistent organic compounds. These remediation properties have only been observed in laboratory experiments. This study investigated the natural distribution of acid sulfate soils at the mouth of a river, and their remediation ability. These soils are distributed a small scale in southern Japan; Iriomote Island was used as the study site. Coastal acid sulfate soils were found from the surface in the downstream portions and decreased the distribution in the upstream. The surficial acid sulfate soils in upstream areas had already oxidized and leached sulfuric acid. The degradation rate of sampled acid sulfate soils for dieldrin was found to increase with iron sulfide content, and was not affected by organic carbon clearly. The decomposition of dieldrin are controlled by the chemical reactivity of iron sulfides in natural systems, independent of microbial activity.

キーワード：自然減衰、残留性有機化合物、酸性硫酸塩土壌、酸化分解

Keywords: Natural Attenuation, Persistent organic chemicals, acid sulfate soil, oxidative degradation

## Characterization of Dioxins in Sewage Sludge

\*張 銘<sup>1</sup>、吉川 美穂<sup>1</sup>、淳子 原<sup>1</sup>、杉田 創<sup>1</sup>、川辺 能成<sup>1</sup>

\*Ming Zhang<sup>1</sup>, Miho Yoshikawa<sup>1</sup>, Junko Hara<sup>1</sup>, Hajime Sugita<sup>1</sup>, Yoshishige Kawabe<sup>1</sup>

1. 産業技術総合研究所地質調査総合センター地圏資源環境研究部門

1. Institute for Geo-Resources and Environment, Geological Survey of Japan, AIST

Dioxins are a group of chemically-related compounds that are highly toxic. They are mainly byproducts of industrial practices and can be produced through a variety of incineration processes such as improper municipal waste incineration and burning of trash. Although technologies are available that allow for controlled waste incineration with low dioxin emissions in recent years, environmental contamination by dioxins remains one of big issues today because they are chemically stable and resistant to degradation in the natural environment. Dioxins are found throughout the world in the environment and they accumulate in the food chain, mainly in the fatty tissue of animals, and may result in high concentrations in sewage sludge.

Characterization of dioxins in sewage sludge is not easy because they have a variety of congeners and have strong adsorption to organic matters. Referring to CEN/TS 16190: 2011, and using the sample provided by Federal Institute for Materials Research and Testing, BAM, this study examined the analytical accuracy of dioxins in sewage sludge by using gas chromatography with high resolution mass selective detection (HR GC-MS). In addition, a comparison between the results obtained by using different columns, specifically, BPX-DXN(SGE) and RH-12ms (Inventx) was made to investigate potential effects from the column being used.

The results demonstrated that both BPX-DXN(SGE) and RH-12ms (Inventx) can be used to analyze dioxins with an acceptable accuracy, i.e., the effects of column are negligible. Comparisons with the results obtained from other laboratories demonstrated that the skillfulness of operators and detailed conditions for extraction could be the major reasons that induce significant analytical errors. Test results were certified by BAM and, therefore, the procedures and approaches used in this study may provide a standard reference for characterizing dioxins contained in sewage sludge.

キーワード : Soil Contamination、Dioxins、Sewage Sludge、Analysis Accuracy、Standardization  
Keywords: Soil Contamination, Dioxins, Sewage Sludge, Analysis Accuracy, Standardization

# Experimental Setup and Application of High-Precision Fiber Bragg Grating Sensors for Laboratory Core Flooding Monitoring

\*QI LI<sup>1</sup>, Yankun Sun<sup>1,2</sup>, Chengkai Fan<sup>1,2</sup>, Xiaying Li<sup>1,2</sup>, Liang Xu<sup>1,2</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics (IRSM), Chinese Academy of Sciences, Wuhan 430071, China, 2. University of Chinese Academy of Sciences, Beijing 100049, China

The fiber optical sensing (FOS) data from CO<sub>2</sub>/brine flooding experiments are of great significance for geophysicists and reservoir engineers to better understand their experimental phenomenon, numerical simulation and field applications in the Carbon Capture, Utilization and Storage (CCUS) projects. The state-of-the-art high-resolution laboratory core flooding apparatus has been designed for CO<sub>2</sub> geological storage and acid gas injection in the Institute of Rock and Soil Mechanics, the Chinese Academy of Sciences, Wuhan, China. This apparatus couples three monitoring techniques of acoustic emission probes, strain gauge and fiber optical sensors into typical sedimentary rocks in core-scale CO<sub>2</sub>/brine flooding experiments under simulated in-situ P-T conditions. The main objective of this apparatus is to continuously seize the front of CO<sub>2</sub> plume migration during the coupled process of scCO<sub>2</sub> displacing brine in brine-saturated sedimentary core samples.

In this presentation, firstly we figured out the experimental setup of high-resolution fiber Bragg grating (FBG) Sensors in the laboratory core flooding experimental apparatus. Then, we conducted a series of deionization water and free-CO<sub>2</sub> core flooding experiments on saturated sandstone core specimens under various reservoir conditions. We dynamically monitored the strain responses during the water and CO<sub>2</sub> displacement processes by using three FBG sensor arrays along the axial and radial directions. Finally, we found that the relative strain increased throughout the experiment with the increase in the confining pressure or pore pressure. For the water flooding experiment, the proportions due to the rise of the sequestration pressures were different in each scenario and FBG arrays, and they showed generally positive increases, which can be ascribed to the effective pressure. Meanwhile, the initial arrival time of the precisely characterized strain histories revealed the fronts of the injected water as well as the detailed implications of the CO<sub>2</sub> plume migration during the core-scale flooding processes.

## References

- Lv GZ, Li Q, Wang S, Li X (2015) Key techniques of reservoir engineering and injection-production process for CO<sub>2</sub> flooding in China's SINOPEC Shengli Oilfield. *Journal of CO<sub>2</sub> Utilization*. 11:31-40. doi:10.1016/j.jcou.2014.12.007
- Sun Y, Li Q, Yang D, Liu X (2016) Laboratory core flooding experimental systems for CO<sub>2</sub> geosequestration: An updated review over the past decade. *Journal of Rock Mechanics and Geotechnical Engineering*. 8:113-126. doi:10.1016/j.jrmge.2015.12.001
- Sun Y, Li Q, Fan C (2017) Laboratory core flooding experiments in reservoir sandstone under different sequestration pressures using multichannel fiber Bragg grating sensor arrays. *International Journal of Greenhouse Gas Control*. Under revision.

Keywords: Carbon Capture, Utilization and Storage (CCUS), Core flooding experiment, Fiber optical sensing

## Occurrence, Transport Risk and Assessment of *Cryptosporidium*

\*Ping Lu<sup>1</sup>, tao yuan<sup>2,3</sup>, yadong kong<sup>1</sup>, jinhui niu<sup>1</sup>, qiyan feng<sup>1</sup>

1. Department of environmental science and spatial informatics, china university of mining and technology, 2. Department of Architecture Equipment and Civil Engineering, Jiangsu Vocational Institute of Architectural Technology, 3. JiangSu Collaborative Innovation Centre for Building Energy Saving and Construct Technology

*Cryptosporidium* can infect people when swimming or diving in the recreational water bodies. Here, our work shows findings regarding the transport of *Cryptosporidium* sized-microspheres from soil to the water bodies, which was a potential source of *Cryptosporidium* of water bodies, as well a one-year investigation of the occurrence and distribution of protozoan parasites *Cryptosporidium* in Yunlong Lake, Xuzhou, China. The objective of this work was to investigate the soil chemical characteristic impact on transport of *Cryptosporidium* from the bank soil to surface water bodies, and to evaluate the full-body contact risk of infection of *Cryptosporidium* in the lake. Results show (1) The number of *Cryptosporidium*-sized microspheres transport declined from 25 #/mL to 2 #/mL while the Total Organic Carbon (TOC) in soil increased from 0mg/L to 40mg/L. The number of microspheres washed out reduced sharply with the increased of the content of sodium ion in soil, while the content of sodium ion in soil increased from 0.007mol/L to 0.200mol/L the substitutes washed out reduced from 115 #/mL to 33 #/mL. The transport of microspheres remains stable for the weakly alkaline soil and reduced sharply for the weakly acidic soil, when soil pH rose from 5 to 7, microspheres washed out stabilized at 24 #/mL, but when soil pH rose to 8, microspheres washed out sharply reduced to 10 #/mL. (2) The number of *Cryptosporidium* oocysts were 0-8/10L in water samples and 0-260/g in sediment samples. According to risk assessment, in July, it is the highest risk for swimming or diving (probability of each time infection was  $3.66 \times 10^{-3}$ ). Therefore, soil chemical characteristics have an important impact on *Cryptosporidium* transport with runoff. Monitor of *Cryptosporidium* in water bodies is highly recommended after a rain.

Keywords: risk assessment, transport, runoff, *Cryptosporidium*

# Reductive Dechlorination of Carbon Tetrachloride by Microscale Sponge Iron

\*Xueqiang ZHU<sup>1</sup>, Baoping Han<sup>2</sup>, Qiyan Feng<sup>1</sup>

1. China University of Mining and Technology, 2. Jiangsu Normal University

Chlorinated hydrocarbons are the most prevalent groundwater pollutants that pose a risk to public health. The degradation of  $\text{CCl}_4$  by sponge iron and factors affecting degradation efficiency including acid washing, dosage and initial pH were investigated through batch experiments in this study. Results showed that  $\text{CCl}_4$  was effectively degraded by sponge iron and about 75 percent of  $\text{CCl}_4$  was transformed into chloroform (CF) by hydrogenolysis process. The rate of CF transformation was slower than that of  $\text{CCl}_4$ , resulting in the CF accumulation. Surface acid activation showed slight influence on  $\text{CCl}_4$  degradation with ZVI. The  $\text{CCl}_4$  degradation reactions followed pseudo-first-order kinetics, and the apparent first-order rate constant ( $k_{\text{obs}}$ ) increased linearly with increasing ZVI dosage and the suitable dosage of 20g/L was indicated in terms of surface area-normalized rate constants ( $k_{\text{SA}}$ ). The  $k_{\text{obs}}$  decreased with the increasing of pH value and the process indicated that the degradation of  $\text{CCl}_4$  had a better performance under weak acidic condition.

Keywords: Carbon tetrachloride, Sponge iron, Reductive dechlorination



## Study on the conductivity of calcareous sand

\*HU MINGJIAN<sup>1</sup>、Jiang Hanghai<sup>1</sup>、Zhu Changqi<sup>1</sup>、Wang Xinzhi<sup>1</sup>、Wang Ren<sup>1</sup>

\*MINGJIAN HU<sup>1</sup>, Hanghai Jiang<sup>1</sup>, Changqi Zhu<sup>1</sup>, Xinzhi Wang<sup>1</sup>, Ren Wang<sup>1</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences

There is an important relationship between the moisture content and conductivity of the salt-containing calcareous sand in the process of groundwater desalination on lime-sand island. The trend of groundwater desalination can be expressed by the conductivity of the salt-containing calcareous sand. But the conductivity of pore water is difficult to measure directly, however, it can be measured indirectly through conductivity and saturation testing of the calcareous sand. An open and bared ground on a lime-sand island is selected to start the conductivity and saturation tests, sensors of temperature, conductivity and water pressure are buried underground at height 0.5, 1.0 and 1.5m to monitor the electrical conductivity and volumetric water content of the calcareous sand. In addition, the chloride ion content and the conductivity of the calcareous sand with different gradation and water contents are measured by laboratory tests. Results shows that the conductivity of pore water is basically linear with the conductivity of calcareous sand, also a linear relationship as between the volumetric water content and conductivity of calcareous sand. The groundwater conductivity in the lime-sand island linear-fitting with the chloride ion content is also illustrated by the local monitoring and laboratory tests, thus the changes of the chloride ion concentration can be reflected by the conductivity of the pore water, then the salinity of calcareous sand and the desalination of groundwater in lime-sand island can be easily evaluated.

キーワード : calcareous sand、 conductivity、 volumetric water content、 linear relationship、 chloride ion concentration

Keywords: calcareous sand, conductivity, volumetric water content, linear relationship, chloride ion concentration

## Prompt Estimation of Uniaxial Compressive Strength Based on Resistivity and Conductive Alertness of Frozen soil

\*HU MINGJIAN<sup>1,2</sup>、Zhu Changqi<sup>1,2</sup>、Fu Wei<sup>3</sup>、Wang Ren<sup>1,2</sup>

\*MINGJIAN HU<sup>1,2</sup>、Changqi Zhu<sup>1,2</sup>、Wei Fu<sup>3</sup>、Ren Wang<sup>1,2</sup>

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences、 2. Institute of Rock and Soil Mechanics, Chinese Academy of Sciences、 3. China Communications the Second Highway Consultants Co. Ltd.

1. State Key Laboratory of Geomechanics and Geotechnical Engineering, Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 2. Institute of Rock and Soil Mechanics, Chinese Academy of Sciences, 3. China Communications the Second Highway Consultants Co. Ltd.

Resistivity and conductive alertness is an inherent attribute of frozen soil, and a new method to estimate the frozen soil uniaxial compressive strength quickly is developed based on the resistivity and conductive alertness. The mechanical behavior of the Qinghai-Tibet Railway subgrade filling under load is investigated, indoor frozen soil uniaxial compression tests are conducted with the silt clay of Qinghai-Tibet Railway subgrade filling at different temperatures, resistivity is monitored during the whole test process. In this way, the stress-strain-resistivity curve is obtained, and the influence of temperature on the resistivity and conductive alertness is discussed. Results show that the frozen soil shows the similar properties as a varistor under compressive condition; with the increasing of the compressive stress, the resistivity can be divided into three variation intervals: a reduction zone, a balance zone, and a sharp increasing zone. When the dry density and water content is  $1.71\text{g/cm}^3$  and 17.8% respectively, the original resistivity, maximum resistivity, and the largest tangent modulus of the frozen soil increase simultaneously with the temperature decreasing. The relationship between uniaxial compressive strength( $q_u$ ) and original resistivity of the frozen soil satisfies with the equation, a new method of frozen soil strength quickly estimation is proposed and owned wide prospects of engineering application in the future.

キーワード : Frozen soil、 uniaxial compressive strength、 temperature、 resistivity、 tangent modulus  
Keywords: Frozen soil, uniaxial compressive strength, temperature, resistivity, tangent modulus

## Remediating fluoride and boron contaminants from water using envelope of carbon particles and nano fibrous filters.

\*Abinash Mohanty<sup>1,2</sup>

1. Nalanda University, India, 2. Technical University of Liberec

**Background:** Extreme fluoride concentrations have been reported in ground waters of more than 20 developed and developing countries including India, South America and Europe, out of which alone in India, 19 states are facing acute fluorosis problems. Various technologies are being used to remove fluoride from water but still, the problem has not been rooted out. Problems of similar sort are stated for Boron too, though not in the same geographical coordinates. The boron contamination is quite an issue for European context. Hence the issue can be applied for remediation irrespective of geographical coordinates. The main problem with an assessment of fluoride contaminants is that they are not needed to be decontaminated fully if done so then it has some adverse health issues are apprehended. So measuring the concentration of fluoride and boron contaminants in water a filtration system is showcased discovered, which is economically viable and can be implemented in both large scale and small scale modules. The main objective of this paper is to showcase the decontamination of fluoride and boron from the water using carbon particles and nanofibrous filter.

**Results:** In this work, different concentration of carbon nanoparticles were used for decontamination of fluoride and boron contaminants using column separation method and hence its kinetics and stability were measured and fit to be an efficient system of filtration. Since the experimental set up was navigated at different contact times the efficiency of the whole filtration system was found to be 93 % in case of boron contamination and 87% in case of fluoride contamination. Finally, different envelope pouch of filters was tested at different concentration levels to cross check the efficiency of the filtration system.

**Conclusion:** This major system of filtration is quite cost effective and easy to fit use mechanism using Nanofibrous filters and carbon particles. This filtration system has important applications in terms of groundwater remediation, wastewater treatment even at industrial scale.

**Keyword:** Nano-Fibrous filters, Fluoride & boron decontamination, Carbon particles, Sorption, Column Filtration,

Keywords: Nano-Fibrous filters, Fluoride & boron decontamination, Carbon particles, Sorption, Column Filtration-water, Water- Sustainability nexus

