

## Observed stable isotopes in precipitation and estimated water vapor origins across Japan throughout 2013

\*Kimpei Ichiyanagi<sup>1</sup>, Masahiro Tanoue<sup>2</sup>, Kei Yoshimura<sup>2</sup>, Tsuyoshi Kumamomidou

1. Kumamoto University, 2. The University of Tokyo

Stable isotopes in precipitation are useful tracers for understanding atmospheric water cycles, estimating water vapor origins. There are a lot of observational studies of stable isotopes in precipitation all over Japan, however, most observations were conducted only one point and only one year. This study investigated spatial and temporal variabilities of stable isotopes in precipitation across Japan and estimates their water vapor origins. Stable isotopes in precipitation were observed at 77 stations throughout 2013. The water vapor origins, that is where the water vapor evaporated from, were estimated by using the isotope-incorporated atmospheric general circulation model.

The Cluster analysis was used to distinguish the spatial grouping of seasonal variability of monthly mean Oxygen-18 anomaly from the annual mean values. Stations belong to the cluster 1, 2, and 3 were distributed mainly in the Pacific Ocean side of the Kanto and Chubu, the Chube mountainous area and North Japan, and the Sea of Japan side and West Japan, respectively. Cluster 1 was characterized extremely low anomaly in January. This was caused by the snowfall event when the Nagan-Low pressure system passed on 14-15 January. Cluster 2 showed clear seasonal variability, high in summer and low in winter. From the estimation of water vapor origins, the Pacific Ocean origin and the Sea of Japan origin were dominated in summer and in winter, respectively. Cluster 3 characterized that Oxygen-18 anomaly in June was much lower than those in May and July. The depletion in June became larger toward south, which had a negative correlation with the precipitation amount. Also, water vapor evaporated from the Indian Ocean which had low isotope values were higher toward south in June. The precipitation amount effect and rainout process of water vapor passage from the Indian Ocean to Japan might be controlling factors to stable isotopes in precipitation in June.

Keywords: stable isotopes, precipitation, water vapor origins

# Inter-annual Mass Variability of Antarctic Ice Sheet and Gulf of Alaska Glaciers and their Relevance to Pacific Decadal Oscillation

\*Byeonghoon Kim<sup>1</sup>, Ki-Weon Seo<sup>1</sup>

1. Seoul National University

Recent studies from GRACE (Gravity Recovery and Climate Experiment) suggest that the ice mass variations of Antarctic Ice Sheet (AIS) and Gulf of Alaska (GOA) glaciers have inter-annual variability. In this study, we first investigate how those changes could be explained by two meteorological parameters: precipitation and temperature. For AIS, the change of cumulative precipitation from ERA-interim reanalysis is very close to the ice mass variation derived from GRACE, as previous researches already showed. For GOA glaciers region, the ice mass variation is simulated by a simple model using snow precipitation and surface temperature obtained from ERA-Interim. As this model reveals, the ice mass variation is greatly dependent on temperature. We further examine the influence of Pacific Decadal Oscillation (PDO) on Antarctic precipitation and the temperature change in GOA. As a result, a decadal or an inter-annual variability of ice mass change in both regions is directly or indirectly related to PDO. If the relations here stated prove to be true, they will probably serve to predict the ice mass variations of the two regions for the near future.

Keywords: Antarctica, Gulf of Alaska Glaciers, Ice Mass Change, Pacific Decadal Oscillation

## Interannual Variability of Soil Moisture in European Russia and its Links to Regional Climate During Boreal Summer

\*Igor I Zveryaev<sup>1</sup>, Alexey V Arkhipkin<sup>1</sup>

1. Shirshov Institute of Oceanology, Moscow, Russia

Soil moisture data from the GLEAM (Global Land Evaporation Amsterdam Model) dataset for 1980-2014 are used to investigate the leading modes of interannual variability of soil moisture in European Russia during summer season. An EOF (Empirical Orthogonal Functions) analysis performed on the monthly means (i.e., separately for June, July and August time series) revealed three leading modes of soil moisture variability, characterized by the monopole (EOF-1), zonal dipole (EOF-2) and meridional dipole (EOF-3) patterns. These modes explain respectively 29-35%, 11-18% and 10-13% of the total variability of soil moisture. Analysis of correlations between the leading PCs (principal components) of soil moisture and indices of regional teleconnections suggests that there are not very strong, but statistically significant links between regional soil moisture variability and the Scandinavian teleconnection, the East Atlantic –Western Russia teleconnection and the Atlantic Multidecadal Oscillation. The leading PCs capture pretty well the large soil moisture anomalies associated with regional climate extremes (such as extremely dry conditions associated with the Russian summer heat wave in 2010). An analysis of links to regional climate revealed generally consistent patterns in which positive (negative) soil moisture anomalies are linked to cyclonic (anti-cyclonic) anomalies of sea level pressure, above (below) normal precipitation and negative (positive) anomalies of air temperature.

Keywords: soil moisture, European Russia, summer season, interannual variability

## Seasonality in stream hydrograph of a montane watershed in northern Thailand: Is there a threshold condition that predicts mid-wet-season shift in rainfall-runoff relationship?

\*Han Tseng<sup>1</sup>, Thomas W. Giambelluca<sup>1</sup>, Yin-Phan Tsang<sup>2</sup>, Alan D. Ziegler<sup>3</sup>


1. Univ. of Hawai'i at Manoa, Dept of Geography, Honolulu, HI, United States, 2. Univ. of Hawai'i at Manoa, Dept of Natural Resources & Environmental Management, Honolulu, HI, United States, 3. National Univ. of Singapore, Dept of Geography, Singapore, Singapore

In this study, we examined the dynamics of the rainfall-runoff relationship in Mae Sa watershed, a montane catchment with mixed forest, agriculture, and peri-urban land covers in northern Thailand near the city of Chiang Mai. The Asian monsoon and tropical storms produce highly distinct wet-dry rainfall seasonality in this region. Wet season rainfall exhibits a bimodal distribution with peaks in early May and August-September, separated by a relatively dry period (June-July). Wet season streamflow of Mae Sa roughly follows the bimodal rainfall pattern, but the discharge tends to be much higher in the second than in the first rainfall peak, and in many cases, a storm of similar magnitude generates a much larger discharge event after approximately the midpoint of the wet season.

We analyzed daily hydrographs and used runoff coefficients (RCs) as an indicator of the watershed hydrological response to rainfall to examine the seasonal trend and interannual variations and explored the use of simple indices of catchment antecedent conditions to explain such rainfall-runoff dynamics. We obtained the daily time series of discharge measured at the catchment outlet and rainfall observations from the 11-gauge network in the 74.2-km<sup>2</sup> watershed from mid-2004 to 2012. Hourly rainfall records from each of the 11 rain gauges were first adjusted for lag time with respect to the stream discharge, based on the time difference between the peak discharge and the peak rainfall of isolated events at the specific station. The aligned 11 rain gauge hourly records were then spatially interpolated using Thiessen polygon method and integrated into a daily watershed rainfall time series. We separated the quickflow and baseflow components and identified individual quickflow events from the resulting daily rainfall and discharge time series. RCs were then calculated based on both the quickflow component (quickflow-RC = quickflow/rainfall) and the total discharge (total discharge-RC = discharge/rainfall) at the event scale as well as on a daily time step.

Analyses of the hydrograph and RC time series revealed a seasonal pattern where abrupt upward shifts or steep increases in the RCs were observed. The result suggests a “switch-point” in the rainfall-runoff relationship annual cycle, after which similar rainfall events generate higher discharge than earlier. While this switch-point generally occurs in the second half of the wet season, the occurrence and timing varied from year to year during the 8.5 years studied. This inter-annual variability in the occurrence and timing of the switch-point appears to be related to the difference in annual rainfall amounts and the temporal patterns. For example, the shift in RC in 2007 and 2010, which have average or lower annual RF, are more obvious compared to 2006 and 2011, which have higher total RF and higher RC in the early stage of the wet season. Indices of the watershed antecedent conditions (e.g. cumulative rainfall, baseflow level at time of event) and event characteristics (e.g. rainfall intensity, event duration) were compared with RCs to further explore potential “threshold” conditions that might trigger the change in the watershed hydrological response.

Keywords: rainfall-runoff response, runoff coefficient, tropical monsoon climate, montane forest watershed, watershed hydrology

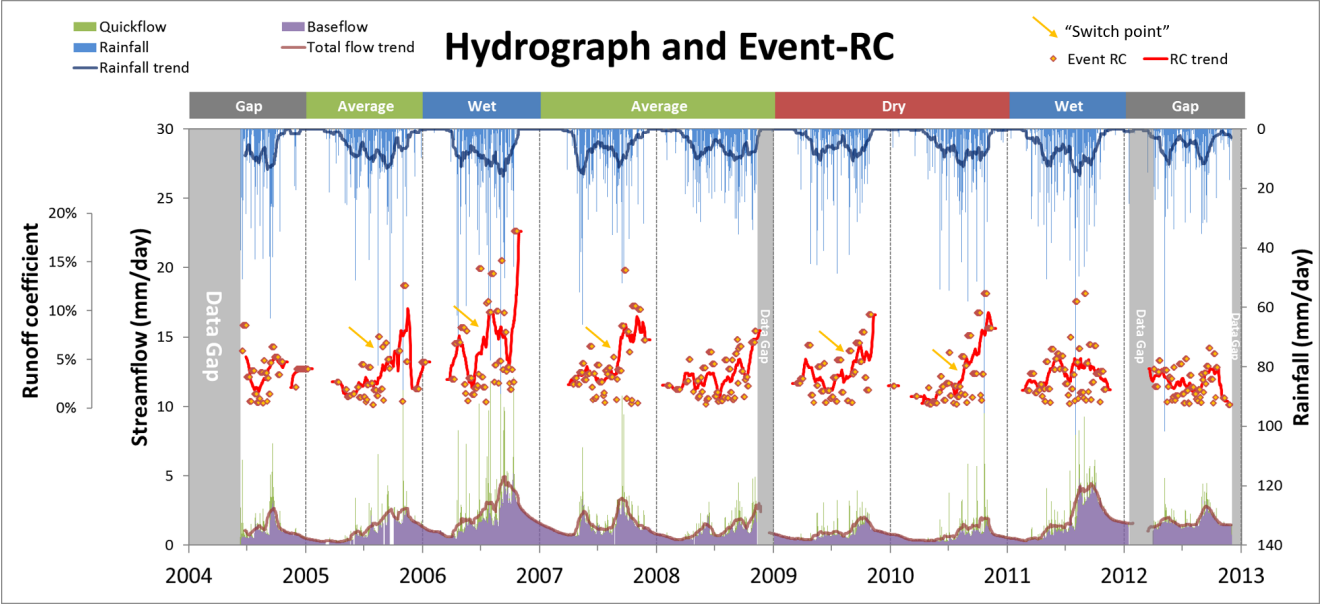

# Prediction interval optimization of radial basis function artificial neural network streamflow forecast models


\*Kasiviswanathan Kasiapillai Sudalaimuthu<sup>1</sup>, Sudheer KP<sup>2</sup>, Adebayo J Adeloye<sup>1</sup>

1. Institute for Infrastructure and Environment, Heriot-Watt University, Edinburgh EH14 4AS, UK , 2. Department of Civil Engineering, Indian Institute of Technology Madras, Chennai 600036, India

Understanding the complex nature of rainfall-runoff process has opened many folds of modeling technique. It is still a challenging task in hydrologic modeling analyzing the inherent variability or uncertainty besides the improvement in model performance. To date, variety of hydrologic models have been developed which are mainly classified into physics based or data driven based approaches. The advantage of using physics based models represents the physical processes responsible for generating the flow. However, it often requires more information of catchment, and expertise of modeler. In addition, any changes in the catchment may alter the performance of the model because of the sensitivity of model parameters. Alternatively, the data driven models have produced reasonable estimate of streamflow forecasting compared to physics based models. The main advantage lies learning the underlined processes from historically measured data without explicit information of the system to be modeled. Though the data driven models might not include the physical processes in its computation, the accurate estimation of flood is mainly required, which encourages the application of these models. Over the last two decades, various types of data driven based flood forecast/rainfall-runoff models have been reported, in which Radial Basis Function Artificial Neural Network (RBFANN) model has been recognized as a promising tool while approximating the non-linear hydrologic processes. However, the point estimation of RBFANN sometimes lacks in explaining the underline variability or uncertainty associated with modeling, which reduces the reliability of the models. Hence the main focus of the present paper is to carry out the uncertainty analysis of RBFANN. The RBFANN has a parameter called spread, which needs to be determined carefully, since it identifies appropriate model parameters of ANN (i.e. weights and biases). In general, the RBFANN uses a default constant spread value (named as Static RBFANN in this study) which leads to a point prediction of model output. However any improper selection of spread value might lead to over and/or poor generalization of ANN models. In this paper, a multi-objective optimization method is proposed for estimating the upper and lower values of spread (named as Stochastic RBFANN), which in turn train two sets of weights and biases for forecasting the upper and lower bounds of model output in the form of prediction interval (PI). The proposed modeling approach is demonstrated through streamflow forecasting using the hourly rainfall and runoff data collected from Kolar river basin, India. The comparison between Static and Stochastic RBFANN models indicates that the performance of these models is similar. However, the Stochastic RBFANN modeling approach produces prediction interval that indicate the level of uncertainty. The multi-objective optimization function comprised of two indices such as percentage of coverage (POC) and average width (AW), which are generally used to evaluate the model prediction uncertainty was formulated. The prediction interval (Fig.1) for various flow domains resulted in different magnitude of prediction uncertainty. The high flow series contained only 7 percentage of observation in the prediction interval compared to low (77%) and medium flow (79%) in the model validation. As uncertainty can be directly related to the reliability, the information from the prediction interval is necessary for the careful identification of model output, in specific to the decision making on the flood forecast. Overall, the quantification of prediction uncertainty in RBFANN provides valuable information, which clearly illustrates the strong and weak points while forecasting the streamflow.

**Fig. 1** Prediction interval corresponding to upper and lower bound values of spread

Keywords: Artificial neural network, Prediction interval, Radial basis function, Streamflow forecast, Uncertainty

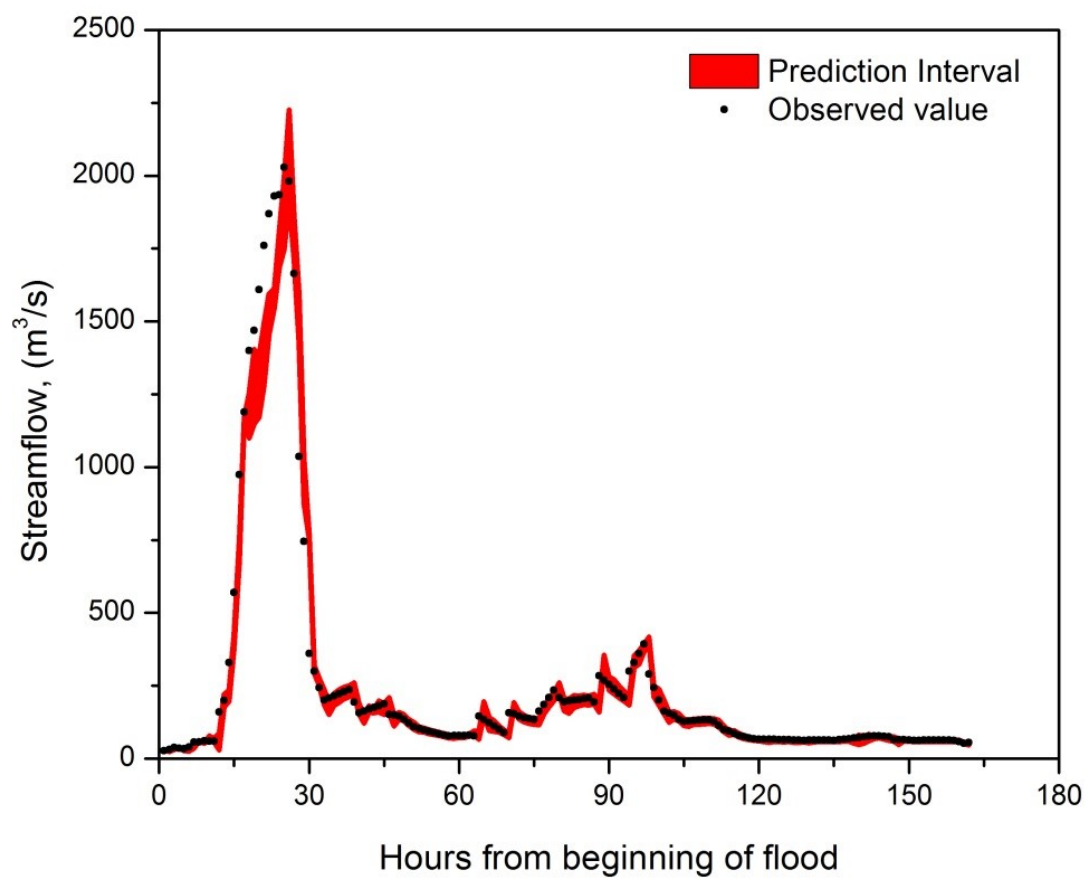

## Seasonal variation of major ions and trace element distribution in streams draining the mineralized Lom Basin, East Cameroon

\*Mumbfu Ernestine Mimba<sup>1,2</sup>, Takeshi Ohba<sup>1</sup>, Salomon César Nguemhe Fils<sup>2</sup>, Mengnjo Jude Wirmvem<sup>1</sup>, Festus Tongwa Aka<sup>2</sup>

1. Department of Chemistry, School of Science, Tokai University, 2. Institute of Geological and Mining Research

Surface water and boreholes comprise the major source of water supply for domestic and small scale mining operations in the Lom Basin. Streamwater chemistry of the mineralized basin was investigated for the first time in order to show the seasonal variation in major ion distribution patterns and identify the origin and geochemical behaviour of some trace elements. A total of 81 water samples collected from lower order streams during the dry and wet seasons, were analysed for major ion and trace element contents. Results revealed that all the measured physico-chemical parameters varied narrowly between the dry and wet seasons. Concentrations of  $\text{Cl}^-$  showed no fluctuations throughout the sampling seasons due to its conservative nature and limited potential sources. Nitrate levels decreased in the wet period owing to dilution by surface runoff. Dissolved  $\text{SO}_4^{2-}$  concentrations were low for both seasons indicating the dissolution of low sulphide minerals associated with gold deposits. The concentration of the major ions  $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ ,  $\text{Na}^+$ ,  $\text{K}^+$  and  $\text{HCO}_3^-$  slightly increased during the wet season as they are flushed from soils during precipitation. As a whole, the seasonal regime of stream water chemistry is controlled by the following processes: a) contribution of major cations and  $\text{HCO}_3^-$  from chemical weathering supplied by ground water flow during the dry season. b) leaching of salts from surface soil layers during rain events and c) dilution by surface runoff during the wet season. Streamwater is characterised by low acidity and trace metal loadings reflecting low sulphide solubility and the likely buffering capacity of silicate minerals. In this strongly lateritic environment, the weathering of vein gold mineralisation results in sulphide oxidation and the entrapment of a significant portion of released trace metals in ferruginous oxide phases. Despite the past and active small-scale mining operations, the streams have not been impacted. Bearing in mind that legal standards for water chemistry evaluation are yet to be fixed in Cameroon, our findings may assist policy makers to set guidelines, especially in mineralised areas.

Keywords: seasonal variation, major ions, trace metals, Lom Basin, Cameroon



## Geochemical evolution of deep groundwater in Cretaceous aquifer of the Southern Gobi, Mongolia

\*Batdemberel BAYANZUL<sup>1</sup>, Kengo NAKAMURA<sup>1</sup>, Isao MACHIDA<sup>2</sup>, Takeshi KOMAI<sup>1</sup>

1. Graduate school of Environmental Studies, Tohoku University, 2. Groundwater research group, Advanced Industrial Science and Technology

In the Southern Gobi Region, water use by the mining industry, which is one of the important industries in Mongolia, depends on groundwater. The area is characterized by a dry climate. Although the average air temperature is around 7.5°C, the lowest temperature in the winter reaches -34°C, and the highest temperature in the summer reaches up to +43°C at Khanbogd soum. The total annual precipitation is approximately 85 mm, of which 90% falls as rain during the summer seasons and the remaining 10% as snow.

The Gunii khooloi aquifer is the most important water resource for Oyu Tolgoi Mine. The aquifer consists of Cretaceous sediments which comprise up to 150 m thick unconsolidated brown sands and gravels with minor interbedded units of clay and conglomerate. Recently, there has been growing concerns about droughts which might affect the groundwater recharge. However, despite this, extensive groundwater study in the Gobi region has yet to be carried out.

Our field survey took place in September 2016. Shallow and deep groundwater, springs and rain water were collected at a total of 70 points. Groundwater samples were taken from production and monitoring boreholes using existing pumping, portable mini pump or hand bailer. Temperature, pH, EC and alkalinity were measured at the field. Analysis of the water samples for major ions, hydrogen and oxygen stable isotopes, as well as tritium (8 samples) is underway at the laboratory in Tohoku University or AIST. Here, we will present the chemical and isotopic properties of water samples, and will introduce our future plan.

Keywords: Gunii khooloi aquifer, Groundwater recharge, Groundwater origin

## Metal pollution assessment of subsurface profile in saline water affected area of Bengal Delta

\*SUSHMITA HOSSAIN<sup>1,2</sup>, Asma Akter<sup>4</sup>, Shirin Akter<sup>2</sup>, Yeasmin Nahar Jolly<sup>2</sup>, Bilkis Ara Begum<sup>2</sup>, Takashi Ishiyama<sup>3</sup>, Shoichi Hachinohe<sup>3</sup>, Aziz Hasan<sup>4</sup>, Kazi Matin Ahmed<sup>4</sup>

1. Graduate school of Science and Engineering, Saitama University, Japan, 2. Chemistry Division, Atomic Energy Centre, Bangladesh Atomic Energy Commission, Bangladesh, 3. Research Institute, Center for Environmental Science in Saitama, Japan, 4. Department of Geology, University of Dhaka, Bangladesh

Groundwater of southern part of Bengal Delta is severely affected by saline water along with heavy metals and trace elements e.g., Arsenic (As), Iron (Fe), Manganese (Mn), Copper (Cu) and Zinc (Zn) etc. Groundwater management in this area needs detail risk assessment of metal pollution and potential mobility of metal from sediment to groundwater. Sediment plays major role to transfer metals to groundwater under different environmental conditions. Determination of total heavy metal content in surface soil, sediment of aquitard and aquifer is necessary to understand overall risk of mobility and to take initiative for groundwater management. Recently Managed Aquifer Recharge (MAR) has been introduced to improve the groundwater quality of near coastal area of Bengal Delta. In this study, total 18 soil, channel fill deposit aquifer and overbank deposit aquitard sediment samples of two MAR boring locations had been collected up to depth of 100 ft at 10 to 20 ft interval. Total content of As, Cu, Zn, Fe and Mn were determined using XRF (X-Ray Fluorescence) spectrometer. In aquifer sediment, total As, Cu, Zn, Mn and Fe content ranges from total As, Cu, Zn, Mn and Fe content ranges from 10.5-15.8 mg/kg, 29.7-38.7 mg/kg, 36.3-44.8 mg/kg, 257.6-487.8 mg/kg and 2.1-2.7 % respectively. Metal content in aquitard is variable at different depth. Metal pollution assessment has been carried out using some pollution indices like Geo accumulation index (Igeo), Contamination Factor (Cf), Pollution Load Index (PLI), Elemental Contamination Index (ECI) etc. Based on comparing the natural abundances and results of different indices, it is found that both location is moderate to highly contaminated with As, Mn and Fe whereas not contaminated with Cu and Zn. However, metal like As has strong affinity with iron manganese oxyhydroxide, therefore further speciation analysis will give precise information for potential mobility of metals.

Keywords: Heavy metal, Pollution Index

## Groundwater modeling studies to understand hydrogeological conditions and to develop a groundwater management strategy in parts of Dewas District, Central India

\*Devdutt Vijay Upasani<sup>1</sup>, Himanshu Kulkarni<sup>2</sup>

1. Department of Geology, Fergusson College, Pune-411004, India, 2. Advanced Center for Water Resources Development and Management (ACWADAM), Pune-411021, India

The high dependency of India on its agrarian economy has caused overexploitation of aquifers in many parts of the country. The need of the hour is to develop a sustainable groundwater management strategy, which is not only based on social makeup of an area but also considers the hydrogeological variables in the region.

Groundwater models are computer models of groundwater flow systems and are used to simulate and predict aquifer conditions. Groundwater modeling was undertaken in a part of the *Central Drylands* of India as a part of this study. BGSPT-PTSIM program package by Barker (1989) was used specifically to simulate time-drawdown behaviour for a specified set of parameters.

The radius of influence as an effect of the pumping was modelled for different shallow aquifers in the area of approximately 600 km<sup>2</sup>, based on their Transmissivity and Storativity values. Numerous simulation runs were conducted with various data sets. The modelling considered estimates of aquifer properties like Transmissivity and Storativity and also the rates of pumping (Q) that were recorded during pumping tests as well as on the basis of observations made during the inventory of wells from time to time during the research work.

The behaviour of the water levels in the area was understood and further from these simulations, the safe distance between wells was calculated. Safe distance between wells implies the spacing between wells which will not lead to an accelerated dewatering of the aquifers, in general. The last set of simulations was created using the actual well distances in the different areas and the cone of influence of the wells, pumping for a complete pumping season i.e. about 100 days. These simulations indicate that, in the current situation, there are areas where the aquifers are free from major well-interference, due to fewer numbers of wells and because of the aquifer characteristics. However, there are a few aquifers where the higher number of wells actually causes the cones of depression of the pumping wells to interfere with each other causing a quicker dewatering of the aquifers, leading to over-abstraction and unsustainable pumping conditions.

This study is one of the first studies in the country where hydrogeological analyses and groundwater modeling data was used to develop a groundwater management strategy in the region.

Keywords: Groundwater modeling, BGSPT-PTSIM, radius of influence, dewatering of aquifers, groundwater management strategy

## Learning about future applications of tritium-tracer in Japanese river waters from the Hokkaido headwater catchments

\*Maksym Gusyev<sup>1</sup>, Uwe Morgenstern<sup>2</sup>, Michael K. Stewart<sup>3</sup>, Yoshio Tokunaga<sup>1</sup>

1. International Centre for Water Hazard Risk Management, Public Works Research Institute, Tsukuba, Japan, 2. GNS Science, Lower Hutt, New Zealand, 3. Aquifer Dynamics & GNS Science, PO Box 30368, Lower Hutt, New Zealand

Tritium-tracer in river water can provide useful information about surface water –groundwater dynamics in Japan as demonstrated at 12 headwater catchments of Hokkaido Island with altitudes between 22 and 831 m above sea level and catchment areas between 14 and 377 km<sup>2</sup>. For these catchments, we collected 16 water samples at baseflows in June, July, and October 2014 and one river water sample on February 2016 near the south of Sapporo. These water samples were analysed for tritium as well as stable isotopes at the GNS Science low-level tritium laboratory in New Zealand. Measured tritium concentrations were between 4.07 ( $\pm 0.07$ ) TU and 5.29 ( $\pm 0.09$ ) TU in June, 5.06 ( $\pm 0.09$ ) TU in July, and between 3.75 ( $\pm 0.07$ ) TU and 4.85 ( $\pm 0.07$ ) TU in October. In the south of Sapporo, the neighboring river catchments clustered in similar hydrogeological settings of Quaternary lava as well as Tertiary propylite formations had similar tritium values suggesting that they drain the same groundwater watershed system: 4.114 ( $\pm 0.062$ ) TU (Takinosawa) and 4.184 ( $\pm 0.063$ ) TU (Otarunai), and 3.825 ( $\pm 0.07$ ) TU (Izariirisawa), 3.926 ( $\pm 0.061$ ) TU (Honryujoryu). On February 2016, the Oturunai river water sample collected at winter baseflow had 3.838 ( $\pm 0.061$ ) TU indicating similar tritium concentrations at subsurface water of the Izariirisawa and Honryujoryu catchments. For these headwater catchments, we found unique mean transit times (MTTs) using the exponential(70%)-piston flow(30%) model (E70%PM) LPM and very low MTT aggregation errors with the long-term tritium record of Tokyo precipitation scaled for Hokkaido groundwater recharge using wine data. This result suggests that their low tritium concentrations are not ambiguous anymore for the MTT interpretation. However, nine river samples from six other catchments produced up to three possible MTT values with E70%PM due to the interference by the tritium from the atmospheric hydrogen bomb testing 5–6 decades ago. We show that tritium in Japanese groundwater will reach natural levels in a decade, when one tritium measurement will be sufficient to estimate a robust MTT, while using a series of tritium measurements over the next few years with 3 year intervals will enable us to determine the correct MTT without ambiguity in this period. Unique MTTs obtained from tritium-tracer allow us to improve numerical models and to estimate groundwater storage volumes for sustainable water resources management.

### References:

Gusyev M.A., Morgenstern U., Stewart M.K., Yamazaki Y., Kashiwaya K., Nishihara T., Kuribayashi D., Sawano H. and Y. Iwami (2016). Application of tritium in precipitation and baseflow in Japan: a case study of groundwater transit times and storage in Hokkaido watersheds. *Hydrol. Earth Syst. Sci.*, 20, 1-16, doi:10.5194/hess-20-1-2016

Keywords: river water sampling, tritium isotope, lumped parameter model (LPM), mean transit time (MTT)

# Effect of Roughness Lengths on Surface Energy and the Planetary Boundary Layer Height over High-altitude Ngoring Lake

\*Zhaoguo Li<sup>1</sup>

1. Key Laboratory of Land Surface Process and Climate Change in Cold and Arid Regions, Northwest Institute of Eco-Environment and Resources, Chinese Academy of Sciences

The high-altitude lakes in the Tibetan Plateau (TP) have a unique roughness length distributions and atmospheric boundary layer variation characteristics. However, how different types of roughness lengths affect the lake surface energy exchange and the planetary boundary layer height (PBLH) remains unclear in the TP lakes. In this study, a tuned Weather Research and Forecasting (WRF) model version 3.6.1 was used to investigate the responses of the freeze-up date, turbulent flux, meteorological variables, and PBLH to surface roughness variations in the Ngoring Lake. Of all meteorological variables, the lake surface temperature responded to roughness length variations most sensitively, increasing roughness lengths can put the lake freeze-up date forward. The effect of momentum roughness length on wind speed was significantly affected by the fetch length. An increase in the roughness length for heat can increase the nightly PBLH during most months, especially in the central lake area in autumn. The primary factors that contribute to sensible heat flux (H) and latent heat flux (LE) were the roughness lengths for heat and momentum, respectively. Although the momentum roughness length also had an important effect on the sensible heat flux, there was no obvious correlation between H and the PBLH.

Keywords: Lake ice , Lake temperature, Roughness length, Turbulent flux , Tibetan Plateau

## Seasonal changes of dissolved CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub>O in a subtropical reservoir, Guangdong, China

\*Yang Zhenglun<sup>1</sup>, Xing Li<sup>2</sup>, Changyuan Tang<sup>1</sup>, Han Zhang<sup>1</sup>

1. Graduate School of Horticulture, Chiba University, Japan, 2. School of environmental science and engineering, Sun Yat-sen University, China

Million dams have been built around the world to providing many services for people. However, recent shallow subtropical and tropical reservoirs have been argued as a source of the greenhouse gases (GHGs). The changes of dissolved GHGs is key to control their emissions processes from the reservoirs. In order to understand the generation and release process of dissolved gases such as N<sub>2</sub>O, CO<sub>2</sub> and CH<sub>4</sub> in the period with and without thermocline, the Lianhe Reservoir, a typical subtropical reservoir in southern China has been chosen. The field surveys have been conducted to measure DCO<sub>2</sub> (dissolved CO<sub>2</sub>), DCH<sub>4</sub> (dissolved CH<sub>4</sub>), DN<sub>2</sub>O (dissolved N<sub>2</sub>O) in September 2014, January 2015, June 2015 and September 2015.

The depths of reservoir changed from 25m to 30m depending on the operation for water supply. The thermocline forms in summer and disappears in winter. Accordingly, the vertical profiles of dissolved gases in summer were different from winter. DO value in the water column decreased with depth from 8.96mg/L to 0.15mg/L in summer, but was almost uniformly ranging from 7.41 to 8.59 mg/L in winter. In summer, concentrations of DCH<sub>4</sub>, DCO<sub>2</sub> and DN<sub>2</sub>O ranged from 0.49 μg/L to 795.10 μg/L, less than 0.001 mg/L to 1.32 mg/L and 1.06 μg/l to 3.47 μg/l, respectively. Also, concentrations of DCH<sub>4</sub>, DCO<sub>2</sub> and DN<sub>2</sub>O in winter changed from 0.43 μg/L to 0.85 μg/L, 0.81 mg/L to 3.50 mg/L and 0.85 μg/l to 3.09 μg/l, respectively. As a whole, the vertical distributions dissolved gases are affected by photosynthesis and associated biogeochemical processes. It was found that photosynthetic dominated the dissolved gasses in the top 5m think layer in the reservoir. Available sunlight becomes weaker with increase of depth, CO<sub>2</sub> concentration increased because respiration and metabolic activities of algae and DCH<sub>4</sub> concentration was highest in the bottom in summer. In the winter, the deep part of the reservoir changed from anaerobic environment to aerobic environment because DO was replenished in the overturn period, enhancing oxidation of methane to CO<sub>2</sub>.

Keywords: Reservoirthermocline, Greenhouse gas, Dissolved gas, Seasonal variation, Thermocline

## Effect of spatial resolution of rainfall on runoff modeling in urbanized basins: A case study of the Tsurumi river basin, Japan

\*Shakti P.C.<sup>1</sup>, Tsuyoshi Nakatani<sup>1</sup>, Ryohei Misumi<sup>1</sup>, Koyuru Iwanami<sup>1</sup>, Kohin Hirano<sup>1</sup>, Masayuki Maki<sup>2</sup>

1. Storm, Flood and Landslide Research Division, National Research Institute for Earth Science and Disaster Resilience (NIED), Tsukuba, Japan, 2. Kagoshima University, Kagoshima, Japan

The use of accurate information in rainfall-runoff models regarding the spatial variations of rainfall is essential for monitoring river discharge, and may help to improve our understanding of water balances. Spatial variations in the amount of precipitation are monitored using limited rain gauge networks with the help of various interpolation techniques which have been used in rainfall-runoff modeling in many cases. Limited and interpolated rain gauge data can introduce large uncertainties into predictions made by hydrological models. In recent years, different type of spatial and temporal resolution of radar estimated rainfall data has been considered in the hydrological computation. Several studies agree that use of high-resolution rainfall data to the hydrological model may offer more realistic output, but there is not a clear guideline about the optimum scale of spatial and temporal resolution for the radar rainfall data. The Ministry of Land, Infrastructure, Transport and Tourism (MLIT) established an X-band polarimetric radar network (XRAIN), which uses an operational data processing system developed by the National Research Institute for Earth Science and Disaster Resilience (NIED). XRAIN is composed of X-band MP (multi-parameter) radars, and has spatial and temporal resolutions of 250-m and 1-min, respectively. This product is one of the best high-resolution radar rainfall systems in the world, considered as an input to the Hydrologic Engineering Center's Hydrologic Modeling System (HEC-HMS) model to simulate runoff. The model was set up for the Tsurumi river basin ( $\approx 117 \text{ km}^2$ ) and it is located close to the Yokohama city of Japan. In this study, we selected some extreme rainfall events to simulate runoff separately. Different spatial resolution of rainfall data were generated from XRAIN radar rainfall for each event and applied into the model. Simulated runoff of each event was analyzed and compared each other separately and few remarks are drawn on using different spatial resolution of rainfall to the hydrological model for small urbanized basin.

Keywords: Hydrology, Weather radar, Spatial distribution of rainfall, Hydrological model, Urbanized basin, Runoff

## Monitoring wetland inundation dynamics from space using a fully automated multi-sensor mapping approach

\*Ben DeVries<sup>1</sup>, Wenli Huang<sup>1</sup>, Chengquan Huang<sup>1</sup>, Megan Lang<sup>2</sup>, John W. Jones<sup>3</sup>, Irena Creed<sup>4</sup>, Mark Carroll<sup>5,6</sup>

1. University of Maryland, College Park, MD, USA, 2. US Fish and Wildlife Service, National Wetlands Inventory, Falls Church, VA, USA, 3. US Geological Survey, Eastern Geographic Science Center, Reston, VA, USA, 4. Department of Biology, University of Western Ontario, London, ON, Canada, 5. Biospheric Sciences Lab, NASA Goddard Space Flight Center, Greenbelt, MD, USA, 6. Science Systems and Applications, Inc., Lanham, MD, USA

Surface water inundation drives myriad important wetland functions, including water storage, carbon sequestration, nutrient removal, and biodiversity. Reliable information on wetland inundation dynamics is often lacking, leading to large uncertainties when studying these functions. A number of regional to global-scale surface water products have been released in recent years using a variety of satellite data sources. However, their utility is limited due to their relatively coarse spatial and temporal resolution. The fusion of optical and synthetic aperture radar (SAR) data streams has been put forward as a way to enhance temporal resolution and leverage the inherent benefits of these two disparate data types. Harmonized methods are needed to achieve enhanced temporal resolution through the generation of consistent wetland inundation estimates. Here, we present novel algorithms for the automated mapping of inundation, making use of optical (Landsat and Sentinel-2) and SAR (Sentinel-1) data streams. Using a combination of static thresholds, spatial aggregation, inundation probability from time series imagery and random forest classifiers, these algorithms are shown to be efficient in deriving inundated surfaces from optical and SAR imagery without the use of externally derived training data. While both algorithms are highly scalable in both space and time, several key limitations will need to be addressed before generating regional dynamic inundation products, including: insufficient frequency of satellite overpasses; commission errors from dark surfaces in optical imagery; and challenges in quantifying sub-pixel inundated extent from SAR imagery, which is necessary to ensure consistency between data streams. Addressing these issues will allow for the generation of near-daily estimates of wetland inundation at the continental to global scale, representing a significant step forward in understanding wetland ecosystems in support of relevant policies and management strategies.

*The findings and conclusions in this article are those of the authors and do not necessarily represent the views of the U.S. Government.*

Keywords: Landsat, Sentinel, inundation, surface water, wetlands



## Numerical Simulations of Vertical Water Redistribution in Sand using COMSOL and HYDRUS Software

\*Abhishek Abhishek<sup>1</sup>, Luwen Zhuang<sup>2</sup>, S. Majid Hassanizadeh<sup>2</sup>

1. Indian Institute of Technology Roorkee, India, 2. Utrecht University, The Netherlands

Moisture redistribution process in porous media has a wide range of practical applications in petroleum industry, agriculture engineering, hydrology and carbon/CO<sub>2</sub> sequestration. Recently, a vertical water redistribution experiment was designed. A thin column with dimensions of 50 (height) by 1.2 cm (inner diameter) was employed. Five water tensiometers were mounted along the column at a distance of 1, 13, 25, 37 and 49 cm from the top. Two air tensiometers were mounted at 15 and 35 cm from the top to measure air pressure. Initially, the column was packed with saturated medium sand. The bottom of the column was open to the air to drain the sand gradually under gravity. Once the equilibrium had reached, the column was reversed to let moisture in the sand redistribute. During free drainage and redistribution processes, saturation was measured by gamma transmission method, and water and air pressure were measured by tensiometers. Numerical simulations were used to estimate saturation distribution over the whole column and the duration of experiments.

In this work, we used both 1D and 2D models using Richards equation to simulate this vertical redistribution process. Both COMSOL and HYDRUS-1D were used to solve 1D model, while COMSOL was employed to solve 2D model. In 1D simulations, equilibrium time is found to increase linearly during free drainage process, as the length of the column increases. It is 1.4 d for the length of 50 cm, which is employed in experiments. In 2D simulations, water saturation profiles are non-uniform along the width of the domain at earlier time steps, while become almost uniform when it reaches equilibrium. By comparison, the average saturation distribution along the column in 2D simulations considering different values of width is exactly the same as the one in 1D simulations. The simulated results are to be compared with experimental results.

Keywords: Water redistribution, Richards' equation, Tensiometers, Numerical Simulation

## Sulfonamides degradation and microbial responses in Riverbank Filtration(RBF) system: a laboratory column study

\*Ying Bai<sup>1,2,3</sup>, Xiaohong Ruan<sup>1,2</sup>, Jingwei Wu<sup>2</sup>, Jan Peter van der Hoek<sup>3</sup>

1. Key Laboratory of Surficial Geochemistry, Administration of Education, Nanjing University, China, 2. School of Earth Sciences and Engineering, Nanjing University, China, 3. Delft university of Technology, Department of Water Management, 1, 2628 CN Delft, The Netherlands

Contamination of drinking water sources by pharmaceutical activated compounds is emerging recently in the urban water cycle, which is an important issue related to human health, ecological effects (Benner et al. 2013). Antibiotic resistance genes (ARGs) are also increasingly regarded as emerging environmental contaminant.

the other hand, bank filtration has long been recognized as an effective and sustainable technique for pathogenic microbes and organic micro pollutants removal around the world (Tufenkji, Ryan and Elimelech 2002). River bank area which is characterized by gradients in light, temperature, redox potential, pH, oxygen, and carbon source, controls the intensity of biodegradation. It is frequently reported that the most significant biochemical changes related to microbial activity occurs in the early stages of bank infiltration process (Kedziorek, Geoffriau and Bourg 2008, Zhang et al. 2015, Ma et al. 2015).

The changing redox conditions in natural groundwater system would enhance a change in microbial activity, which is the main incentive of biodegradation intensity (Richter et al. 2009). In the biodegradation process of antibiotics in the environment, redox condition as long as carbon source supply controls the microbial activity, and are the main factors controlling the intensity (García-Galán et al. 2008). Benno et al. proved that sulfamethoxazole was more effectively degraded under aerobic than under anoxic conditions and the availability of DOC fosters SMX removal (Baumgarten et al. 2011). Raffaella et al. noticed an increasing degradation rate of p-TSA in groundwater due to the microbial adaption to the change of redox condition (anoxic to oxic) (Meffe et al. 2012). Doreen et al. also found out p-TSA and o-TSA were redox-sensitive compounds and preferably degraded in the presence of O<sub>2</sub> (Richter et al. 2009). Jette et al. studied direct metabolism of three sulfonamides (sulfanilamide (SAA), sulfadimethoxine (SDT), and sulfapyridine (SPY)) through enzymatic catalysis by the fungal laccase from *Trametes versicolor* in soil. So it is imperative that we improve understanding of the processes and environmental factors that govern the fate of sulfonamides in the riverbank filtration process (Mohatt et al. 2011).

In this paper, two independent RBF soil column pilots (3 columns and 7 columns) were constructed and five sulfonamides including Sulfapyridine, Sulfadiazine, Sulfamethoxazole, Sulfamethazine and Sulfaquinoxaline were selected as the target antibiotics. The object of this research include: 1) contrasting the attenuation dynamic and migration behavior of sulfonamides in monitored RBF system under different redox condition and retention time, 2) examining microbial community structure dynamic in porous aquifer media and its effect on sulfonamides removal rate, 3) investigating sulfonamides resistance gene (sul1, sul2) abundance and accumulation mechanisms during riverbank filtration and the risk posted on drinking water safety. By analyzing the different attenuation behavior of sulfonamides in two pilot systems, and the microbial responses to this environment pressure, we can further deduce the effect of hydrological retention time, redox condition and microbial activity and community structure had on sulfonamides degradation during MAR process.

Keywords: River bank filtration, Antibiotics, Antibiotics resistance genes

## Column experiments for nitrate attenuation in groundwater using reed and bamboo chips in phosphorus restrictions environment

\*Shunichi Satake<sup>1</sup>, Changyuan Tang<sup>1</sup>

1. Graduate School of Horticulture, Chiba University

Nitrate pollution of groundwater is one of the environmental issues in the world. Wetland and riparian zone play a very important role on removing nitrate from groundwater through denitrification where denitrifying bacteria reduce nitrate to nitrogen gas. In past decades, such natural attenuation has been enhanced in a low cost by using wood chips as the carbon sources available for denitrifying bacteria. However, its performance depends on largely on phosphorous that is an indispensable element of organisms and plays an important role in biological metabolism. Phosphorous concentration is often limited in groundwater even those polluted by nitrate under the natural condition.

In order to study the effect of phosphorous on denitrification efficiency, column experiments have been conducted by using reed or bamboo chips as denitrification materials. It was found that the  $\text{NO}_3\text{-N}$  removal efficiencies decreased from 86.1% to 61.6% for reed and from 73.6% to 37.0% for bamboo when the phosphate-P concentration of influents declined from 0.4 mg/L to 0.04 mg/L. In addition,  $\text{NO}_2\text{-N}$  concentration was detected high in the effluent from the column filled with bamboo chips when the phosphate-P concentration was low.  $\text{NO}_3\text{-N}$  removal rate was estimated by the Michaelis-Menten equation. The half-saturation constant for phosphate-P concentration was 0.03 mg/L for reed and 0.09 mg/L for bamboo, indicating that phosphorous is the key to control  $\text{NO}_3\text{-N}$  removal rate. Therefore, the  $\text{NO}_3\text{-N}$  removal rate in groundwater with plant chips can be expected high when N/P ratio is around 100.

Keywords: Nitrate nitrogen, Plant chips, Denitrification, Phosphate-P


# Assessing the effect of climate change on the hydrology of the Wainganga River basin using VIC model

\*Arun Kumar Taxak<sup>1</sup>, Dhyan S Arya<sup>1</sup>

1. Indian Institute of Technology Roorkee

Climate change is one of the most important global environmental challenges, which affects the entire earth system in terms of negative impacts on food production, water supply, health, livelihood, energy, etc. The study aims to assess the long-term impact of on the streamflows in the Wainganga basin at Ashti station for period 1951-2014. The Wainganga basin is the biggest sub-basin of the Godavari and accounts for nearly 1.56% of the total geographic area of India and 16.45% of the total area of the Godavari basin. Wainganga is an agricultural basin with around 51% under cultivation land. Changing climate can have huge impact on the livelihood of the people. Precipitation has decreased by 7.95% in the basin during the study period while temperature have increased by 0.48°C. Variable Infiltration Capacity (VIC) model was used for simulating streamflows. 20 years' durations were selected as calibration (1970-1989) and validation (1990-2009) periods. Daily NSE, COD and RE of 0.85, 0.92 and 2.6% and, 0.84, 0.92, and 1.45% were obtained during calibration and validation of the model respectively. Analysis demonstrates a significant decreasing trend in the basin showing 15.02% decrease in mean annual flows. The decrease is due to decrease in precipitation and increase in losses due to increased temperature. The study contributes to the knowledge and understanding of the climate change impact on the local catchment level.

Keywords: Climate change, hydrological modelling, VIC model, streamflow

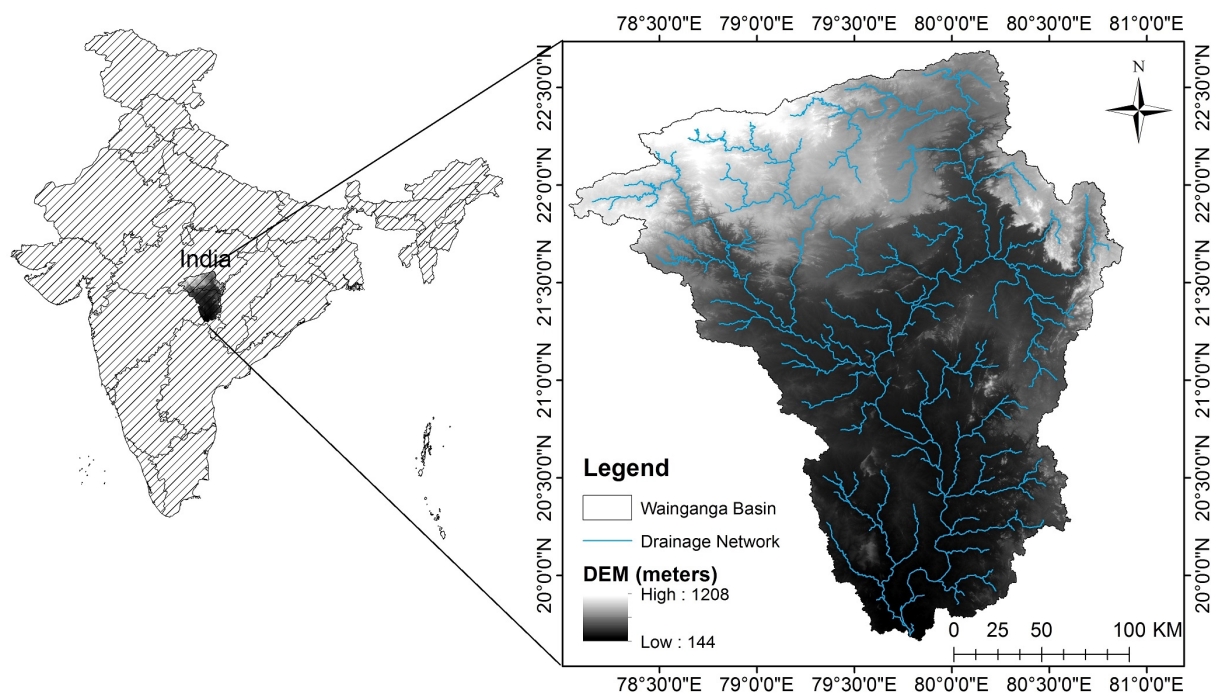

# Numerical simulation of the climate effect of high-altitude lakes in the Tibetan Plateau

\*Yinhuan Ao<sup>1</sup>, Zhaoguo Li<sup>1</sup>

1. Key Laboratory of Land Surface Process and Climate Change in Cold and Arid Regions, Northwest Institute of Eco-Environment and Resources, Chinese Academy of Sciences

Lakes regulate the water and heat exchange between the ground and the atmosphere on different temporal and spatial scales. However, studies of the lake effect in the high-altitude Tibetan Plateau (TP) are gradually performed until recently and little attention was paid to modelling of frozen lakes. In this study, we employ the WRF v3.6.1 model to conduct the three groups of long-term simulation experiments of Ngoring Lake basin in the TP (original experiment, experiment with a tuned model, and no-lake experiment). Based on these experiments, we evaluate the effect of model improvement on the simulation in the high-altitude lake basin, and investigate the influence of lake on the regional climate. After the lake depth, the roughness lengths and initial surface temperature are corrected in the model, the simulation of the air temperature is distinctly improved. In the experiment with a tuned model, the simulated H on the lake surface is also clearly improved, especially during the periods of ice melting (from late spring to early summer) and freezing (late fall). However, the H on the lake ice is predominantly negative, which exhibits a relatively large difference from the observation. The improvement of LE is primarily manifested by the rapid increase in the correlation coefficient between the simulations and observations, whereas the improvement in the averaged LE is relatively small. The initial surface temperature improvement shows most prominent effect in the first year, and which distinctly weakens after a freezing period. After the lake becomes the grassland in the model, the daytime temperature clearly increases during the freezing and melting periods, the nocturnal cooling appears in other time, especially from September to October. The annual mean H increases by 6.37 times in the regions of original Ngoring Lake and Gyaring Lake areas, and the LE declines by 56.17%. The sum of H and LE increases from 71.23 W m<sup>-2</sup> (with lake) to 84.58 W m<sup>-2</sup> (without lake). For the entire simulation region, the sum of H and LE also increases slightly. After the lakes disappear, the air temperature increases significantly over the two lakes from June to September, and a typical abnormal convergence field forms. At the same time, the precipitation clearly increases in the original two lakes and surrounding areas, whereas the precipitation generally decreases in other regions. The pattern of the precipitation increase region is consistent with the inter-annual variation of the convergence field.

Keywords: lake effect, Tibetan Plateau, frozen lake, latent heat flux, precipitation

# Meteorological drought change evaluation using comparative standardized precipitation index with d4PDF future and past experiments

\*Akira Hasegawa<sup>1</sup>, Maksym Gusyev<sup>1</sup>, Yoichi Iwami<sup>1</sup>

1. International Centre for Water Hazard and Risk Management, Public Works Research Institute

Meteorological drought defines a baseline for the other droughts, such as hydrological, agricultural, and socio-economic droughts. Meteorological drought indices are simply derived using only the meteorological variables, such as precipitation and temperature. The standardized precipitation index (SPI) is used by national meteorological and hydrological services around the world to characterize the meteorological droughts on multiple timescales longer than 1 month. The SPI is computed as follows. The cumulative distribution function (CDF) of the gamma distribution is fitted with the aggregated precipitation dataset at a desired timescale. The fitted CDF is converted to the standardized normal distribution, and the SPI value is computed as the standard score, or Z-score, of the corresponding precipitation. Due to the standardization, the 50th percentile value of precipitation is converted to SPI=0, and the 84.13th and 15.87th percentile values are converted to SPI of +1 and -1, respectively. The SPI values less than -1 are generally treated as the meteorological drought.

The comparative SPI (cSPI) is an extension of the SPI and was developed for meteorological drought assessment under climate change as well as monitoring drought hazards by dividing the input dataset of precipitation into the reference and target datasets. The CDF parameters are estimated with the reference dataset, and the precipitation of the target dataset is converted to the Z-score of the standardized normal distribution related to the CDF using the parameters estimated from the reference dataset. This cSPI approach enables us to estimate the shift of the central condition of the target dataset and the probability changes of dry and wet conditions in the target dataset on the basis of the reference dataset.

The d4PDF (database for Policy Decision-making for Future climate change) consists of three sets of experiments using a general circulation model with 60-km horizontal grid developed by Meteorological Research Institute of Japan: historical climate experiment (100 runs, 60 years from 1951 to 2010), non-warming past experiment (100 runs, 60 years), and +4K future climate experiment (90 runs, 60 years). We compute cSPI of the non-warming past and +4K future climate experiments on the basis of 100 members of the historical climate ensemble experiment, respectively. We demonstrate the changes in the central conditions and in the probabilities of dry and wet conditions with cSPI due to the anthropogenic global warming in future (+4K vs. historical) and past (non-warming vs. historical) climate experiments.

## References:

Hasegawa, A., M. Gusyev, T. Ushiyama, J. Magome, and Y. Iwami (2015) Drought assessment in the Pampanga River basin, the Philippines --- Part 2: A comparative SPI approach for quantifying climate change hazards, in "MODSIM2015, 21st International Congress on Modeling and Simulation", ISBN:978-0-9872143-5-5, 2388-2394, <http://www.mssanz.org.au/modsim2015/L13/hasegawa.pdf>.  
Hasegawa, A., M. Gusyev, and Y. Iwami (2016) Meteorological drought and flood assessment using the comparative SPI approach in Asia under climate change, J. of Disaster Research, 11(6), 1082-1090, DOI:10.20965/jdr.2016.p1082.

Keywords: meteorological drought, comparative SPI, anthropogenic impacts, climate change, d4PDF





# Evaluating Dynamically and Statistically Downscaled Climate Model for Rainfall Extreme: A Case from Karnali Basin in Western Nepal

\*Jeeban Panthi<sup>1</sup>

## 1. Small Earth Nepal

It is well agreed that the climatic extremes events are increasing in last few decades and many scenarios have predicted that those events will increase also in future. There are is an agreement among the climate models on the future increase in temperature, however in case of rainfall, there is a high uncertainty. The global climate models are downscaled either by using the local topography (dynamic) or by establishing a relationship of local weather with the large scale atmospheric phenomenon (statistical). In this paper we attempt to analyze the rainfall extreme events with the dynamically downscaled regional climate models and GCM informed statistically downscaled models for a data scare region of Nepal-Karnali basin. We tested the performances of CORDEX South Asia data and downscaled at the station scale using the SDSM 5.2 (Decision Centric) by providing the GCM informed climate scenarios.

Keywords: Rainfall, Himalayas, Extreme, Models

# Evaluation of Uncertainty in Long-term Rainfall-Runoff Forecast for Development of Long-term Prediction Based Water Management System

\*SooHee HAN<sup>1</sup>, Chanyoung SON<sup>1</sup>, Younghyun CHO<sup>1</sup>, Aesook SUH<sup>1</sup>

## 1. Hydrometeorological Cooperation Cenetr

The needs for probabilistic long-term forecast is growing more urgent than ever recently with climate change, because of the greater uncertainty in precipitation, the heightened frequency and intensity of natural disasters such as flood and draught, and the increased social demand for stable water supply. Korea Meteorological Administration, a governmental agency, is currently running a long-term forecast using GloSea5, a global seasonal prediction system, but few research has been done on utilization and application of said system in water management. In this study, we focused on Yongdam Dam and Namgang Dam, the most notable multipurpose dams in Korea's Geum and Nakdong river watershed, respectively; extracted GloSea5's long-term rainfall forecast data (for max. 6 months) for these areas; compared the data with observations and conducted bias correlation on the quantitative differences by the quantile delta mapping (QDM) method; and thereby assessed and measured the accuracy of and the uncertainty in the GloSea5 predictions. In addition, we conducted a long-term runoff analysis taking into account the uncertainty in long-term forecasts, by means of K-DRUM, a distributed rainfall-runoff model generally adopted in dam operations, seeking to establish a long-term plan for dam operation. Our analysis results suggested we could considerably mitigate the quantitative gap between observations and long-term forecasts using the QDM method. The outcome also showed representable patterns comparatively similar to observations. And the result of long-term runoff verification included the observation data within its confidence interval after considering the uncertainty, sufficiently supporting the feasibility of a long-term operation plan for dams. This study concludes it is possible to maintain stable water storages and to plan for water level management by utilizing long-term forecast techniques.

Keywords: GloSea5 Model, Long-term Prediction Forecast, Distributed Rainfall-Runoff Model, Evaluation of Uncertainty

## Using HECHMS and WASH123D for operational water stage forecasting of KaoPing River in Taiwan

\*Cheng-Hsin Chen<sup>1</sup>, Ya-Chi Chang<sup>1</sup>, Ming-Chang Wu<sup>1</sup>, Dong-Sin Shih<sup>2</sup>, I-Chun Hung<sup>3</sup>


1. Taiwan Typhoon and Flood Research Institute, National Applied Research Laboratories, 2. Department of Civil Engineering, National Chung Hsing University, 3. Department of Civil Engineering, National Central University

Extreme typhoon rainfall over Taiwan usually causes severe flood damage. Since the impacts of flooding may include social, economic and environmental problems, it is very important to establish a local flood warning system to prevent or mitigate flood disasters.

In 2010, Taiwan Typhoon and Flood Research Institute (TTFRI) started Taiwan Cooperative Precipitation Ensemble Forecast Experiment (TAPEX) that was designed for providing skillful typhoon predictions to related agencies such as CWB, NCHC, SWCB, WRA, and NCDR. To date, TAPEX has included 26 members and is run operationally 4 times a day. In each run, the 72 hours precipitation forecasts are provided.

The purpose of this study is to establish an operational local water stage forecasting system for KaoPing River in Taiwan using HECHMS as a runoff model and WASH123D as a 1D/2D coupling flood model. Precipitation forecasts provided by TAPEX are used in the forecasting system as the input rainfall data. The performance of the developed forecasting system is verified using rain gauge data and observed water stage data. In addition, a web based data monitoring system is constructed for not only collecting real-time observed data, but also displaying the model results compared with observed data.

Keywords: HECHMS, WASH123D, operational, TAPEX

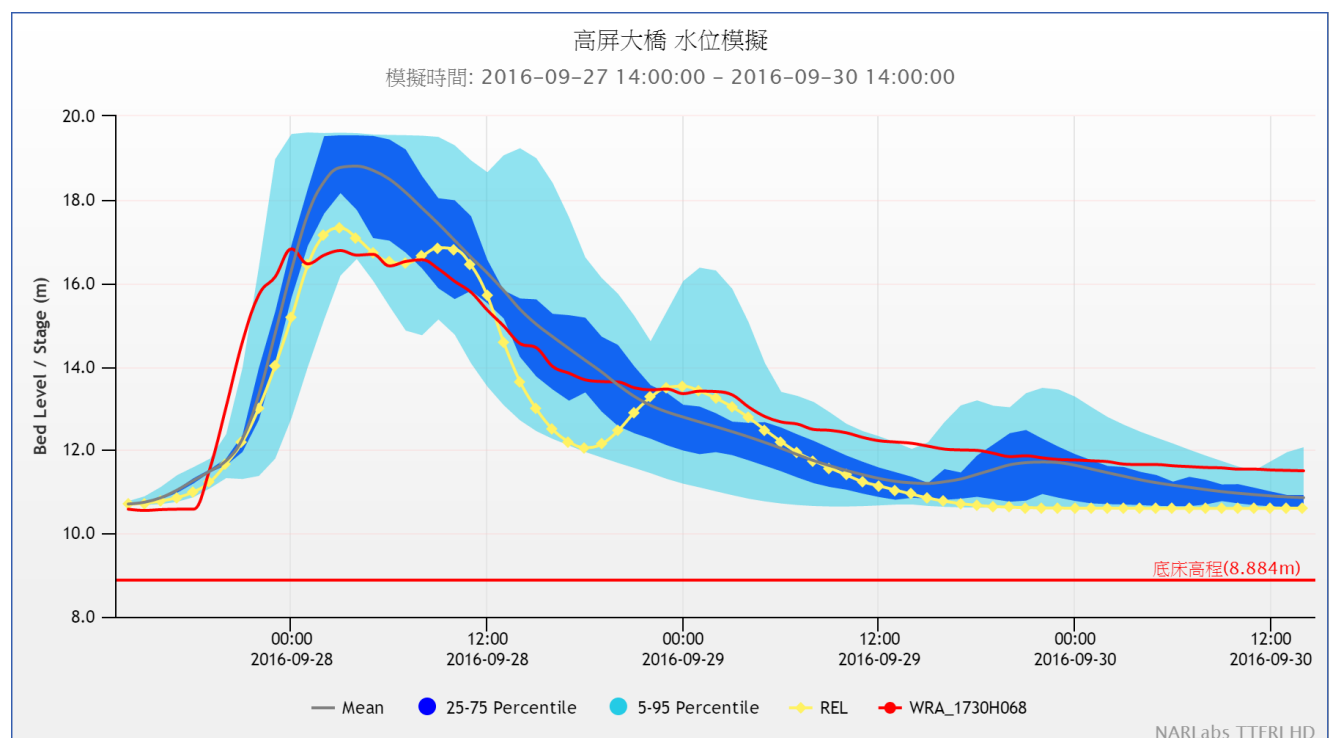

# Infrared Sounding Observation of Soil Moisture and Relationship with Skin Temperature

\*Daniel K Zhou<sup>1</sup>, Allen M Larar<sup>1</sup>, Xu Liu<sup>1</sup>

1. NASA Langley Research Center

We have developed a simple, yet effective scheme to derive volumetric soil moisture (VSM) using infrared (IR) land surface emissivity retrieved from satellite measured IR spectral radiance. This novel scheme is applied to a 10-year period of global IR emissivity data retrieved from MetOp-A Infrared Atmospheric Sounding Interferometer (IASI) measurements. The VSM calculated from these IR emissivity data (denoted as IR-VSM) is compared with that routinely retrieved from satellite microwave (MW) multi-sensor measurements (denoted as MW-VSM). Monthly-mean spatially-gridded climatology datasets are then generated to demonstrate VSM spatial variation as well as its seasonal-cycle and inter-annual variability. Positive agreement is shown to exist between IR- and MW-VSM. The relationship between soil moisture and surface skin temperature, as well as the skin temperature diurnal difference (denoted as dTs), were examined globally using the land surface skin temperature (denoted as Ts) retrieved from the same measurements of IASI. We are able to draw the conclusion that both skin temperature and skin temperature diurnal differences follow an inverse relationship with soil moisture.

Keywords: Remote sensing, Infrared, retrieval, soil moisture, skin temperature

## Simulating soil moisture dynamics in the overexploited Indo Gangetic alluvium area in Central Punjab, India

\*Sakambari Padhi<sup>1</sup>, R. Rangarajan<sup>2</sup>, Tomochika Tokunaga<sup>1</sup>

1. Department of Environment Systems, Graduate School of Frontier Sciences, The University of Tokyo, Kashiwa, Chiba- 2778563, Japan, 2. Ground Water Division, National Geophysical Research Institute, Uppal Road, Hyderabad-500007, India

In arid and semiarid areas, accurate estimation of groundwater recharge is essential for sustainable management of water resources. In the Indo-Gangetic alluvial plains of Punjab region, India, groundwater is the main source of irrigation. Insufficient rainfall associated with intensive cultivation in the alluvial plains of this region has resulted in the degradation of groundwater regime both in quality and quantity. In view of moderate to low rainfall in the region, return flow from applied irrigation is likely to be a major source of groundwater recharge. In this study, we estimated the contribution of irrigation return flow on groundwater recharge in paddy fields by modeling water flow in the vadose zone using the HYDRUS-1D software and compared the results with the estimated recharge on a rainfed site by the injection of tritium.

Three representative sites in the alluvial plain were selected, one rainfed site and two fields under rice cultivation. For each site, soil moisture was monitored in situ by vertical neutron probe surveys. The hydraulic properties of the soils at the site were determined using in situ experiments and laboratory measurements. Tritium was injected at selected sites and groundwater recharge was estimated from the depth profile of tritium.

At each site, the 1-dimensional flow model was calibrated using climate, soil hydraulic property, and groundwater levels data, and was validated using the measured soil moisture content. Good agreement was achieved between the HYDRUS-1D simulations and field measurements of moisture content for both rainfed and paddy cultivated sites. Based on the calculated results, unsaturated moisture influx was estimated.

Keywords: Irrigation return flow, Soil moisture dynamics, Modeling

## Development and Application of a Distributed Source Pollutant Transport Model Based on BTOPMC

\*bo hong zhang<sup>1</sup>, Tianqi Ao<sup>2</sup>, Gusyev Maksym<sup>3</sup>, Xiaodong Li<sup>2</sup>, Haijun Wang<sup>1</sup>, Juan Liu<sup>1</sup>

1. KMUST, 2. SCU, 3. ICHARM

Agricultural non-point and industrial point sources are contributing nitrogen and phosphorus concentrations in Chinese catchments and these pollutants cause degradation of river water quality for a long distances. To evaluate these impacts, a distributed pollutant transport model was developed on the basis of BTOPMC (Block-Wise Use of TOPMODEL with Muskingum-Cunge Method), a grid-based distributed hydrological model. In this model, the water flow routing process of BTOPMC is the carrier of pollutant transport and these pollutants are washed off with a direct runoff. Pollutant flux for each grid is simulated based on mass balance of pollutants within the grid and pollutant transmission occurs between grids in the direction of the water flow on daily time steps. The model was tested in the study area of the Lu county area situated in the Laixi river basin in the Sichuan province of southwest China. The simulated concentrations of nitrogen and phosphorus are compared with the available monthly data at several water quality stations. These results demonstrate a greater pollutant concentration in the beginning of high flow period indicating the main mechanism of pollution transport. From these preliminary results, we suggest that the distributed pollutant transport model can reflect the characteristics of the pollutant transport and reach the expected target.

Keywords: Pollutant transport, BTOPMC, Distributed hydrological model, Muskingum-Cunge Method, Modeling

# Reexamination of Nitrogen Loading in Inbanuma Basin

\*Masaki Horie<sup>1</sup>, Akira Hama<sup>2</sup>, Yoko Fujimura<sup>3</sup>, Akihiko Kondoh<sup>4</sup>

1. Faculty of Science, Chiba University, 2. Graduate School of Science, Chiba University · JSPS Research Fellow, 3. Former Chiba Prefectural Environmental Research Center, 4. Center for Environmental Remote Sensing, Chiba University

## 1.Introduction

Nitrogen circulation is mentioned as one of the most serious environmental factors due to global nitrogen excess and nitrogen saturation. In Japan, we are planning to improve the water quality by establishing Lake Water Quality Conservation Plan against the eutrophication problem of closed watershed. Inbanuma Lake in Chiba Prefecture is one of the designated lakes, and the generated pollutant load amount using the unit loads is calculated in the Lake Water Quality Conservation Plan. However, since it uses the same unit loads for the past 30 years, it is considered necessary to reevaluate, and new values were proposed for some items in Fujimura (2015). Therefore, in this study, I prepared two nitrogen load amount distribution maps of the Inbanuma basin from the unit loads of the Lake Water Quality Conservation Plan and Fujimura (2015) unit loads, and compared the load amounts of the two distribution maps and studied the unit loads.

## 2.Research method


First, the nitrogen load amount was calculated for each section divided by the administrative circle and catchment area for each incoming river. Nitrogen load amount was calculated by multiplying the unit loads by the 2010 statistical data provided by the Water Quality Conservation Division of the Environmental Department, Chiba Prefecture. The load amount can be classified into living load from residential land, animal husbandry load from livestock, natural loads which are surface source pollution loads such as forest and upland field, and work site load from workplaces. Next, in the 2007 land use map created by the Inbanuma Basin Water Circulation Revitalization Council, I set the living load amount in the residential land, the livestock load amount in the field, the work site load amount in the urban area, and the natural load amounts were allocated for each land classification such as forest and upland field. Finally, nitrogen load amount distribution maps were created by dividing into 250 m mesh. In order to investigate the adequacy of the load amount in two distribution maps, I set catchment areas with the water quality measurement points of the total nitrogen concentration as the outlet, and compared the nitrogen load amount in the catchment areas with the measured nitrogen outflow at the outlets. Nitrogen outflow was calculated from the total nitrogen concentration measured by the Water Quality Conservation Division of the Environmental Department, Chiba Prefecture and the flow rate measured by the Inbanuma Basin Water Circulation Revitalization Conference.

## 3.Result and Discussion


Since a good linear relationship was shown between the nitrogen load amount and the nitrogen outflow in each catchment area in the Inbanuma basin, it was shown that the nitrogen load amount in the catchment area increases the nitrogen outflow of the river. When the unit loads of the Lake Water Quality Conservation Plan was used, the slope of the regression line was 1.40, and the nitrogen outflow greatly exceeded the nitrogen load amount, so there is a possibility that the nitrogen load amount is largely underestimated. On the other hand, when using the proposed unit loads of Fujimura (2015), the slope was 1.09, and the nitrogen load amount was approximately proportional to the nitrogen outflow. However, there is a possibility of underestimating the nitrogen load amount obtained in the proposed unit loads, since in the actual outflow process, nitrogen is considered to be decreased by the denitrification process, and it is unlikely that the nitrogen outflow exceeds the nitrogen load amount. In addition, the nitrogen outflow used in this study was calculated from the observed value at the time of flat water, and

the nitrogen outflow caused by the first flash at rainfall was not considered. Therefore, there is a possibility that the value is underestimated not only in the unit loads of the Lake Water Quality Conservation Plan but also in the proposed unit loads.


Keywords: nitrogen circulation, unit load, denitrification

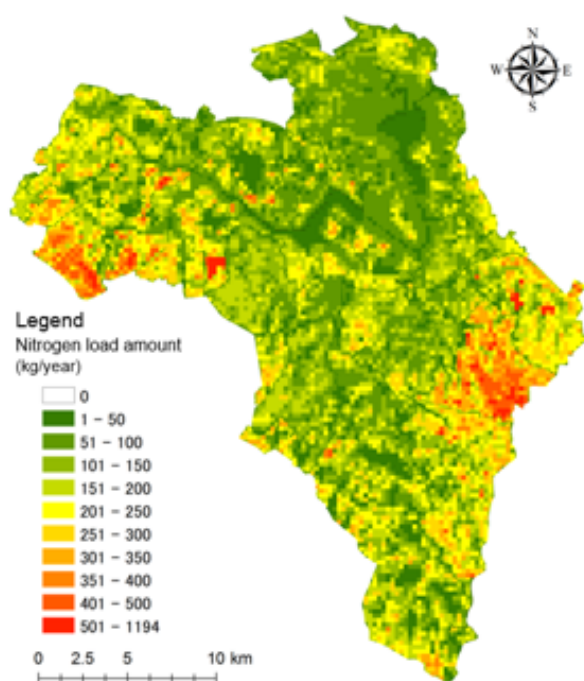

Nitrogen load amount distribution map  
~Unit load of Lake Water Quality Conservation Plan~

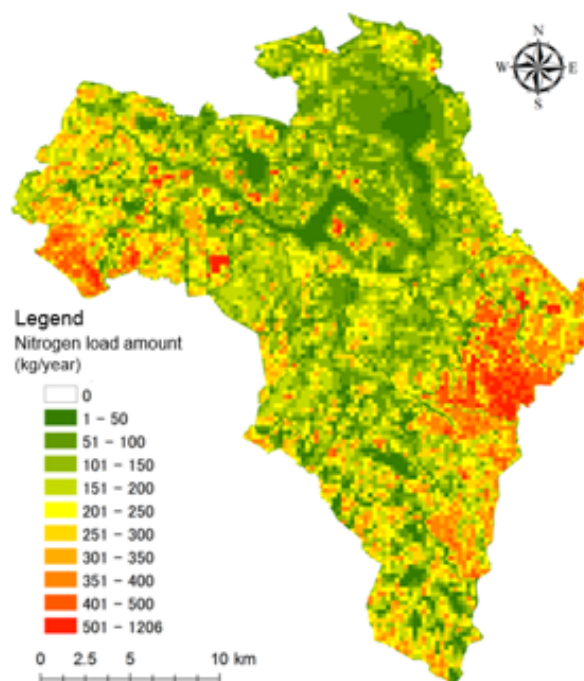


Nitrogen load amount distribution map  
~Unit load of Fujimura (2015)~

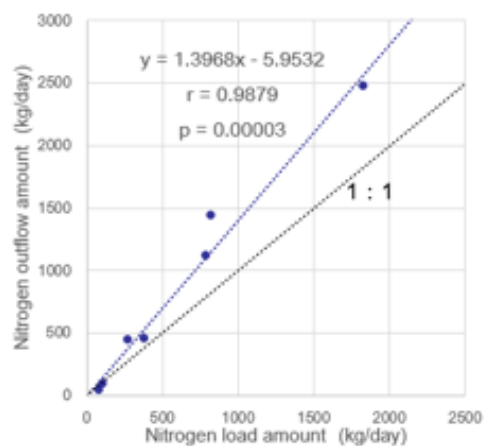

**Unit load of Lake Water Quality Conservation Plan**

Diagram showing the relationship between nitrogen load amount and nitrogen outflow amount

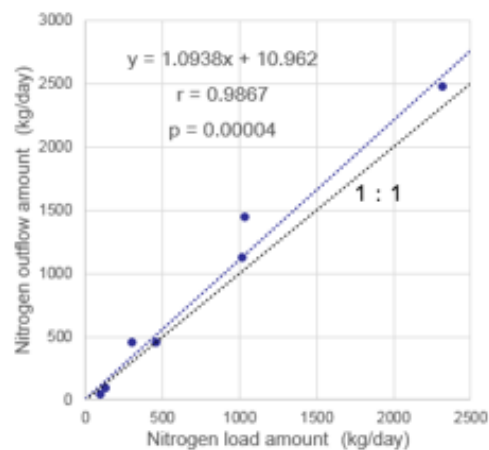

**Unit load of Fujimura (2015)**

Diagram showing the relationship between nitrogen load amount and nitrogen outflow amount



## Mercury speciation in fish muscles from Lake Biwa and human health risk assessment

\*Osamu Nagafuchi<sup>1</sup>, Koyomi Nakazawa<sup>1</sup>

1. Fukuoka Institute of Technology

Fish are exposed to metals via both aqueous and dietary routes. Some metals such as mercury (Hg) come mainly from dietary sources, with accumulation from aqueous routes providing a small contribution to the total Hg burden. Many studies have been conducted to understand the Hg accumulation focused on marine fish, however, only a few study has been conducted in fresh water. People who live near lake may also eat fresh water fish as well as marine fish. Therefore, it is important to understand the mercury concentration in fresh water fish as well as marine water fish. In our study, mercury concentration and other metals in fish was measured caught from Lake Biwa, the largest lake in Japan. Result from mercury concentration in fish, we estimated the human health risk caused from fish intake. Sampling was conducted during May 2011 to May 2012 sampling campaign. 82 fish sample, plankton sample, and water sample were sampled in Lake Biwa. Mercury concentration in fish muscle tends to be high as the trophic level going up.

Keywords: mercury, fish, Lake Biwa

## Regional characterization of river and spring waters by trace element signature

\*tatsuya hiraoka<sup>1</sup>

1. Tokyo University of science

Development of analytical techniques for chemically specifying the production place of foods are expected for food safety. We have been developing analytical techniques for the provenance analysis of foods. From last year, we started an investigation of river water and spring water designated “the best 100 natural water sources in Heisei period1)” Water is a key material for provenance analysis of agricultural and forest commodities, because water is one of essential resources in the cultivation of vegetables and agricultural crops. It is thus expected that trace element information of water will be an important indicator for distinguishing the production area. The purpose of the present study is to confirm the idea that trace element signature of water reflect the local geology and hence that of a plant reflects the geology of the area.

Natural water samples from 40 points (16 rivers and 24 springs) were collected into polyethylene containers with 3% Nitric acid and have been stored in a cold dark place (~4°C). Any precipitates in water samples were removed by a filtration using a membrane filter (pore size 0.45  $\mu$ m) prior to the analysis. Na, Mg, K, Ca, and Si were analyzed by using ICP-AES (inductively coupled plasma emission spectrometer: SPS3520UV), other trace elements were analyzed using a quadrupole ICP-MS (mass spectrometer: Agilent 7500c). REE (Rare earth elements) were concentrated before analysis with Novias chelate resin. <sup>115</sup>In was added to each water sample as an internal standard. Concentrations of more than 20 elements in the water samples were quantified by a calibration method.

At first we look for possible sources of characteristic trace elements in water samples detected by our analyses. We have observed that concentrations of Li were characteristically high in the river water samples from Arakawa river (Fukushima Pref.), Kanna river (Gunmma Pref.), and Kinpusan Mizugakiyama (Yamanashi Pref.). We have noticed that source rivers of these rivers flow granite geology. It is found that concentrations of Li in the other river waters running without granitic geology were not so high. Therefore, it is possible to say that Li may reflect the granite geology. It is found that spring water of

“Yuminosyouzu” in Toyama prefecture shows high concentrations of REEs. Sedimentary rocks are widely distributed in the vicinity of “Yuminosyouzu”. It is estimated that weathering of apatites contained in the sedimentary rocks may elute REE as phosphates2). Similarly, the highest concentrations of Mg and Ca among analyzed samples were observed in water samples from the “Matsumoto Joukamati Yuusuigun” in Nagano Pref. Mg is thought to be influenced by tuff stone accumulating in the vicinity of the source Utukushigahara Plateau and Ca is considered to be influenced by limestone3).

From these observations, it is found that trace element compositions of the spring and river waters tend to reflect their background geology. We will further analyzed water samples all over Japan to find key elements which may reflect origin of water and to apply these information for provenance analysis of foods and woods.

1) S. Yabusaki et al.: Journal of Groundwater Hydrology 51, 127-139 (2008) (in Japanese).

2) S.J. Köhler et al.: Chemical Geology 222, 168-182 (2005).

3) S. Yabusaki: Bulletin of Geo-Environmental Science, 13, 33-41 (2011) (in Japanese).

Keywords: water, trace element, ICP-MS / AES

## Relation between water component and geological conditions in Izu Islands

\*Hiroko Omori<sup>1</sup>, Rei Omiyama<sup>1</sup>, Emi Kinoshita<sup>3</sup>, Mana Yasui<sup>2</sup>, Atsushi Yamazaki<sup>2</sup>, Hiroshi Hagiya<sup>1</sup>

1. Tokyo City University, 2. Waseda University, 3. Asano Taiseikiso Engineering Co.,Ltd

The relationship between the geological characteristic and groundwater compositions was investigated. 147 water samples were collected from Izu Islands, including Izu Oshima, Toshima, Miyakeshima, Hachijoshima, Niijima, and Kouzushima. The water samples were analyzed for cations and anions by using Ion Chromatography and Inductively Coupled Plasma Atomic Emission Spectroscopy. Chemical composition of rock samples at 83 locations on each islands were analyzed by using a X-ray fluorescent spectrometry.

As a result, the water samples in the basaltic volcanic area showed high  $Mg^{2+}$  value to compare with the seawater ratio.

Also, it was found that the  $Mg^{2+}/Ca^{2+}$  ratio of the water samples in the basaltic volcanic area and the  $Mg^{2+}/Ca^{2+}$  ratio of the rock composition are almost the same. However, cation of water samples collected near Fudeshima in Oshima had higher value of  $Mg^{2+}$  content, which seems to be related with weathering process of highly porphyritic rocks of Fudeshima volcano.

In addition, comparing the seawater composition ratio of  $SO_4^{2-}/Cl^-$  with the water sample, it was found that the water some samples from Oshima and all samples of Miyakejima contained a large amount of  $SO_4^{2-}$  originated from volcanic  $SO_2$ .

Keywords: spring water, groundwater, basaltic volcano, rhyolitic volcano, Izu Islands

# A comparative Study on Water Environment of Isolated Islands - Focusing on Islands in Nagasaki Prefecture -

\*Go Yamaki<sup>1</sup>, Koji Koder<sup>1</sup>, Asami Kazuki<sup>1</sup>, Hinako Abe


1. Hosei University Lab.Hydrogeography

**Introduction** There are many islands in Japan and each environment is unique because of its independent environment. From past research results, it is thought that land water of remote islands surrounded by the ocean is generally susceptible to sea salt influence (Goto et al. 1989), many of which are relatively small and limited. It is thought that not only human activity such as agriculture but also the influence of fallout such as rainwater tends to be reflected largely because it is a space. However, there are relatively few things concerning Tsushima, Iki, Goto Islands. In this research, we aim to clarify the present condition of the water environment by comparing the characteristics of the water quality of the land and rain water of each island.

**Research method** We conducted hydrological observations in the spring and fall seasons from 2014 to 2016. Temperature, water temperature, EC, pH, RpH were measured locally, samples were taken home, TOC measurement and main dissolved components by ion chromatography were analyzed. For rainwater, samples taken every month were analyzed in the same way.

**Results and Discussion** As a result of survey and analysis, the effects of sea salt on the land water of almost all islands are seen, the contribution of geology to sea salt is larger than that of sea salt as the overall feature of inland water in Iki, Shimoshima differed in Shimojima's water quality composition. Shimoshima has a remarkable influence of wind salt transfer, the contribution of geology to Goto Islands was seen by the area, it was clear that many nitrate was detected compared to Iki and Tsushima became. These are thought to be due to differences in geology, topography, and agricultural form.

**Keywords:** Iki Island, Tsushima Island, Goto archipelago, rainwater, water environment

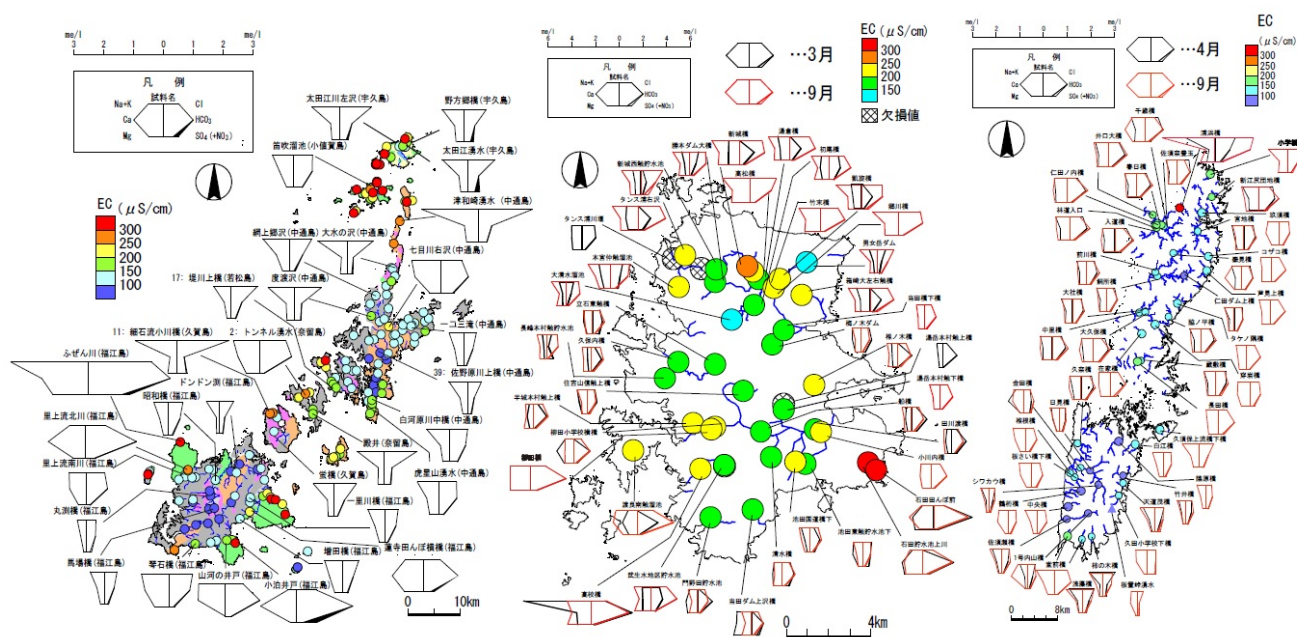


# A comparative study of the water environment around active volcano in Japan - mainly Mt.Ontake, Mt.Asama and Mt.Hakone

\*Yoshihiro IGARI<sup>1</sup>, Koji Kodera<sup>1</sup>, Kazuki ASAMI<sup>1</sup>, Masaki HORIUCHI<sup>1</sup>

1. Hosei University Lab. for hydrogeography

There are many active volcanoes in the Japanese archipelago, but factors of formation and constituents of the mountains vary depending on the volcano. In addition, due to the influence of volcanic activity, it is expected that the water quality of rivers and spring water around the volcano will also change. Therefore, we report on the results of continuous water quality survey in three volcanic areas, Mt.Ontake, Mt. Asama and Mt.Hakone where activities have been active since 2014. The electrical conductivity was generally small in the surrounding rivers around Mt.Ontake, and the values tended to be larger overall in Mt. Asama and around rivers in Hakone. Dissolved components compared In the three regions, the tendency that the EC value is small tends to show the CaHCO<sub>3</sub> type water quality composition, but the composition is different depending on the region at the point where the value is large. There are many water quality of SO<sub>4</sub> type.

Keywords: Active Volcano, Eruption, Water quality, Dissolved component, Geology

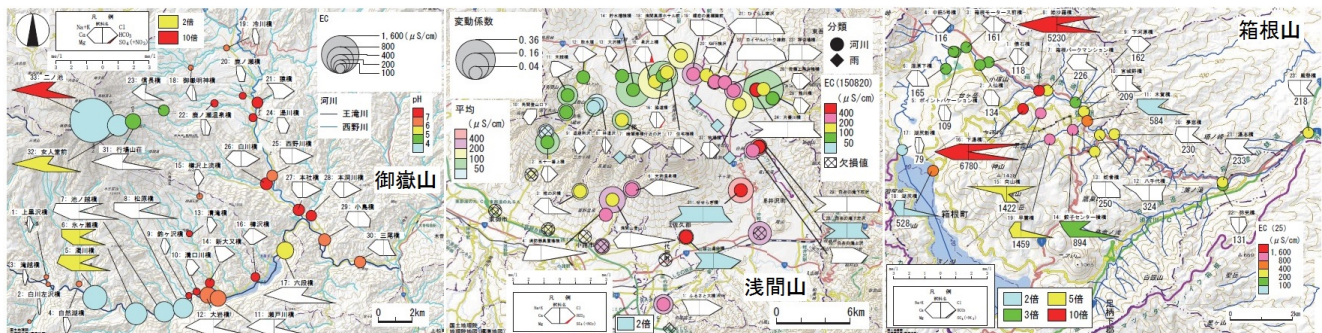

## The relationship between flow path of Beppu Onsen and S velocity distribution by microtremor array survey.

\*Yuji Miyashita<sup>1</sup>, Hideki Hamamoto<sup>2</sup>, Makoto Yamada<sup>3</sup>, Makoto Taniguchi<sup>3</sup>, Shigeki Senna<sup>4</sup>, Jun Nishijima<sup>5</sup>, Kento Naritomi<sup>7</sup>, Taketoshi Mishima<sup>6</sup>, Tomo Shibata<sup>6</sup>, Shinji Ohsawa<sup>6</sup>

1. Hot Springs Research Institute of Kanagawa Prefecture, 2. Center for Environmental Science in Saitama, 3. Research Institute for Humanity and Nature, 4. National Research Institute for Earth Science and Disaster Prevention, 5. KYUSHU UNIVERSITY, 6. Institute for Geothermal Sciences, Kyoto University, 7. KYUSHU UNIVERSITY, Graduate School

In Beppu Onsen, Osawa et al. (1994) and Osawa and Yusa (1996) have revealed the flow path of hot spring water in the southern and northern part of Beppu hot spring area. These flow paths are classified into 3 to 4 types for each spring quality, and branching and inflection are seen while overlapping in three dimensions.

In order to clarify the relationship between these flow paths and the geological structure, microtremor array survey with a radius of 0.6 m to 350 m was conducted at 105 points and the three dimensional distribution of S wave velocity was obtained

As a result, in the southern area, it is clarified that Na - Cl type hot spring flow path is obstructed in the region with high S wave velocity, which is considered to be low permeability base at 300 m below sea level ( b.s.l.), and rounds from both sides.

On the other hand, in the northern region, the Ca - Mg - HCO<sub>3</sub> type flow path was inflected to the north by hitting a region with high S - wave velocity with low water permeability at an 100 to 200m b.s.l. And at 400 to 600m b.s.l., Na - Cl type hot springs flowed down to the east part of the region with relatively high water permeability and moderate S wave velocity.

Keywords: Beppu, microtremor array survey, Flow path of Beppu Onsen

## Preliminary paleomagnetic results from the manganese wad deposit at the Niimi hot springs, Hokkaido.

\*Kazuo Kawasaki<sup>1</sup>, Hideto Suzuki<sup>2</sup>

1. Graduate School of Science and Engineering for Research, University of Toyama, 2. Faculty of Science, University of Toyama

Paleomagnetic results are reported for the manganese wad deposit at the Niimi hot springs, Hokkaido, Japan. The hot spring is located at the foot of Mt. Shyakunage in the active Niseko volcanic area. The area is covered by Quaternary pyroclastics erupted from Mt. Syakunage. The manganese wad deposit was formed from the hot spring water by biomineralization processes. The hot spring's water emerges from a local spa that closed in March 2016 and forms two small waterfalls. Paleomagnetic analysis was done on 144 manganese wad specimens that were collected from a wall surface next to one waterfall. The wad was about ~65 cm in thickness and oriented specimens were collected with 7 cc non-magnetic plastic cube at 14 levels between ~5.5 cm and ~62 cm in thickness. Alternating field step demagnetization appears to isolate either one or two stable characteristic remanent magnetization (ChRM) components. The lower coercivity component shows clustered ChRM directions at each sampling level and likely retains paleosecular variation. Conversely, the higher coercivity component shows scattered directions. When the observed ChRM directions are compared with the paleosecular variation records for Japan, the duration of the manganese wad deposition appears to have lasted at least 600 years. In other words, the regional hydrothermal system has been active for at least 600 years.

Keywords: Paleomagnetism, Manganese wad, Hydrothermal fluid