

ROFIの力学 –バルーニングに対する理論的・実験的アプローチ

Ocean dynamics of the ROFI regime –theoretical and experimental approach to the ballooning of river plumes

*磯辺 篤彦¹*Atsuhiko Isobe¹

1. 九州大学応用力学研究所

1. Research Institute for Applied Mechanics, Kyushu University

Simpson (1997) calls the coastal region where the river plume spreads a region of freshwater influence (ROFI). In strict terms, he defines the ROFI as the region where the local input of freshwater buoyancy from the coastal source is comparable with, or exceeds the seasonal input of buoyancy as heat. In the present study, we emphasize that characteristics (the horizontal scale and freshwater transport) of ROFIs are not determined by the buoyancy-driven current alone, but by a joint effect of buoyancy-driven and transient ambient currents.

River plumes induced by a coastal freshwater source have two noticeable features. One is the formation of a coastal boundary current turning to the right (in the Northern Hemisphere) from the viewpoint of an observer at the river mouth looking seaward. Another noticeable feature of river plumes is the formation of an anticyclonic eddy (hereinafter referred to as the bulge) in front of the river mouth. It is well known that a bulge growing offshore (ballooning) hardly reaches a steady state in the absence of either ambient currents or wind forcing. This study provides a physical interpretation for the ballooning of river-plume bulges by conducting numerical experiments in which a river plume is induced by a coastal freshwater source. Part of the freshwater released to the model ocean undergoes inertial instability. Near-inertial oscillations are predominant when disturbances are not forced in ambient waters of the river plume. These isotropic disturbances are amplified by inertial instability, so that unstabilized freshwater can move in arbitrary directions. Thus, unstabilized freshwater does not need to move toward the coastal boundary current on the right-hand side of the river mouth. Freshwater unstabilized for a long time can stay in the bulge for a long time. Unstabilized freshwater accumulates gradually in the bulge, and so ballooning occurs. When the direction of disturbances is prescribed in ambient waters, unstabilized freshwater is forced to move in the same direction. Thereby, motion of unstabilized freshwater is restricted in the alongshore direction when background disturbances are induced by alongshore tidal currents. It is therefore concluded that tidal currents play a role in stabilizing the offshore growth of river-plume bulges in coastal and shelf waters.

In addition, the above argument provides us a possibility that the ballooning is potentially controlled by the curvature of the river-mouth sidewall. This is because the riverine water firstly moves along the sidewall on the rotating frame, and because the curvature affects the centrifugal force (hence, inertial instability) exerted on riverine water. In the present study, we will demonstrate the dependency of river-plume behavior on the curvature (geometry of river mouths) through a rotating tank and numerical experiments. Exploring non-linear and unsteady river plumes is a major frontline of ocean dynamics even at the present time, although the river plume is the oceanic process nearest to the everyday life.

キーワード : 河川プリューム、バルーニング

Keywords: river plume, ballooning

Tsunami Simulation along Kitakami River with Effects of Morphological Changes and Breaching of River Embankments

*三戸部 佑太¹、青山 恭尚¹、田中 仁¹、小森 大輔¹

*Yuta Mitobe¹, Yasuhisa Aoyama¹, Hitoshi Tanaka¹, Daisuke Komori¹

1. 東北大学

1. Tohoku University

The 2011 Great East Japan Earthquake Tsunami induced huge damages on Pacific Coast of Japan. The rapid and farther run-up of the tsunami along rivers extended the damaged area to the area farther from the coast. Although there have been many researches on numerical simulation of tsunami run-up into rivers, due to its huge scale the 2011 tsunami has some features which have not been considered well before this event. One of the biggest differences is big morphological changes especially around river mouths. Sand spits at the river mouths were flushed by the tsunami and also erosion of river mouth terraces was observed. Morphology of river mouths has been considered as one of the important factors to limit the volume of the tsunami flow running into the rivers. Another important feature is the tsunami wave height more than heights of river embankments. The tsunami overflow flushed the river embankments completely in many areas. These phenomena themselves are important problems which should be considered well, and their effects on the tsunami waves running up along the rivers also should be included in numerical models for the proper designs of hard and soft countermeasures. In this study, numerical simulations with different numerical conditions were done to discuss the effects of morphological changes and collapse of river embankments on their propagation along rivers.



In this study, propagation of the 2011 tsunami into Kitakami River, located in Miyagi Prefecture, Japan, was simulated with Shallow Water Equation (SWE) model, which is horizontal 2D model and commonly used for tsunami simulation. A sand spit at the river mouth was flushed and a part of river embankment along this river was broken by the 2011 tsunami. Many water level stations were damaged by the earthquake and the tsunami, while one station survived and recorded the time series of the water level during this event with 1 min of sampling rate. Input wave condition of water level and velocity was calculated in advance through a simulation from the wave source to the numerical domain. In order to include the interaction between the tsunami intrusion into the river and the morphological changes around the river mouth, a sediment transport model proposed by Takahashi et al. (1999) was coupled with SWE model. The river and coastal embankments were included in the bathymetry data. Only in the area where actually the embankments were flushed by the tsunami, they were considered as a part of the movable bed, and no morphological changes were calculated in the other part of the embankments to keep their height. The result of the movable bed simulation was compared with real observed water level data at Fukuchi Station and the simulated data with fixed bed to have no erosion of the embankments and the river mouth sand spit.

In the movable bed simulation, the embankments were rapidly eroded by the strong flow over them. The peak of the water level at the Fukuchi Station shows overestimate by about 1 m in the fixed bed simulation, while the peak with the movable bed shows good agreement with the observed data. However, the decrease of the water level after the first peak was smaller in the both simulation cases. In the movable bed case, the erosion around the river mouth was not as big as the real condition, no flushing of the spit was observed in the simulation. And there is also an uncertain point on the time when the collapse of the embankment happened in the real tsunami. More discussion should be done on sediment

transport model and embankment collapse model under tsunami waves to improve the accuracy of simulation of tsunami run-up into rivers.

キーワード：浅水流方程式、津波河川遡上、土砂輸送モデル

Keywords: Shallow Water Equation, Tsunami run-up into river, sediment transport model

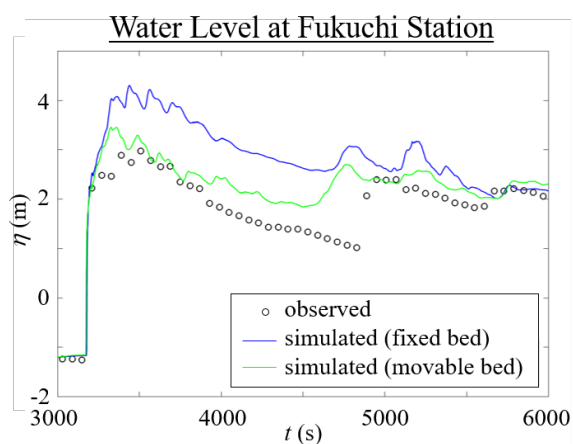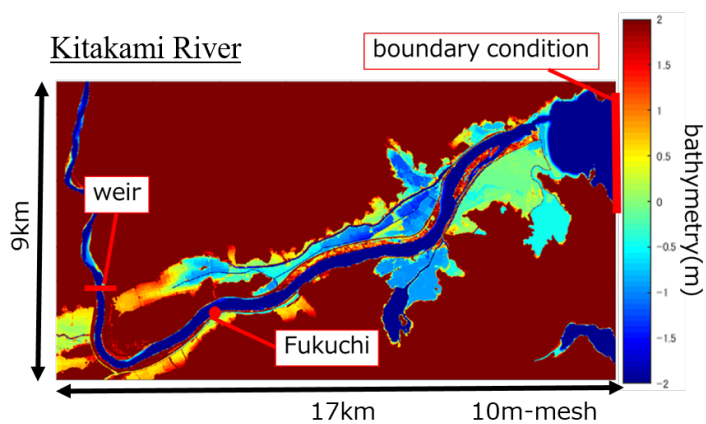

Effects of suspended sediment matters induced by high riverine discharge on coastal mixing: a model simulation

*干場 康博¹、松村 義正²、羽角 博康¹、伊藤 幸彦¹、山下 洋³

*Yasuhiro Hoshihara¹, Yoshimasa Matsumura², Hiroyasu Hasumi¹, Sachihiko Itoh¹, Yoh Yamashita³

1. 東京大学大気海洋研究所、2. 北海道大学低温科学研究所、3. 京都大学フィールド科学教育研究センター

1. Atmosphere and Ocean Research Institute, The University of Tokyo, 2. Institute of Low Temperature Science, Hokkaido University, 3. Field Science Education and Research Center, Kyoto University

Rivers transport fresh water, suspended sediment matters (SSMs) and nutrients from land to coastal seas where biological productivity is high. Rivers directly supply dissolved inorganic nutrients to coastal areas. On the other hand, riverine buoyant freshwater inputs induce horizontal river plumes and vertical circulations which indirectly supply nutrients from the deeper nutrient-rich layer to the surface layer. The form and strength of horizontal river plumes and vertical circulations (e.g., estuary circulation) depend on the density difference between river water and seawater. SSMs are not just passively transported to coastal seas by such plumes and circulations but also change them by influencing the density of river water and seawater, as seen in the case of hypopycnal flows. The change of coastal mixing driven by the plumes and circulations due to the density-change by SSMs is expected to be important for coastal biogeochemistry, especially when a lot of SSMs are supplied to the sea, that is, huge flooding. However, the interaction between the physical (i.e., horizontal plumes and vertical circulations) and the biogeochemical (i.e., SSMs) processes has not been quantitatively discussed. In this study, we employ a non-hydrostatic ocean model (kinaco) with Lagrangian particles, which represent SSMs and affect the density of seawater, in order to estimate the mixing effect by SSMs. We used experimental settings of a realistic topography of Tango Bay, Japan during the flooding in Sep. 2013. Tango Bay is a region of freshwater influence by Yura River where extraordinary river-discharge was observed in Sep. 2013. We especially focus on influenced vertical mixing due to upwellings and downwellings accompanied by sinking of SSM-particles near the coast, and investigate the sensitivities of physical processes to density of SSM-particles, etc.

キーワード：洪水時、河川起源懸濁物、物理・物質循環相互作用

Keywords: Flood, Suspended sediment matter, Interaction between physical and biogeochemical processes

静止海色衛星による河川プリュームの高時空間分解能観測 High-resolution observation of a river plume by using the geostationary ocean color satellite

*中田 聡史¹、小林 志保²、石坂 丞二³、林 正能⁴、淵 真輝¹、中嶋 昌紀⁵、秋山 諭⁵

*Satoshi Nakada¹, Shiho Kobayashi², Joji Ishizaka³, Masataka Hayashi⁴, Masaki Fuchi¹, Masaki Nakajima⁵, Satoshi Akiyama⁵


1. 神戸大学海事科学研究科、2. 京都大学フィールド科学教育研究センター、3. 名古屋大学宇宙地球環境研究所、4. 名古屋大学大学院環境学研究科、5. 大阪府立環境農林水産総合研究所

1. Graduate School of Maritime Sciences, Kobe University, 2. Field Science Education and Research Center, Kyoto University, 3. Institute for Space-Earth Environmental Research, Nagoya University, 4. Graduate School of Environmental Studies, Nagoya University, 5. Research Institute of Environment, Agriculture and Fisheries, Osaka Prefecture

河川プリュームの指標となる海表面塩分(SSS)の情報は、沿岸域の水環境のみならず養殖漁場環境の観点から重要である。しかし、沿岸域においては衛星観測から得られるSSSデータの水平分解能は粗く(例えばSAC-D衛星は約50 km)、沿岸域に特化した塩分場推定手法を確立する必要がある。低塩な河川プリュームは陸域由来の有色溶存有機物(CDOM)を多く含み、CDOMと塩分には高い相関関係があることが知られている。2011年より、静止海色衛星GOCI-COMSによって1日8回毎時のCDOMマップが高い水平解像度(500 m)で得られている。本研究では、現場海洋観測結果に基づいて衛星観測により得られたCDOMマップから海表面塩分を推定する方法を開発し、沿岸域における海表面塩分マップを整備した。河川からの陸水負荷が大きく、現場観測データが豊富である大阪湾・播磨灘・紀伊水道を実験対象として、主に台風襲来前後における河川プリュームの動態を解析した。河川出水が卓越する夏季から秋季にかけて対象海域において現場観測を実施した結果、衛星CDOMと現場CDOMデータとの良好な回帰式が得られ(相関係数は0.88)、また、CDOMとSSSには良好な負の相関関係(相関係数は-0.92)が見出された。衛星CDOMからSSSの推定式が作成され、衛星CDOMデータからSSSマップが作成できた。解析結果の一例として、2015年7月3日に発生した台風11号の近畿地方上陸前(7月15日)と後(7月24日)において変化した海表面塩分を、淀川流域降水量と河川流量の時系列とともに図1に示す。台風上陸後に降雨と淀川の出水が多くなった後、大阪湾奥に形成されていた河川プリュームが沖側に張り出し、ほぼ大阪湾東部全体に広がっていた。播磨灘の沿岸域に注目すると、沿岸に張り付いていたプリュームが台風上陸後に沖側へ数km張り出した。淡路島の集水域の狭い河川からの出水のため、沿岸に張り付く河川プリュームは幅が狭い。7月15日において紀伊水道に貫入していた高塩な黒潮水塊が、7月20日は河川出水により低塩化していた。このように、海色衛星を用いて海表面塩分マップを得ることで、河川プリュームの特徴を定性的かつ定量的に捉えることができる。整備されたSSSマッププロダクトは、すでに沿岸域における高解像度海洋シミュレーションの初期値や検証データとして利用され始めており、津波、高潮、急潮などの防災面や、赤潮や陸水由来栄養塩の分布などの水環境面研究の基礎データとなりえる。

キーワード：有色溶存有機物、海面塩分、河川プリューム、沿岸域、静止海色衛星

Keywords: Colored dissolved organic matter, Sea surface salinity, River plume, Coastal oceans, Geostationary ocean color satellite

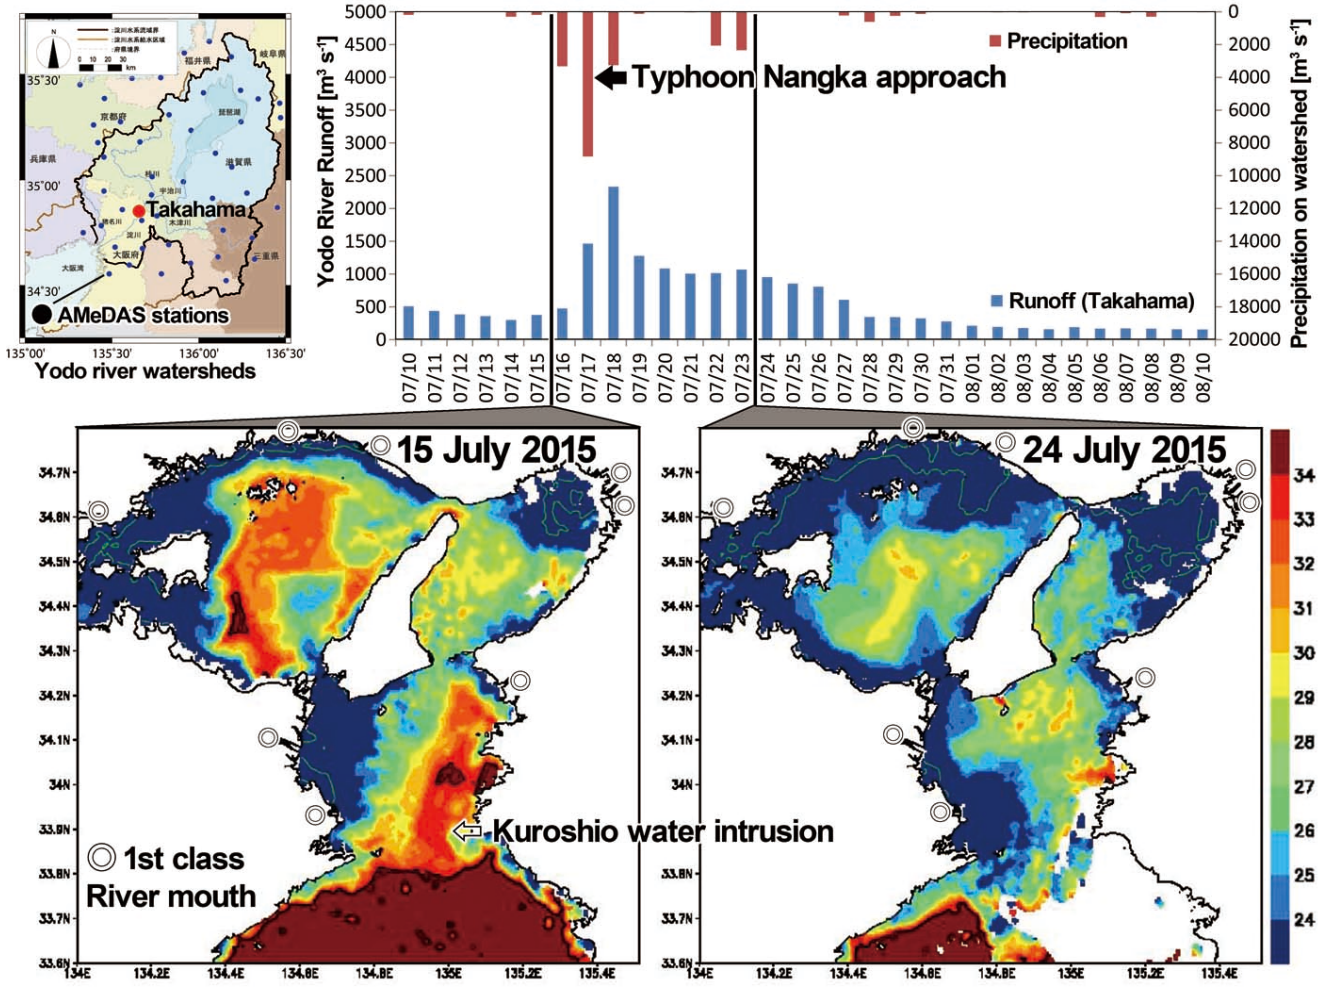

次世代衛星高度計をデータ同化する全球河川流量推定フレームワークの開発

A development of global-scale river discharge estimation framework by assimilating satellite altimetry

*池嶋 大樹¹、山崎 大²、鼎 信次郎¹

*Daiki Ikeshima¹, Dai Yamazaki², Shinjiro Kanae¹

1. 東京工業大学、2. 海洋研究開発機構

1. Tokyo Institute of Technology, 2. Japan Agency for Marine-Earth Science and Technology

地表水の時空間的変動を全球スケールで把握することは、内陸水域・海洋問わず地球全体の水循環解明や水資源管理に重要である。河川流量は陸域水動態における最も重要な要素の一つであり、その高精度な推定が望まれている。河川流量の計測は旧来より河川に設置した流量計によって行われてきたが、国や地域によってその数や分布には違いがある。また、情報公開の度合いも異なっており、全球で空間的に均一なデータを収集することは困難であった。2021年に打ち上げが予定されている次世代衛星高度計SWOT (Surface Water and Ocean Topography) は、レーダー干渉計を用いて100m未満の解像度で地表水の水面標高を面的に観測できる初めての人工衛星であり、全球規模で地表水動態の詳細を捉えることが期待される。しかし、SWOT衛星は同一地点を5~21日に一度しか観測できないため、SWOT観測の水面標高のみから時間的に連続して高精度な河川流量を推定することは困難である。空間的だけでなく時間的にも連続な流量推定の実現を目指し、SWOT観測と河川モデルを組み合わせて流量を推定するデータ同化手法の適用が検討されている。既往研究では計算コスト等の制約から特定の地域や河川に限定した同化が行われていたが、本研究ではSWOTの性能を最大限活かすために全球スケールでのデータ同化フレームワークを初めて開発した。河川モデルとしてCaMa-Floodを用いたことで、高速かつ高精度な流量推定が可能となっただけでなく、SWOT衛星の観測する水面標高を直接同化することが可能となった。また、データ同化手法としてはアンサンブルカルマンフィルタ (EnKF) の派生形であるLETKF (局所アンサンブル変換カルマンフィルタ) を採用し、河川モデルという非線形モデルに対しても現実的な計算コストで全球における同化が可能となった。2021年に予定されているSWOTの打ち上げ前にデータ同化手法の有効性を検証するため、ここでは開発したデータ同化フレームワークに対し、仮想観測を用いた仮想実験を行なった。これは、意図的に乱した河川モデルのシミュレーション結果に対して、河川モデルを用いて作成した仮想観測を同化することで河川流量の再現性を向上させられるかを試した実験である。実験の結果、大陸河川のような大規模河川において精度の向上が見られた。特に、河川の下流においてはその地点で観測のない日についても河川流量を小さい誤差で推定することができた。これは上流の多くの支流で観測・同化された流量が河川を流下し、下流の流量改善に貢献しているからである。また、降水量データ、あるいはそれより計算される局所的なグリッド内からの陸面流出量データが現実的でない場合でも、河口付近では高精度な流量推定する事が可能であることもわかった。本研究の結果より、全球スケールで時空間的に連続な河川流量推定における将来のSWOT観測の有効性が示唆された。

キーワード：データ同化、SWOT、局所アンサンブル変換カルマンフィルタ、河川流量、衛星高度計

Keywords: data assimilation, SWOT, LETKF, river discharge, satellite altimetry

Tidally-induced instability processes governing the river plume behavior in a non-rotating regime

*岩中 祐一¹、磯辺 篤彦²

*Yuichi Iwanaka¹, Atsuhiko Isobe²

1. 九州大学、2. 九州大学応力研

1. Kyushu University, 2. RIAM, Kyushu University

River plumes play a significant role on the ecosystem as well as the ocean circulation in coastal waters, because they include terrigenous nutrients, sediments, and pollutants in addition to the buoyancy, and thus behavior of river plumes has been an important topic in the coastal oceanography. Recently, an attention has been placed on river plumes fluctuating owing to tidal currents near the river mouth (tidal plume). However, previous numerical studies on the river-plume dynamics have been almost conducted under the hydrostatic assumption, and so it was difficult to investigate how fine structures such as Kelvin-Helmholtz (K-H) bellows observed at the base of tidal plumes alters behavior of river plumes. This is the objective of the present study reproducing the fine structures in tidal plumes using a non-hydrostatic numerical model (MITgcm with 5-m grid cell). First, two sets of field observations were conducted around the Hiji River mouth, the Seto Inland Sea, Japan on July 1st, 2013. One is the CTD casts to depict a vertical section of the river plume, and the other is an aerial photography using a ship-towed balloon equipped with a digital camera to depict a horizontal view of the river plume. The estuarine front visualized by accumulated debris and foams was accompanied by a meander with a wavelength of a few ten meters. The river plume with a thickness of a few meters had the undulated plume owing to the development of small eddies horizontal length less than ~100 m. Numerical experiments were conducted to reproduce the river plume fluctuating owing to the tidal currents, and to investigate the effect of fine structures to the behavior of the river plume. It is confirmed that the horizontal and vertical disturbances observed in the field observations were likely to occur due to the inertial instability and K-H instability, respectively. It is indicated that these disturbances are generated by a combination between river plume and ambient tidal currents, act as friction to prevent for the river plume from expanding offshore-ward.

キーワード：河川プリューム、慣性不安定、ケルビン・ヘルムホルツ不安定

Keywords: river plume, inertial instability, Kelvin-Helmholtz instability

全球河川氾濫モデルへの海面水位変動過程の組み込みとその影響評価 Incorporation of sea level variation into a global river routing model and its impact assessment

池内 寛明¹、平林 由希子¹、*山崎 大²

Hiroaki Ikeuchi¹, Yukiko Hirabayashi¹, *Dai Yamazaki²

1. 東京大学大学院工学系研究科、2. 海洋研究開発機構

1. Graduate School of Engineering, the University of Tokyo, 2. Japan Agency for Marine-Earth Science and Technology

全球河川氾濫モデルは、地形データや観測データの乏しい地域での河川洪水リスク評価や地球全体での氾濫域マッピングとその地域間比較などに応用され、近年世界の各研究機関で開発されている。しかしながら、それらは主に陸域での洪水リスク評価に焦点が当てられているため、海面水位変動過程は考慮されておらず、例えば潮汐や高潮に脆弱な地域での洪水氾濫の再現が過小評価されるという点が課題だった。

本研究では、背水効果を適切に表現できる全球河川モデルと、近年開発された全球潮汐高潮再解析データを持ちいることによって、海面水位変動が河川洪水氾濫に及ぼす影響を解明することを目的とした。まず、全球河川モデル内において海面水位変動を表現するためのモデルの改良を行った。次に、潮汐高潮再解析データと全球河川モデルの間で海面水位データを受け渡すためのスキームの開発を行い結合実験を行うとともに、その影響を評価した。

全球規模での結合実験の結果、海面水位変動を考慮しない場合と比べて河川水位が0.5 m以上増大する地点が多くあり、河川氾濫に対し海面水位変動が有意に影響を及ぼすことが分かった。その中でも特に影響の大きかったアジア域の集水面積が160,000 km²以上の大河川を対象として、河川水位の時系列変化を分析した結果、ピーク水位が1m以上増加したり、河川水位の季節変動がより強化されたりするなど、大きなインパクトをもつことが明らかになった。

キーワード：河川洪水、高潮災害、全球河川氾濫モデル、全球潮汐高潮再解析

Keywords: Fluvial flooding, Storm surge, Global river routing model, Global reanalysis of tide and surge

地下水を經由したリン酸塩の海域への輸送がサンゴの生息環境に及ぼす影響

Phosphorus in groundwater discharge to the ocean –A potential source for coral reef degradation

*安元 純¹、野崎 真司²、安元 剛³、廣瀬 美奈⁴、飯島 真理子³

*Jun Yasumoto¹, Masashi Nozaki², Ko Yasumoto³, Mina Yasumoto Hirose⁴, Mariko Iijima³

1. 琉球大学 農学部 地域農業工学科、2. 琉球大学大学院 農学研究科、3. 北里大学 海洋生命科学部、4. 一般社団法人 トロピカルテクノプラス

1. Faculty of Agriculture, University of the Ryukyus, 2. Graduate School of Agriculture, University of the Ryukyus, 3. School of Marine Bioscience, Kitasato University, 4. Tropical Technology Plus

Phosphorus, the main ingredient of fertilizer, is a limiting factor for sustainable primary production and is recognized as a major source for eutrophication of lakes, estuaries, and watersheds. Phosphorus in the water environment exists in various forms, and its transport form have been remained in many regions. Many sequential extraction methods have been proposed for morphological fractionation of phosphate in soil, but there are problems such as not being usable for morphological classification of polyphosphate and organic phosphorus. However, in recent years, One-dimensional (1D) solution ³¹P nuclear magnetic resonance spectroscopy (NMR) is currently the tool of choice for molecular-level characterization of organic P in soils ³¹P nuclear magnetic resonance spectroscopy (³¹P-NMR) as a morphological separation method of phosphorus in soil in fields such as soil fertilizer has been conducted. In this method, it is possible to classify phosphate in a form which was difficult to classify by the continuous extraction method.

In the present study, ³¹P-NMR and Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP-AES) are used to understand a characteristic of the transport form of phosphate in soil and groundwater. In addition, we estimated the phosphorus load through groundwater to the coral reefs sea region of Okinawa through field measurement and numerical simulations, and investigated the effect of phosphate on in vivo skeleton formation of primary polyp for hard coral *Acropora digitifera*.

キーワード：リン、³¹P核磁気共鳴装置、地下水、サンゴ

Keywords: Phosphorus, ³¹P nuclear magnetic resonance spectroscopy, groundwater, coral reefs

Hydro-Debris2Dモデルの山岳流域土砂生産予測への応用

Application of Hydro-debris2D into sediment yield prediction from mountain watershed

*山敷 庸亮¹、黒木 竜介¹、大泉 伝²

*Yosuke Yamashiki¹, Ryusuke Kuroki¹, Tsutao OIZUMI²

1. 京都大学大学院総合生存学館、2. 海洋研究開発機構

1. Global Water Resources Assessment Laboratory - Yamashiki Laboratory Graduate School of Advanced Integrated Studies in Human Survivability Kyoto University, 2. Japan Agency for Marine-Earth Science and Technology

水文土石流モデル(Hydro-debris2D)の阿蘇山を含む白川流域への応用を行なった。水文土石流モデルは、浅水流方程式による表面流モジュールと、速い中間流モジュールに、土石流・土砂輸送モジュールを融合させたモデルであり、本モデルを用いて広島や伊豆大島の土石流災害の再現を行なっている。昨年度より阿蘇山の斜面崩壊予測を行なったが、実際の状況より崩壊が過大評価となった。その原因は、パラメータに広島での土石流災害のものを用いたためであり、土壌情報を反映したモデルパラメータの改良が必要である。土砂生産量については、下流域の土地利用状況を鑑みると、森林による被覆の土砂生産への影響が大きくなっており、これについても推定値が必要となる。

キーワード：水文土石流モデル、土砂輸送、山岳流域

Keywords: Hydro-debris2D, sediment transport, mountain watershed

次世代衛星高度計ミッション「SWOT」の紹介

Introduction of the SWOT satellite altimetry mission

*山崎 大¹、Pavelsky Tamlin²

*Dai Yamazaki¹, Pavelsky Tamlin²

1. 海洋研究開発機構、2. University of North Carolina

1. JAMSTEC - Japan Agency for Marine-Earth Science and Technology, 2. University of North Carolina

SWOT (Surface Water and Ocean Topography)は、米国NASAとフランスCNESが2021年に打上げを予定している次世代衛星高度計ミッションであり、海域および陸域の水面標高の詳細な時空間分布の計測を目的としている。Envisat RA2・Cryosat・Jason 1/2などの既往の衛星レーダー高度計は機体直下の水面標高をレーダーパルスで観測する「Nadir Altimeter」であったが、SWOTでは合成開口レーダー干渉計を用いて水面標高を高解像度で2次元的に計測する「Swath Altimeter」である。SWOT衛星は高度約890km太陽非同期の約21日周期軌道で、北緯78度～南緯78度を観測範囲とする。観測幅(Swath width)は衛星軌道直下の約120kmで、観測範囲内の陸域と海域をほぼ欠損域なくカバーする。陸域においては河川や湖沼など小さな水体を捉えるため100m未満の高解像度で観測を行い、海域においては黒潮などの中規模渦を主要なターゲットとして約500m解像度で観測を行う。

とりわけ陸域に関しては、海洋と比較して河川や湖沼などの水体は空間スケールが非常に小さいため、SWOTによる高解像度の水面標高観測は地表水動態の理解を劇的に進めることが期待されている。幅100m以上の河川と面積5ha以上の湖沼湿地を鉛直誤差10cm未満で観測することで、地表水の空間分布および貯留量の時間変化の推定を目指す。また、直接的な河川水位の観測に加えて、水面勾配も導出できるため、衛星観測からの河川流量の推定も計画されている。SWOTによる観測は、補助的な地形データやモデルと組み合わせることによって、湖沼や貯水池の水量変化、洪水と渇水の発生、湿地や氾濫原の水動態などの、地球規模での解明を進めると期待される。

2021年の打上げに向けて、機体や観測機器の開発だけでなく、観測誤差の推定、アルゴリズム開発、補助的なデータ・モデルの準備が精力的に進められている。本発表では、SWOTミッションの概要について、主に発表者が関わっている水文研究に着目して俯瞰的に紹介する。

キーワード：SWOT、衛星高度計、地表水、海面高度

Keywords: SWOT, Satellite Altimetry, Surface Water, Sea Surface Height

A particle-in-cell modeling framework for simulating riverine and oceanic suspended sediment transport

*松村 義正¹

*Yoshimasa Matsumura¹

1. 北海道大学低温科学研究所

1. Institute of Low Temperature Science, Hokkaido University

Suspended sediments contained in the river water (and glacial melt water) runoff is one of the primary source for the terrigenous trace elements supply to the ocean and hence it plays an important role in the marine material circulation and biogeochemical cycle. The transport, settling and re-suspension processes of sediment particles in the ocean are controlled by the interaction between the dynamics of individual particles depending on its composition and size-distribution and the complex current systems in the coastal regions. In particular, the suspended sediment concentration at the greater discharge events is several orders of magnitude greater than that in the normal time runoff. In such cases the existence of suspended sediments increases the apparent density of turbid runoff water, and thereby dynamically affects the current structure. In numerical ocean models, the suspended materials have been usually represented by the cell-volume averaged concentration in the Eulerian form as well as salinity and other dissolved materials. However, individual particle is settling with its own settling velocity relative to the ocean current primarily determined by its size and composition. Therefore, the bulk representation of Eulerian cell-averaged concentration has limitations to trace wider range of sediment size-distribution. To address this issue, we introduce a new particle-in-cell (PIC) type modeling framework to simulate oceanic dispersed multiphase flow such as the turbid river water discharge, where the dispersed suspended materials are represented by large number of Lagrangian particles. In the present model Lagrangian particles are solved at each time-step simultaneously with the time progress of the ocean current predicted by a finite-volume non-hydrostatic ocean model. The dynamical effects of the suspended particles are included by appending the sum of the contribution of particles existing inside each cell to the right hand side of the Navier-Stokes equation that predict the velocity at corresponding cell. In the presentation we introduce the detail of the implementation and the result of an idealized experiment on the formation of hyperpycnal flow.

キーワード：堆積物輸送、ラグランジアン粒子追跡、非静力学海洋モデル、ハイパーピクナル流

Keywords: sediment transport, Lagrangian particle tracking, non-hydrostatic ocean model, hyperpycnal flow

The dynamics of the freshwater discharge at the Ganges-Brahmaputra river mouth

*木田 新一郎¹

*Shinichiro Kida¹

1. 九州大学・応用力学研究所

1. Research Institute for Applied Mechanics, Kyushu University

The Bay of Bengal receives significant freshwater input from the Ganges-Brahmaputra river. This freshwater discharge is observed with a prominent seasonal cycle, a minimum in late winter to early spring and a maximum in late summer to early fall. However, the river mouth of the Ganges-Brahmaputra river is a mega-delta and thus has multiple channels rather than just one. We have carried out regional numerical experiments utilizing a land-river-ocean seamless model to investigate the basic dynamics of how this river discharge events near the river mouth occur. On a large-scale, we find freshwater discharge to create river plumes along the coast and to establish a coastal current that flows southwestward when the oceanic currents are assumed quiescent. On a river mouth scale, however, the pathways of the freshwater discharge is complex. Preliminary analysis indicates that this is because of river-ocean interaction and that the various channels of the Ganges-Brahmaputra river delta are dynamically connected.