

S-net project: Deployment and its seismic and tsunami observation system

*Kenji Uehira¹, Masashi Mochizuki¹, Toshihiko Kanazawa¹, Takashi Shimbo¹, Katsuhiko Shiomi¹, Takashi Kunugi¹, Shin Aoi¹, Takumi Matsumoto¹, Shoji Sekiguchi¹, Narumi Takahashi¹, Naotaka YAMAMOTO¹, Masanao Shinohara², Tomoaki Yamada²

1. National Research Institute for Earth Science and Disaster Resilience, 2. Earthquake Research Institute, University of Tokyo

Seafloor Observation Network for Earthquakes and Tsunamis along the Japan Trench (S-net) has 150 real-time monitoring observatories that cover the area about 1000km x 300 km from off-Hokkaido to off-Kanto. It is expected that early tsunami and earthquake warnings and earthquake researches will be enhanced. S-net consists of six segment networks of about 25 observatories and 800 km fiber optic cable (1,500 km fiber optic cable for the Japan Trench outer rise segment network). Each observatory has four sets of three-component seismometers for earthquake observation and two sets of pressure gauge for tsunami observation. Fiber-optic cable connects to landing station, and the data is transmitted from landing station to the data center via IP-VPN network.

S-net project has started in 2011. We have already finished deployment of all of the observatories and fiber-optic cables in 2016. Observatories and cables are installed by cable ship which conducts laying and installation of submarine fiber optic communication cables. We carried out installation by C/S Subaru (9,557 ton), C/S KDDI Pacific Link (7,960 ton), and C/S SEGERO (8,323 ton). In order to avoid influence of with fishery activity (for example, the trawling with using otter board), we buried the cables and observatories one meter or deeper below the seabed in the sea area where water depth is shallower than 1,500 meters using the plough and/or ROV (Remotely Operated Vehicle).

We have also constructed five landing stations; Minamiboso station in Minamiboso City, Chiba Pref., Kashima station in Kashima City, Ibaraki Pref., Watari station in Watari Town, Miyagi Pref., Miyako station in Miyako City, Iwate Pref., and Hachinohe station in Hachinohe City, Aomori Pref.. The Watari station is located on the third floor of reinforced concrete building, and other stations are container-type data centers. The S-net (except outer-rise segment) started to operate in May 2016, and the pressure gauge and accelerometer data have been transmit to Japan Metrological Agency (JMA) for monitoring purpose. The S-net detected many earthquakes. S-net also observed tsunamis like with the earthquake of the November 22, 2016 off Fukushima (M7.4).

Keywords: S-net

Offshore tsunami observation array suitable for coastal tsunami prediction using multiple linear regression with L1 regularization

*Junichi Taniguchi¹, Takashi Yoshikawa², Shin Murata², Yasuhiko Murata², Takane Hori³, Masato Okada², Toshitaka Baba¹

1. Tokushima University, 2. Tokyo University, 3. JAMSTEC

In recent years, tsunami prediction methods using the offshore tsunami data are investigated while high-density offshore tsunami observation networks have been deployed around Japan. We proposed methods to predict the coastal tsunami height by regression from offshore tsunami heights in the previous studies (Baba et al., 2014; Igarashi et al. 2016). These aimed to utilize the tsunami data observed by previously installed offshore gauges to improve the accuracy of tsunami prediction at the coast as possible. On the other hand, considering a development of a similar system including construction of a new offshore observation network in other area, we have to answer a question where we should install observation points to make the prediction accuracy the best. Therefore, in this study, the importance of each offshore observation point was evaluated by introducing L1 regularization term (LASSO) in the regression analysis. This study was carried out by the following procedure. We assumed 2622 rectangular fault models in total in the Nankai trough subduction zone. Uniform sliding was assigned for 1506 models. The remaining 1116 models have heterogeneity of slip distribution by assuming a large slip patch on the fault plane. The tsunamis caused by the 2622 fault models were repeatedly calculated by solving the nonlinear long wave theory. We performed a multiple linear regression analysis with L1 regularization term to the maximum tsunami heights at a point in the Asakawa bay, Tokushima, and these recorded at the 57 offshore points of GPS wave meters and the DONET water pressure gauges. The analysis showed that it is possible to predict the coastal tsunami height with the accuracy of RMS residual less than 1 m by using only 12 offshore points which are located in the Kii Channel between the Cape Shiono and the Cape Muroto.

Keywords: tsunami prediction, offshore observation, L1 regularization term

Countermeasures against various types of tsunami earthquakes

*Akio Katsumata¹, Kenji Nakata¹, Kenichi Fujita¹, Masayuki Tanaka¹, Koji Tamaribuchi¹, Fuyuki Hirose¹, Akio Kobayashi¹

1. Meteorological Research Institute, Japan Meteorological Agency

Tsunami earthquakes are those which generate tsunami greater than that expected from its magnitude determined from seismic amplitude. It is considered that there are two types of tsunami earthquake. One is a slow earthquake, in which radiation of short period seismic wave is relatively small. In those earthquake, the slip is usually small compared with its fault size. It is considered that tsunami generation is not different very much from that expected from the moment magnitude in those slow earthquakes. On the other hand, the amplitude of seismic wave is smaller than those of regular earthquakes of the same moment magnitude. Since conventional magnitudes based on seismic wave amplitude are often used for the first tsunami warning to be issued within three minutes after occurrence of the earthquake, the first tsunami warning may underestimate the tsunami height for slow earthquakes. Not to underestimate the tsunami height even for slow earthquakes, magnitude determination with more longer seismic wave or integrated displacement such as Mwp would be effective. Mwp is determined from teleseismic data. Other methods should be developed to determine appropriate magnitude from local seismic data of slow earthquakes.

On the other hand, there is another type of tsunami source such as submarine land slide or collapse of volcanoes. In 1792, Mt Mayuyama collapsed, and its volcanic debris avalanche caused high tsunami. Prediction of the collapse would be very difficult. However, it is possible to estimate the tsunami height and affected areas before the event by introducing some assumptions. In 1998, very high tsunami estimated to be caused by a submarine landslide attacked the shore of Papua New Guinea. We investigated the possibility of landslide detection by seismic waves, and got negative conclusions. Offshore tsunami gauges are considered to be effective countermeasure for such submarine landslides. Tsunami radar and microbarogram may be effective to detect offshore tsunami in addition to the GPS wave gauge and the submarine tsunami gauge.

Keywords: tsunami earthquake, slow earthquake, submarine landslide, volcanic debris avalanche

Retrieval of tsunamis by the interferometry of deep ocean pressure records

*Shingo Watada¹, Lisa Kaneko², Yuchen Wang¹, Kenji Satake¹

1. Earthquake Research Institute, University of Tokyo, 2. Department of Earth and Planetary Science, University of Tokyo

Over the last 10 years, seismic waveform interferometry became a popular technique for studies of earth's subsurface. It enables to retrieve virtual seismic waveforms propagating between two stations without earthquake sources by stacking of the cross-correlation of continuous records of ground motions. We applied waveform interferometry to the records from deep ocean pressure gauges to retrieve tsunami waveforms without tsunamis sources.

Continuous pressure records for the year 2011-2015 from three DART stations (21418, 21413, 52401), located along the western boundary of the Pacific at the depth of 5500-5900 m were used for the tsunami interferometry. Distance between stations ranges from 956 to 2265 km. De-tided data in a common four or eight hour-long data window were pre-processed: removal of the long-period trend by 6th-order polynomial fit, time domain one-bit amplitude normalization, and frequency domain amplitude spectrum whitening. Cross-correlated waveforms of multiple time windows with a half timewindow overlap for three years were stacked. The stacked waveforms showed gradual amplitude increase toward the arrival time of virtual tsunami propagating between two stations. A sharp transition from positive to negative amplitude was observed at the expected arrival time.

This characteristic waveform reflects the fact that the long-wave tsunami at the deep ocean is nearly non-dispersive for a broad wave-period range. In theory the cross-correlation of 2D isotropic non-dispersive wavefield coming from large distance shows gradual increase of amplitude before the expected arrival time of the virtual waves traveling between two points because; the time lag of an incoming plane wave to the two points with a slant angle is less than the traveltime between the two points, and interference of plane waves coming from all azimuth will result in the maximum amplitude of the cross-correlation in the azimuth connecting two points. No plane wave arrives at two points with a time lag larger than the traveltime between the two points, corresponding to the abrupt amplitude decrease of cross-correlated waveforms. In reality dispersive surface gravity waves propagate at the speed slower than the long-wave and appear later than the virtual tsunami.

The extracted virtual tsunami waveforms were then analyzed for the phase velocities of tsunamis between two points. Subtracting the initial phase from the measured phase by assuming cylindrical 2D waves, we succeeded to measure the phase velocity of virtual tsunamis for the period range from 300 to 3000 s. The measurements were in good agreement with the tsunami phase velocities expected from the ocean depth. A clear reduction of phase velocity from long-wave speed, as predicted from the surface gravity wave theory, was detected for wave periods toward 300 s.

Keywords: tsunami waveform interferometry, DART, tsunami waveform, phase velocity of tsunami, dispersive tsunami, cross-correlation of ocean bottom pressure

Integrated Probabilistic Tsunami Hazard Assessment contributed from possible tsunami sources along Nankai Trough, Sagami Trough, and Japan Trench

*Kenji Hirata¹, Hiroyuki Fujiwara¹, Hiromitsu Nakamura¹, Masaki Osada¹, Tsuneo Ohsumi¹, Nobuyuki Morikawa¹, Shin'ichi Kawai¹, Takahiro Maeda¹, Hisanori Matsuyama², Nobuhiko Toyama², Tadashi Kito², Yoichi Murashima³, Yasuhiro Murata³, Takuya Inoue³, Ryu Saito³, Shin'ichi Akiyama⁴, Mariko Korenaga⁴, Yuta Abe⁴, Norihiko Hashimoto⁴, Tomoya Hakamata⁴

1. National Research Institute for Earth Science and Disaster Resilience, 2. OYO, 3. KKC, 4. CTC

Last years, we presented regional Probabilistic Tsunami Hazard Assessments (PTHAs) for three coastal zones along Nankai Trough, Sagami Trough, and Japan Trench (Hirata et al., 2014, 2015, AGU; Hirata et al., 2016, SSJ). In three PTHAs, our procedures are follows; (i) we consider all possible earthquakes in the future, including those that Earthquake Research Committee (ERC), the Headquarters for Earthquake Research Promotion (HERP) of Japanese Government already assessed. (ii) We construct a set of Characterized Earthquake Fault Models (CEFM), for all the possible earthquakes (Toyama et al., 2014, 2015, JpGU; Kito et al., 2016, JpGU). (iii) For all the CEFMs, we compute tsunamis by solving a nonlinear long wave equation, using FDM, including runup calculation, over a nesting grid system with a minimum grid size of 50 meters. (Saito et al., 2014, 2015, JpGU; Takayama et al., 2017, JpGU) (iv) Finally, we gather excess probabilities for variable tsunami heights, calculated from all the CEFMs, at every observation point along the coastal zone to get PTHA. We incorporated aleatory uncertainties inherent in tsunami simulation and earthquake fault slip heterogeneity in the integration process (Korenaga et al., 2014, JpGU; Abe et al., 2014, JpGU).

In this study, we integrate three of the regional PTHAs calculated from all possible earthquakes along Nankai Trough, Sagami Trough, and Japan Trench to get a nationwide PTHA. We will make two kind of the probabilistic tsunami hazard maps; one is "Present-time hazard map" under an assumption that earthquake occurrence basically follows a renewal process based on BPT (Brownian Passage Time) distribution. The other is "Long-time averaged hazard map" under an assumption that earthquake occurrence follows a stationary Poisson process. The former is based on long-term assessments for the forthcoming large earthquakes in three subduction-zones. So it offers a probabilistic tsunami hazard map that naturally corresponds to a set of the long-term assessments of the forthcoming earthquakes, for three subduction-zones above, published by ERC/HERP. On the other hand, the latter is effective for us to make social/infrastructural preparations over hundreds year long.

A Present-time hazard map, showing the probability that the tsunami height will exceed 3 meters at coastal points in next 30 years (starting at 1st January, 2016), suggests high possibility over 60% in several coastal zones along the southern coasts of Shikoku to Tokai region, perhaps due to contribution from the next Nankai earthquake. Since the occurrence probability for the next 30 years, starting from 2013/01/01, is assessed 60% to 70% by ERC, this high possibility of 60% means that almost all the tsunami heights in the several coastal zones will tend to be greater than 3 meters. However, a long-time averaged hazard map, showing the probability that the tsunami height will exceed 3 meters at coastal points in next 30 years, suggests a not-so high possibility less than 20-30% for coastal zones along the Pacific coast. This is because long-time averaged hazard maps do not present an impending danger but do give a long-term perspective over hundreds to thousands years.

Keywords: probabilistic tsunami hazard assessment, probability, tsunami, Nankai Trough, Sagami Trough, Japan Trench

Examination of tsunami fault model for the 17th century great earthquake in eastern part of Hokkaido.

*Takashi YOKOTA^{1,2}, Makoto NEMOTO³, Shiro TAKASE³, Shunichi AZUMA³, Koji TAKATA¹, Masaya IKEDA¹

1. Cabinet Office, 2. AICHI INSTITUTE OF TECHNOLOGY, 3. OYO CORPORATION

The Cabinet Office is conducting examination of the largest class earthquakes occurring in the Japan Trench and the Kuril Trench in the "Council for studying megaquake models in the Japan trench and the Kuril trench (established in February 2015)". As a part of the council, Yokota et al. (2015) re-examined tsunami fault model for the 2011 off the Pacific coast of Tohoku Earthquake and currently construct tsunami fault model for the 17th century great earthquake in eastern part of Hokkaido.

Compared with Nankai Trough, there is a small amount of historical data for the 17th century great earthquake. However, investigation of the tsunami deposits for the 17th century great earthquake has been actively carried out not only near the coast but also in inland areas (e.g. Nanayama et al. (2003); Hirakawa et al. (2005)). Some researchers (e.g. Satake et al. (2008); Ioki and Tanioka (2016)) reported the tsunami fault model that explained inundation and coastal tsunami heights estimated by the deposits data. They tried to estimate the tsunami fault model with a few rectangle fault planes that explained inundation and coastal tsunami heights using tsunami forward simulations.

In this study we estimated the fault slip distribution on the Kuril plate using tsunami inversion analysis with inundation and coastal tsunami height data. To solve the inversion, it is crucial whether the fault slip reaches to the Kuril Trench or not. Therefore we assumed two models, i.e. Model-A and Model-B. The slip of Model-A reaches to the Kuril Trench, but that of Model-B does not reach to the Kuril Trench.

Characteristics of Model-A and Model-B are as follows:

1) Model-A : $M_w=9.2$, $M_t=9.1$



Maximum slip is 68 meters and average one is 14 meters.

2) Model-B : $M_w=9.1$, $M_t=9.0$

Maximum slip is 36 meters and average one is 11 meters.

Although the two models equally reproduce inundation and coastal tsunami heights, the obtained slip near the Kuril Trench of Model-A is much larger than that of Model-B. One of the reasons for this is that the dip angle of the plate near the Kuril Trench is smaller than that of the plate at the deeper region of the fault and the slip near the Kuril Trench of Model-A must be larger to generate powerful tsunami.

Keywords: tsunami fault model, tsunami deposit, inversion, earthquake hazard assessment

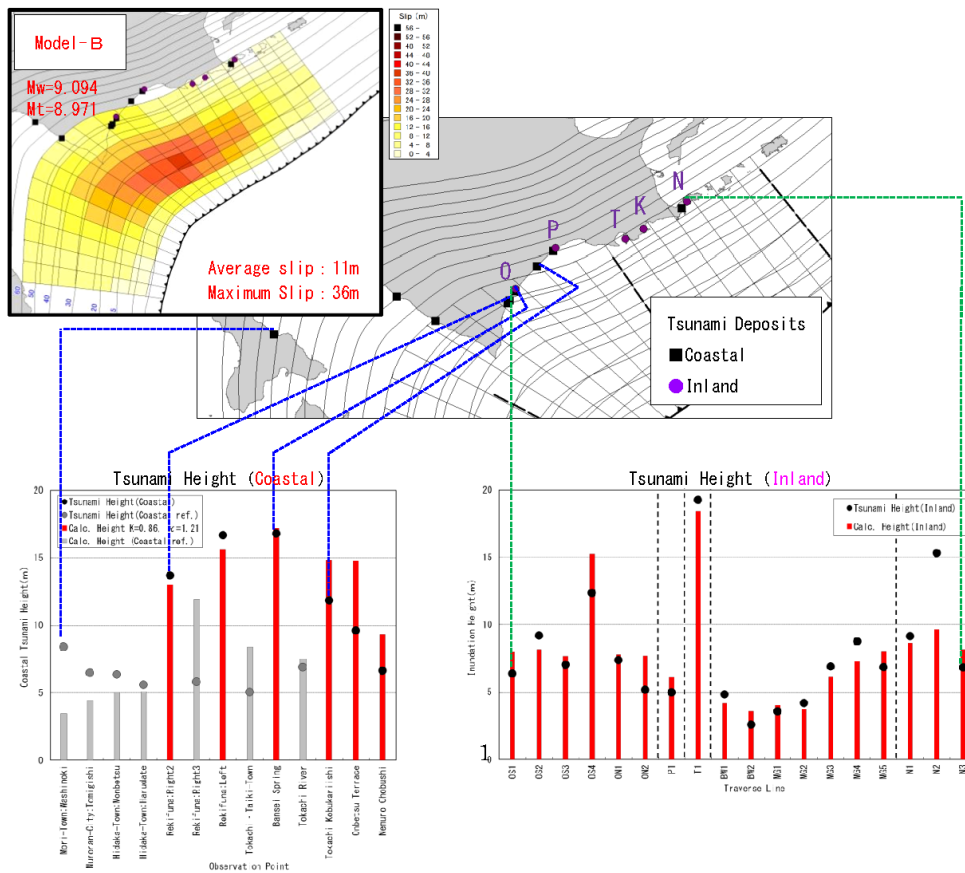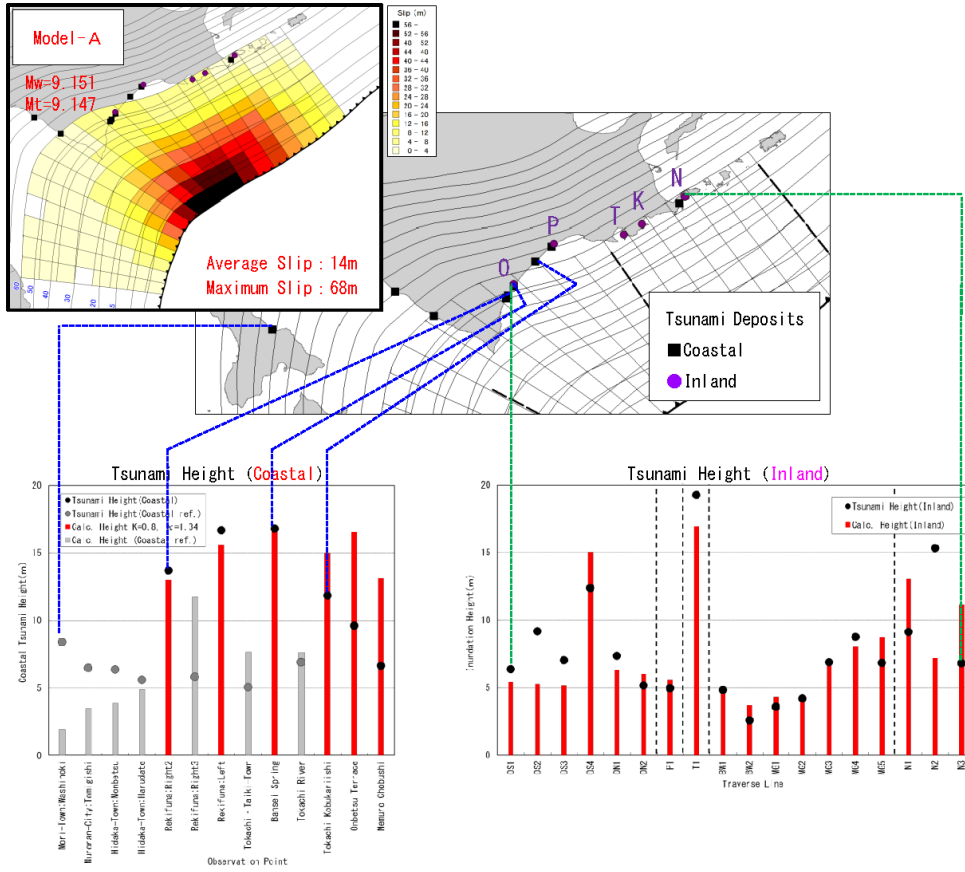

Developmental status of real-time tsunami inundation forecast system using S-net

*Naotaka YAMAMOTO¹, Shin Aoi¹, Wataru Suzuki¹, Narumi Takahashi¹, Takeshi Nakamura¹, Kenji Hirata¹, Takashi Kunugi¹, Hiromitsu Nakamura¹

1. National Research Institute for Earth Science and Disaster Resilience

We designed a database-driven real-time tsunami inundation forecast system based on the multi-index method with correlation coefficient and two kinds of variance reductions. And we implemented a prototype system for the Pacific coast of Chiba prefecture (Kujukuri-Sotobo region), Japan using the Seafloor Observation Network for Earthquakes and Tsunamis (S-net). To evaluate the propriety of our developed system, we investigated whether it is possible to select appropriate tsunami scenarios from Tsunami Scenario Bank (TSB) for the 1677 Enpo Boso-oki earthquake as “pseudo observation” and the November 22, 2016 Mw 7.0 earthquake off Fukushima prefecture, Japan. This work was partially supported by the Council for Science, Technology and Innovation (CSTI) through the Cross-ministerial Strategic Innovation Promotion Program (SIP), titled “Enhancement of societal resiliency against natural disasters” (Funding agency: JST).

Keywords: S-net, Seafloor observation network, Tsunami, Real-time forecast

Nonlinear parametric model based on power law for tsunami height prediction

*Masashi Yoshikawa¹, Shin Murata¹, Yasuhiko Igarashi¹, Toshitaka Baba², Takane Hori³, Masato Okada¹

1. Graduate School of Frontier Sciences, The University of Tokyo, 2. Institute of Technology and Science, The University of Tokushima, 3. Research and Development Center for Earthquake and Tsunami, Japan Agency for Marine-Earth Science and Technology

Dense Ocean-floor Network system for Earthquakes and Tsunamis (DONET) was constructed in offshore Wakayama prefecture to cope with the damage of the Nankai Trough earthquakes accompanied by a large-scale disaster. In DONET1, ocean-bottom pressure gauges are installed at 20 points, and it is possible to detect the pressure change caused by tsunami immediately. Moreover, by using a super computer it has become possible to simulate tsunami in various scenarios precisely and get the observation value of ocean-bottom pressure gauges in DONET1 and the tsunami height along the coast (Baba et al. 2014).

Methods of predicting tsunami have been proposed in previous studies. These methods predict the tsunami height by learning the relation between the ocean-bottom pressure and the tsunami height. A method using linear regression (Baba et al. 2014) and a method using Gaussian process (Igarashi et al. 2016) were proposed. However, the former method is impossible to learn the nonlinear relationship and to predict with high accuracy. On the other hand, the latter method is based on nonparametric model which is difficult to correspond to the physical model.

In this study, we propose a nonlinear parametric model based on the assumption that there is a nonlinear relation based on power law between the ocean-bottom pressure and the tsunami height. In this model, the relationship is expressed by the formula $d = a_1x_1^{b_1} + a_2x_2^{b_2} + \dots + a_{20}x_{20}^{b_{20}} + c$, where d is the tsunami height, x_i is the observation value of ocean-bottom pressure gauge, and a_i , b_i , and c are parameters.

An experiment to compare the accuracy of tsunami height predicting methods was carried out. As a result, we observe that the prediction error of the proposed method is 0.81m, where that of the linear regression is 1.28m. It decreased by 37%. Moreover, the prediction error of the proposed method is as low as that of the Gaussian process, 0.77m. According to the proposed method, it is possible to create an interpretable and highly accurate model that predict the tsunami height by learning the relation between the observation value of ocean-bottom pressure gauge and the maximum value of the tsunami height.

Keywords: Tsunami height prediction, Nonlinear parametric model, DONET

Extraction of tsunami response functions at small islands by averaging four tsunami spectra

*Kuniaki Abe¹

1. none

Tsunami power spectra obtained from the tide gauge records of four Pacific tsunamis, 1952 Kamchatka, 1960 Chile, 1964 Alaska and 2011 Tohoku, were used to extract response function of small islands. The extractions were applied to three small islands, Wake, Johnston and Midway, being located in north-west Pacific. Response function is defined as logarithm of spectral component averaged to the four tsunamis. It was derived for Wake, Johnston and Midway. The power spectra showed wavy ramp function in a log-log expression. The corner frequency is approximated to be 0.1 cycle/min (10 min in period) for Wake and Midway, and 0.032 cycle/min (30 min in period) for Johnston. Difference spectra defined as difference of the averaged spectrum to each tsunami spectrum were obtained to each tsunami. The difference spectra, being approximated as that of tsunami incident to the tide station, were compared with tsunami power spectra obtained at open ocean (DART21413) in the 2011 Tohoku tsunami and at Japanese coast (Ishinomaki, Sendai, Soma, Onahama and Ooarai) in the 2016 Off-Fukushima tsunami on Nov. 21, 2016. The difference spectrum of 2011 Tohoku tsunami at Wake is shown with tsunami spectrum and average spectrum in Fig. 1. At the same time spectrum of DART 21413 by NOAA is shown in the same figure. DART 21413 (30.55N, 152.13E) is located near the source and in the direction of N132E. On the other hand tide station of Wake is distant from the source and has an azimuth of N126E. Both the points have an almost same azimuth angle. The fact that main peaks in difference spectrum reproduce those of DART spectrum supports the response function. A part of tide gauge data is cited from webcites of NOAA and JMA. Author acknowledges the citation to NOAA and JMA.

Keywords: response function, island, tsunami spectra

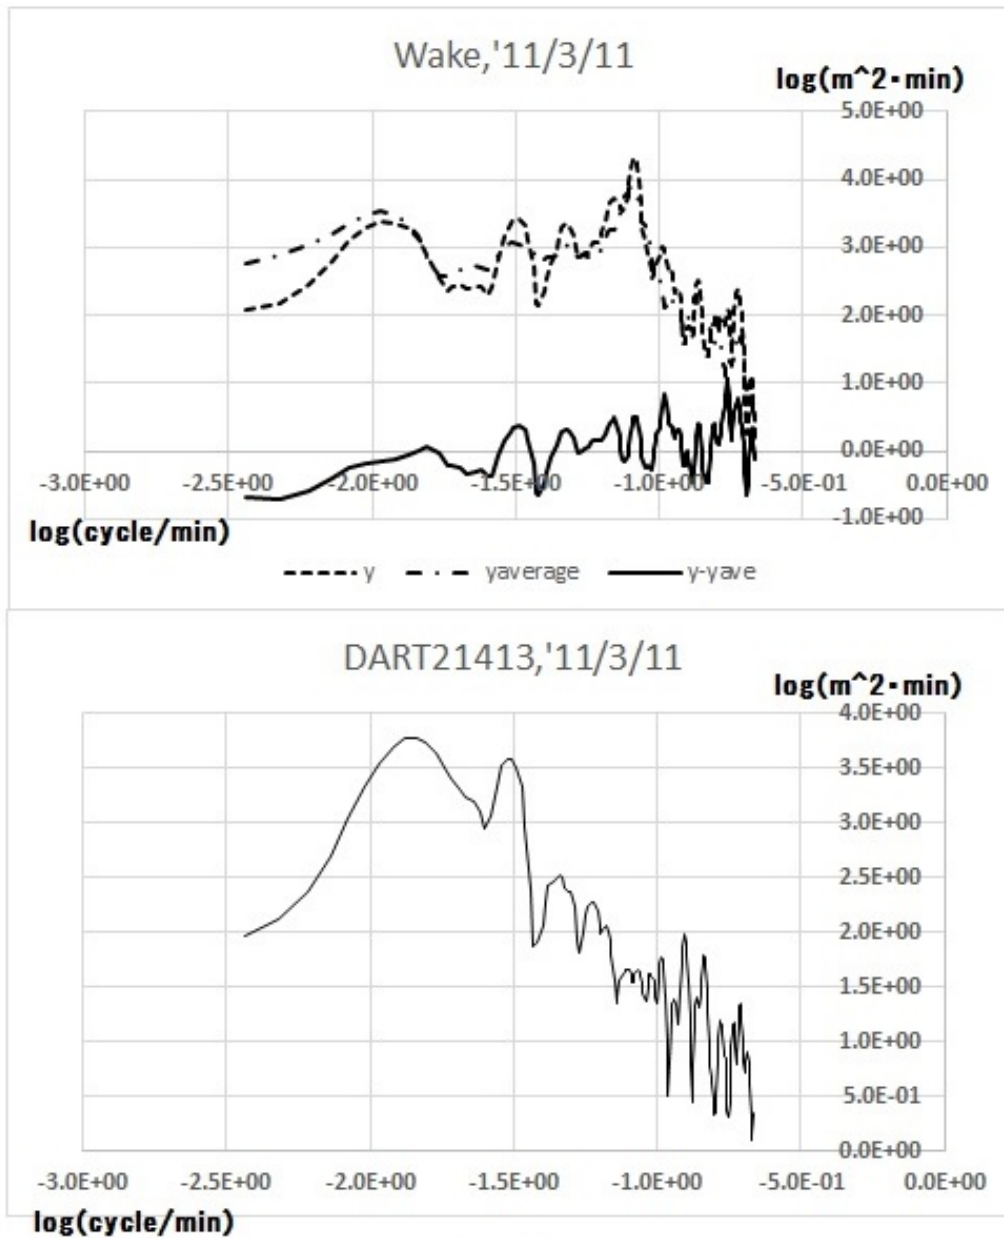


Fig.1

Fault model of the 1611 Keicho Tsunami earthquake (Mw9.0) estimated from historical documents using tsunami inundation simulation

Genta Fukuhara¹, *Yuichiro Tanioka¹

1. Hokkaido University, Institute of Seismology and Volcanology

The 1611 Keicho Tsunami earthquake generated huge tsunamis and caused a disaster along the Pacific coast of Tohoku area from Fukushima to Miyako. There are several historical documents, but some of them were controversial. Recently, Ebina and Imai (2014) checked historical documents in detail and made the most reliable data set of the tsunami inundation of the 1611 Keicho Tsunami. We compared the data set with the tsunami inundation of the 2011 Tohoku tsunami and found that the tsunami from the 1611 tsunami earthquake inundated larger distance than the 2011 Tohoku tsunami at many places. The numerical tsunami inundation computations with various fault models were carried out along the Pacific coast of Tohoku. The computed inundation were compared with reliable tsunami evidences of historical documents in Ebina and Imai (2014 in Japanese), such as tsunami evidence about 30 m height at Koyadori in Iwate or tsunami evidence at Suwa in the Sendai plain about 7 km away from the coast. Results indicate that the tsunami generated from the combination of two rectangular fault models, north fault with the length of 100 km, the width of 100 km, and the slip amount of 80 m and south fault with the length of 150km, the width of 100 km, and the slip amount of 40 m, explains all reliable evidences very well. The moment magnitude of the 1611 tsunami earthquake is calculated to be 9.0 by assuming that the rigidity is 3×10^{11} N/m². The moment magnitude of the 1611 Keicho tsunami earthquake is the same as that of the 2011 Tohoku-oki earthquake.

The northern part of the fault with a slip amount of 80 m was not ruptured by the 2011 Tohoku-oki earthquake but located at north of the rupture area. The southern part of the fault, where 40 m slip was estimated, is located at the almost same area of the large slip area of the 2011 Tohoku-oki earthquake. This suggested that the 2011 Tohoku-oki earthquake re-ruptured the southern part of fault area ruptured by the 1611 Keicho tsunami earthquake. This southern part was also ruptured by the 869 Jogan earthquake previously. Because the plate convergence rate of Pacific plate along the Japan Trench is about 9 cm/year, a large slip of 40 m by the 1611 Keicho tsunami earthquake is slightly smaller than 65 m accumulated after 869 Jogan earthquake. But a large slip of about 45 m estimated for the 2011 Tohoku-oki earthquake is slightly larger than 36 m accumulated after the 1611 Keicho tsunami earthquake. Because the above differences are not so large, it can be caused by the different slip distributions of three earthquakes.

Keywords: 1611 Keicho Tsunami Earthquake, Tsunami inundation simulation, 2011 Tohoku-oki Earthquake

Tsunami and landslide model due to the 1741 Oshima-Oshima eruption in Hokkaido, Japan

*Kei Ioki¹, Hideaki Yanagisawa², Yuichiro Tanioka³, Gentaro Kawakami⁴, Yoshihiro Kase⁴, Kenji Nishina⁴, Wataru Hirose⁴, Satoshi Ishimaru⁴

1. National Institute of Advanced Industrial Science and Technology, 2. Department of regional Management, Faculty of Liberal Arts, Tohoku Gakuin University, 3. Institute of Seismology and Volcanology, Hokkaido University, 4. Geological Survey of Hokkaido, Hokkaido Research Organization

The 1741 tsunami was generated by the Oshima-Oshima sector collapse in the southwestern Hokkaido, Japan. The tsunami caused great damage along the coast of Japan Sea in Oshima and Tsugaru peninsula. By the survey of tsunami deposits, at the coast of Okushiri Island and Hiyama in Hokkaido, tsunami deposits of this tsunami were found. In this study, the landslide and tsunami by the Oshima-Oshima eruption were modeled to explain distribution of debris deposits, tsunami heights by historical records, and distribution of tsunami deposits. First, region of landslide and debris deposits were made out from the bathymetry based on the bathymetry survey data (Satake and Kato, 2001) in the north part of Oshima-Oshima. In addition, topography before the sector collapse and landslide volume were re-estimated. The volume of landslide was estimated at 2.2 km³. Based on those data, the landslide and tsunami were simulated using the integrated model of landslide and tsunami considered soil mass and water mass (Yanagisawa et al., 2014). As the results, soil mass slid slowly submarine slope and stopped after about 15 minutes. On the other hand, the first wave of tsunami were generated during 1 minute that soil mass slide. Distribution of computed debris deposits agree relatively well with region of debris deposits made out from the bathymetry. Calculated tsunami heights match with historical records along the coast of Okushiri and Hiyama in Hokkaido. Calculated inundation area of tsunami cover distribution of tsunami deposits found by tsunami deposits survey in Okushiri and Hiyama coast.

Keywords: tsunami, landslide, Hokkaido

Ray tracing for dispersive tsunamis and estimation of initial sea-surface displacement: Application to the 2015 Smith Caldera earthquake

*Osamu Sandanbata¹, Shingo Watada¹, Kenji Satake¹, Yoshio Fukao², Hiroko Sugioka³, Aki Ito², Hajime Shiobara¹

1. Earthquake Research Institute, the University of Tokyo, 2. Japan Agency for Marine-Earth Science & Technology, 3. Department of Planetology, Kobe University

Ray tracing method based on the optics theory has been applied to tsunamis in order to calculate travel times and refractions due to bathymetry variations. Previous methods are applicable to linear long-waves [e.g. *Satake, 1988, PAGEOPH; Woods and Okal, 1987, GRL*]. However, real tsunamis are dispersive, that is, have frequency-dependent propagation speeds so that the method needs to be extended to dispersive tsunamis.

The method is also used for estimation of the initial sea-surface displacement in combination of Green's law, that is based on the conservation law of the potential energy of linear long-waves [e.g. *Abe, 1973, PEPI; Satake, 1988, PAGEOPH*]. By using the law, previous studies estimated the height of the initial sea-surface displacement assuming that the peak amplitudes of the initial displacement and outgoing waves from a source region are the same. However, this assumption might lead to an underestimation of the initial wave height, because tsunami waves behave differently inside the source region.

In this study, we first propose a new ray-tracing method extended to dispersive tsunamis. We create frequency-dependent velocity maps from 2-D bathymetry data by solving iteratively the formula of dispersion relation of the linear gravity wave by a recursive algorithm. Then ray paths at different fixed frequencies are traced on the frequency-dependent velocity fields by integrating ray equations for seismic surface waves [e.g. *Yomogida and Aki, 1985, JGR*].

For more precise modeling of the initial sea-surface displacement, we investigate tsunami behaviors near the source region by waveform simulations to confirm that outgoing waves from the source region have a wave height less than a half of the height for various initial sea-surface displacement models. We propose an alternative way to estimate the initial sea-surface displacement. First, the source region is estimated by means of the back-projection using arrival times of tsunami signals at stations. Secondly, the wave height of outgoing waves from the source region is derived from an observed height by using Green's law. Finally, we obtain the height of the initial sea-surface displacement by using the ratio of the peak amplitudes of the initial static displacement models and simulated outgoing waves from the source region.

These two methods are applied to a real tsunami event that was caused by an abnormal volcanic earthquake near Smith Caldera with a diameter of about 7 km on the Izu-Bonin arc. The earthquake had a CLVD-type focal mechanism and generated larger tsunami waves compared to its magnitude (M5.7), and therefore the earthquake may be regarded as a "volcanic tsunami earthquake." Dispersive tsunamis were recorded by a dense array of ocean bottom pressure (OBP) gauges, 100 km to the NNE from the epicenter [*Fukao et al., 2016, JpGU*]. It is notable that the measured slowness direction of wavefront deviates from the great circle path and varies as a function of frequency.

Our new ray tracing for dispersive tsunamis shows that ray paths are significantly dependent on its frequency, particularly at deep oceans. Simulated slowness direction and arrival time at the array change

as a function of frequency, which is consistent with the observations by *Fukao et al.* [2016, JpGU]. By minimizing the misfit between observation and ray tracing, the peak point of the tsunami source can be constrained within Smith Caldera. In addition, we model the initial sea-surface displacement using our new method with the tsunami data at the OBP array. The boundary of the source region is located close to the inner-wall of Smith Caldera. By assuming a column-shaped displacement with the size of Smith Caldera, we obtain the initial wave height of at least 30 cm. Although some uncertainties remain, these results imply that these methods are very powerful to preliminarily estimate the initial sea-surface displacement.

Keywords: ray tracing, dispersive tsunamis, tsunami analysis, volcanic earthquake, tsunami earthquake

Oceanfloor network system and real-time tsunami prediction system

*Narumi Takahashi¹

1. National Research Institute for Earth Science and Disaster Resilience

Very severe damages were brought by huge tsunami accompanied with the 2011 off Tohoku earthquake. It is important to take measures for tsunami to reduce the damages using real disaster scenarios. To use their scenarios on actual implementation, it is indispensable to detect tsunami, and to understand the situation from propagation of tsunami to its inundation.

Around the Nankai Trough area, which is concerned about future large earthquake, the dense ocean-floor network system for earthquakes and tsunamis (DONET) was constructed and implemented. A real-time tsunami prediction system using DONET was developed by JAMSTEC and is revised in collaboration among NIED, JAMSTEC and NTT data CCS to introduce DONET2 data in the Nankai area. The system predicts tsunami arrival time and the height with an inundation map based on amplification of the tsunami during the propagation using the database with fault models of over 1500 cases. In other words, it uses correlation between maximum average values of absolute pressure gauge data and maximum tsunami height of the predicted points. To develop it to improve the prediction, fault models to be used for the prediction are sorted out using differences of trigger times for the earthquake and tsunami between DONET observatories. In addition, the used DONET observatories are also sorted out based on the direction of the tsunami propagation for each predicted point. The system using DONET1 data in the Tonankai area is already implemented by prefectures of Wakayama and Mie, Chubu electronic power, and Owase city, and the new version is under verification. This system does not determine one best fault model, and selects some worse cases to be satisfied some conditions for the predicted point. Therefore, it reflects heterogeneous slip distribution and local effects like landslide on the sea bottom.

It is indispensable for the implementation to evaluate the quality of the input data. Knowing the data quality and considering the implementation by local governments, the system should have flexibility to be able to prevent issues like lack of data and comprehensibility for the implementation. The visualization and prediction method depend on the purposes and the locality of the target. I point hybrid system adopting some prediction method and the visualization considering user's confusion by multiple prediction data.

Keywords: Tsunami, real-time prediction, DONET

Application of Tsunami Information to Disaster Mitigation in Chiba Pref.

*Tomohiro Kubo¹, Masahiro Ooi¹, Wataru Suzuki¹

1. National Research Institute for Earth Science and Disaster Prevention

We engage in educational activities on the disaster management staff in local government and local residents in the Chiba Prefecture for the tsunami disaster mitigation, To put over the important of the evacuation during Tsunami disaster, we promote the activity based on the AIDMA that is the marketing framework. We report the activity during 3 years supported by the SIP Project.

I wish this English abstract would help for the disaster mitigation.

Keywords: Tsunami Information, Education for Disaster Mitigation, AIDMA

Height Distribution of the tsunami of the Keicho Earthquake of February 3, 1605 on the coast of the Boso Peninsula

*Yoshinobu Tsuji¹, Yosuke Kuroyanagi², Takahiro Kinami³, Masami Sato⁴, Yayoi Haga⁴, Fumihiko Imamura⁴

1. Fukada Geological Institute, 2. Pacific Consultants Co. Ltd., 3. Kubiki Engineering Co. Ltd., 4. IRIDeS, Tohoku Univ.

The tsunami of the Keicho Earthquake of February 3, 1605 was recorded at the points on the Pacific coast of the western part of the Japanese Islands, and is sometimes regarded as one of the Tokai Gigantic earthquakes. In the present study we made clear the detailed distribution of heights of the tsunami of this earthquake on the open coast of the Boso Peninsula, Chiba Prefecture. The basic document of the present study is called "The Boso Chiran-ki" (Chronology of inner battle in Boso Peninsula), in which the names of 35 tsunami damaged villages were listed and the locations of these villages are shown by small circles in the Figure. There is a no damage coast of the length of about 12 kilometers between Katsuura town and Uchiura village, which is presumable that only a slight damage took place in this coastal section. The Text of "Toudai-ki (The Chronology of the years under the rule of the first Shogun Ieyasu Tokugawa)" also recorded this tsunami, and seven villages in the territory of Ootaki clan were swept away and nothing left on the ground. The locations of these seven villages are shown by black diamonds in Figure. A temple called Saitokuji in Amatsura village in Kamogawa city, handed down an old document in which it is recorded that all houses were swept away in this village. We made a field measurement in those villages. We obtained the tsunami height distribution is shown as the figure. The tsunami height exceeded 10 meters at sixteen points. Considering this tsunami height distribution, the 1605 Keicho earthquake is not considered as one of the series of the Off-Tokai gigantic earthquakes. Acknowledgement: This study was achieved as a part of the commissioned research named "Study on the historical tsunamis in the Pacific coast of Japan (2016)" on disaster prevention for nuclear facilities proposed by the Nuclear Regulation Authority, Japan.

Keywords: the 1605 Keicho Earthquake-Tsunami, Historical Earthquake, Historical Tsunami, Boso Peninsula, Japan Trench

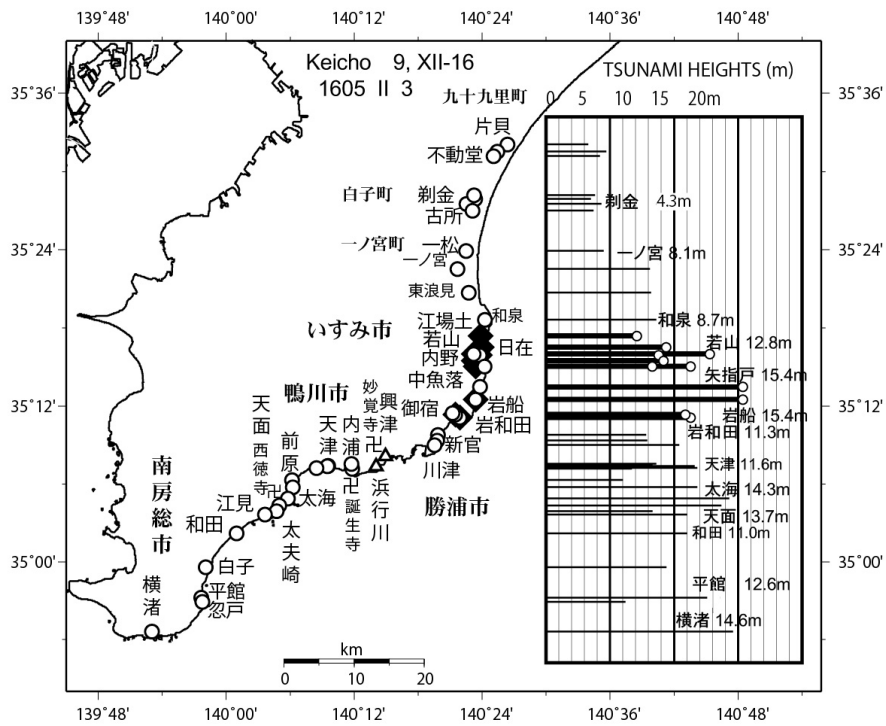


図 慶長9年12月16日（1605年2月3日）関東南方沖地震による房総半島の津波高さ
 ◆ 『当代記』によって、小多喜領七ヶ村が「中二モ七村は跡形モナシ」と記された集落。
 ○ 『房総治乱記』に「先潮災二逢シハ」で始まる文章で記された35ヶ村。4ヶ村は『当代記』に「あとかたもなし」と記された村と重複している。勝浦市川津以西、鴨川市内浦までの約13kmの間にある集落は被災した村が無く、この間は無事であったらしい。

Maximum initial tsunami height estimation 10 min after large earthquake using initial total electron content pulse observation

*Takuma Tsuruda¹, Yuto Tomida¹, Tomoya Ishikawa¹, Aditya Gusman², Masashi Kamogawa¹

1. Department of Physics, Tokyo Gakugei University, 2. Earthquake Research Institute, The University of Tokyo

Ionospheric plasma disturbances after a large tsunami can be detected by measurement of the total electron content (TEC) between a Global Positioning System (GPS) satellite and its ground-based receivers. Nine minutes after initial sea surface enhancement in tsunami, TEC pulse enhancement equatorialward from the tsunami source area clearly appeared. In this study, we show the relationship between the TEC change and the initial tsunami height, which implies that the detection of the initial TEC pulse might contribute to tentative information of initial tsunami height.

Keywords: Ionospheric disturbance, Total electron content, Tsunami

Inversion of the perturbation GPS-TEC data induced by tsunamis in order to estimate the sea level anomaly.


*Virgile Rakoto¹, Philippe Lognonné¹, Lucie Rolland²

1. Institut de Physique du Globe de Paris, 2. Université Côte d Azur, OCA, CNRS, IRD, Géoazur, Valbonne, France

Large underwater earthquakes ($M_w > 7$) can transmit part of their energy to the surrounding ocean through large sea-floor motions, generating tsunamis that propagate over long distances. The forcing effect of tsunami waves on the atmosphere generate internal gravity waves which produce detectable ionospheric perturbations when they reach the upper atmosphere. These perturbations are frequently observed in the total electron content (TEC) measured by the multi-frequency Global navigation Satellite systems (GNSS) data (e.g., GPS, GLONASS). In this paper, we performed for the first time an inversion of the sea level anomaly using the GPS TEC data using a least square inversion (LSQ) through a normal modes summation modeling technique. Using the tsunami of the 2012 Haida Gwaii in far field as a test case, we showed that the amplitude peak to peak of the sea level anomaly inverted using this method is below 10 % error. Nevertheless, we cannot invert the second wave arriving 20 minutes later. This second wave is generally explain by the coastal reflection which the normal modeling does not take into account. Our technique is then applied to two other tsunamis : the 2006 Kuril Islands tsunami in far field, and the 2011 Tohoku tsunami in closer field. This demonstrates that the inversion using a normal mode approach is able to estimate fairly well the amplitude of the first arrivals of the tsunami.

Keywords: tsunami modes, gravity waves, inversion, Total Electron Content (TEC)

Tohoku Earthquake and tsunami occurred the 11/03/2011

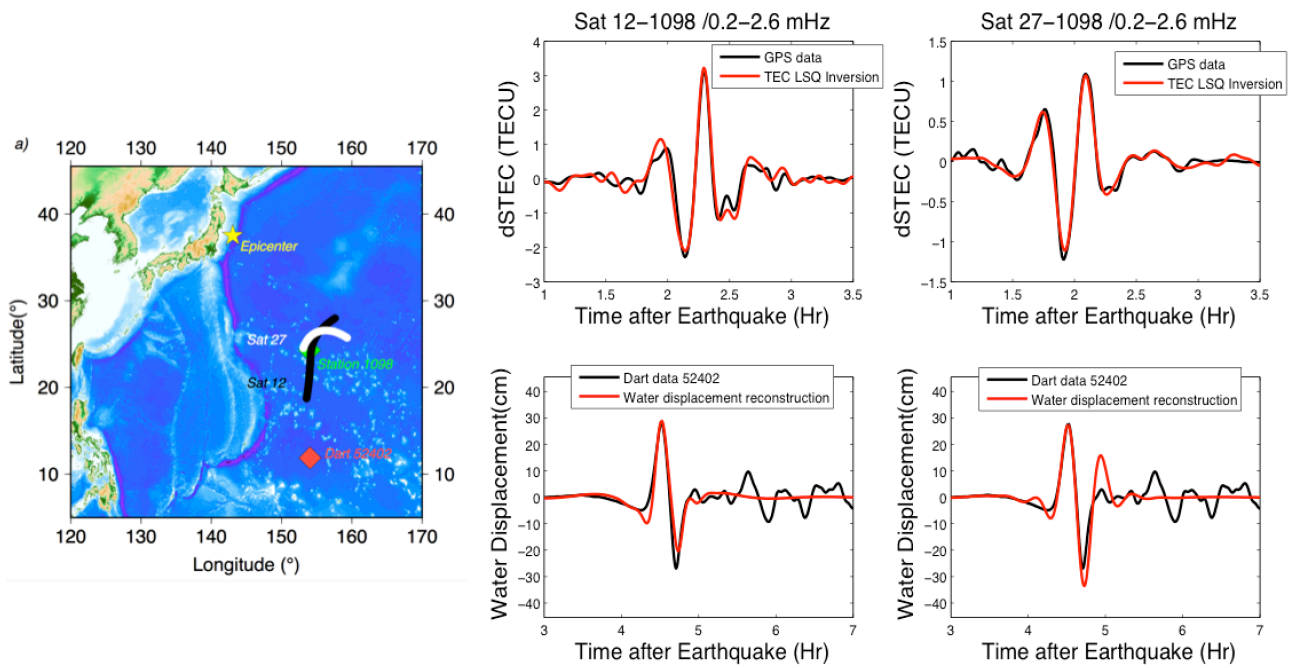

-15.4 min. shift applied

Error on max. tsunami height estimation: 12.5%

The effectiveness of Green's Function based Time Reverse Imaging method for tsunami source estimate

*Md Jakir Hossen¹, Phil Cummins², Kenji Satake³

1. Earth Research Institute, University of Tokyo, Japan; BRAC University, Bangladesh, 2. Australian National University, Australia, 3. Earth Research Institute, University of Tokyo, Japan

We developed a Green's Function based Time Reverse Imaging (GFTRI) method in order to recover the initial sea surface displacement associated with tsunami generated by undersea earthquake, submarine landslide etc. This method has the same source representation as the least square (LSQ) source inversion method. In GFTRI method, the source region is divided into a number of source patches and Green's functions (GF) are computed using a unit point source located over each source patch. Instead of using LSQ method, this method uses time reverse imaging method to estimate tsunami source by convolving GFs with time-reversed observed waveforms. This method was implemented in the 2011 Tohoku-Oki earthquake tsunami. In this work, we implemented the method to the 2009 Samoa tsunami whose source mechanism is believed to be complex. For this event, only few observations are available and many of them are located quite far way from the source and contain reflected, refracted, or even scattered waves. So, it is an ideal event to examine whether the method is capable of reconstructing a source model associated with earthquake source having double-couple feature using only the first wave (FW) or the first wave with later arrivals (FL). We carried out several experiments with synthetic waveforms and results indicate that the method is able to extract complex features of the earthquake. We, then, applied this method with actual tsunami waveforms of the Samoa 2009 tsunami (both FW and FL) and our results suggest that this tsunami occurs due to both normal and thrust faulting. Our finding is very consistent with previous studies of seismic waveforms for this earthquake that have suggested the event is a doublet, consisting of both an outer rise normal fault and megathrust rupture.

Keywords: Tsunami , time reverse imaging, source inversion

Potential for real-time Tsunami Monitoring using DAS Technology

*Tsunehisa KIMURA¹

1. Schlumberger

DAS (Distributed Acoustic Sensing) technology was introduced in 2011 for the demands of pipeline monitoring and intrusion detection in Oil & Gas business. The latest optical fiber sensing technology using 'differential phase' data now allows DAS to record seismic signal including VSP (Vertical Seismic Profiling). In addition, it has been experimenting to monitor the well production status qualitatively using flow measurements by detecting vibration noise induced by the flow. The system is called 'hDVS' (heterodyne Distributed Vibration Sensing).

Unlike conventional monitoring system, which usually use electro-magnetic sensor such as geophone, hydrophone and pressure gauge, hDVS uses optical fiber as vibration sensor. It measures dynamic strain of the optical fiber, either SMF (Single-Mode Fiber) or MMF (Multi-Mode Fiber) for entire length or a section defined by the user.

Conventional electro-magnetic tsunami sensors have been installed in the Pacific Ocean off the coast of Tohoku region and all over the coastline of Japan after the Tohoku earthquake and tsunami in 2011, together with seismometers. However, the measurement of the conventional sensors are point basis, while installation cost and environmental ratings of the conventional sensors limits the number and location of the sensor installations. Hence, the distance between the sensors is quite large in reality, so that the tsunami passing through between the sensors cannot be monitored.

When the Tohoku earthquake and tsunami in 2011 occurred, the expecting height of the tsunami wave when it reached the coast and the time of arrival were calculated based on the available data from limited number of tsunami sensors and the data from seismometers. There was an opinion [NHK documentary et al.] that uncertainty of such information might lead delay or misplace of the evacuation for the affected people. It is impossible to monitor and predict the behavior of a big tsunami that is beyond expectations using the data from very limited number of sensors.

In case of hDVS system, any existing ocean bottom optical fiber installations, which have been used for data transmission purpose mainly, would become line shaped flow sensor. This fact allows installation cost and time minimized. Especially, the international ocean bottom optical fiber cables were installed over the seismogenic areas where the boundaries of the plates existing, toward the seacoast of Japan straightaway. Hence, it would be possible to monitor the water flow from the seismogenic areas to the seacoast successively. Such flow data would be potential to be a certain data representing behavior of tsunami when hit. The intensity of the vibration to be increased when height of tsunami increases, therefore, the estimated height of tsunami would be able to be calculated based on the hDVS data. It was reported that several ocean bottom fiber cables were damaged by tsunamis in 2011 Tohoku earthquake, which resulted loss of optical communication, however, hDVS seismic monitoring can still be continued from the interrogator up to the damaged point.

Using hDVS technology by monitoring the development of tsunami continuously from several tens of kilometers off the coast would trigger certain tsunami warning on time, it is believed that loss of human life would be minimized from upcoming big tsunami events.

Keywords: DAS, hDVS, optical fiber, tsunami, real-time monitoring, flow

Tsunami simulations for probabilistic tsunami hazard assessment in the Japan Trench, the Nankai Trough and the Sagami Trough

*Ryu Saito¹, Tadashi Kitou², Norihiko Hashimoto³, Yasuhiro Murata¹, Takuya Inoue¹, Jyumpei Takayama¹, Yoichi Murashima¹, Hisanori Matsuyama², Shinichi Akiyama³, Hiromitsu Nakamura⁴, Kenji Hirata⁴, Hiroyuki Fujiwara⁴

1. KOKUSAI KOGYO CO., LTD, 2. OYO Corporation, 3. ITOCHU Techno-Solutions Corporation, 4. National Research Institute for Earth Science and Disaster Prevention

NIED began a research project regarding probabilistic tsunami hazard assessment (PTHA) for Japan (Fujiwara et al., 2013, JpGU), and gave an overview of the assessment (Hirata et al., 2014, 2015, 2016, JpGU). Also, we presented preliminary simulation results that showed tsunami height along shorelines of the Pacific Ocean where earthquake source regions along the Japan Trench, the Nankai Trough and the Sagami Trough locate (Takayama et al., 2016, JpGU; Saito et al., 2016, SSJ). Aggregating these simulation results, in this study, we discuss the tsunami height along the coastal regions. Our research target includes not only the subduction earthquakes that are mainly considered by the possible tsunami-genic earthquake derived from a seismic slip on a plate boundary in subduction zone but also unspecified fault sources such as small and medium scale earthquakes without offshore active faults. In the previous studies, Toyama et al. (2014, 2015, JpGU) and Kito et al. (2016, JpGU) introduced how to build up a set of characterized earthquake fault models (CEFMs) on hypothesized earthquakes along the Japan Trench, the Nankai Trough and the Sagami Trough, referring to the “Long-term evaluation of seismic activity for the region from the off Sanriku to the off Boso (2nd edition, 2011)” , ” Long-term Evaluation of earthquakes in the Nankai Trough region (2nd edition, 2013)” and “the National Seismic Hazard Maps for Japan (2014)” respectively that are published by the Headquarters for Earthquake Research Promotion (HERP). We constructed a set of the 571 CEFMs for specified earthquakes and 1319 CEFMs for the others in 40 patterns of source regions along the Japan Trench, the 3897 CEFMs for specified earthquakes and 48 CEFMs for the others in 210 patterns of source regions along the Nankai Trough, and the 135 CEFMs for specified earthquakes and 928 CEFMs for the others in 12 patterns of source regions along the Sagami Trough. Then, the total number of the CEFMs reaches about 6900. With these CEFMs, a tsunami run-up simulation estimates tsunami wave height along the pacific coast from Kagosima to Hokkaido prefectures, solved by the non-linear shallow-water equation using a leap-frog scheme. These simulations are configured by a nested grid system consisting of four sub-regions from outer 1350 m to inner 50 m in a horizontal, landward inundation keeping, and transparent at the seaward edges. Initial wave height follows vertical displacement driven by seafloor deformation via Okada’ s equation (Okada, 1992). The seafloor deformation consists of vertical and horizontal deformation. Toward research in the broad field of tsunami hazard we are planning to develop a database of coastal tsunami wave height provided in this study. This study was done as a part of the research project on probabilistic tsunami hazard assessment (PTHA) for Japan area by NIED.

Keywords: Tsunami hazard, Tsunami simulation, the Japan Trench, the Nankai Trough, the Sagami Trough

Integration of Probabilistic Tsunami Hazard Assessments along Japan Trench, Nankai Trough and Sagami Trough

*Yuta Abe¹, Mariko Korenaga¹, Shinichi Akiyama¹, Hisanori Matsuyama², Yasuhiro Murata³, Kenji Hirata⁴, Hiroyuki Fujiwara⁴

1. ITOCHU Techno-Solutions Corporation, 2. OYO Corporation, 3. KOKUSAI KOGYO Co., Ltd., 4. National Research Institute for Earth Science and Disaster Resilience

We have conducted a probabilistic tsunami hazard assessment (PTHA) along the Japan trench (Hirata et al., 2015), the Nankai trough (Abe et al., 2016a) and the Sagami trough (Abe et al., 2016b) with taking into account various uncertainty. By integrating the results of PTHAs along the three trenches, a risk of tsunamis occurring in the sea around Japan is comprehensively examined.

We set focal areas with conforming long-term evaluations by the Earthquake Research Committee (ERC) and make more than one earthquake fault models for each focal area to take into account uncertainty of heterogeneous slip distribution. In order to assess earthquakes which are not evaluated by ERC, we uniquely set their focal areas and earthquake fault models. For small earthquakes, we set one earthquake fault model for each focal area and assess the effect of heterogeneous slip by a probabilistic model.

We examine two kind of PTHAs for evaluating tsunami risks in different time-scale; one is “Present-time hazard” which shows a tsunami risk for 30 years out by estimating earthquake occurrence probabilities applying a renewal process based on BPT. The other is “Long-time averaged hazard” which shows a tsunami risk occurring once in thousands or tens of thousands by estimating earthquake occurrence probabilities applying a stationary Poisson process. For earthquakes which are not evaluated by ERC, we estimate their occurrence probability by applying Gutenberg-Richter law observed in each seismic region. For integration of the three PTHA, we calculate tsunami hazard curves along the three trenches and assume the occurrence of earthquakes along each trench as probabilistically independent event. Calculating integrated tsunami hazard curves for all coastal points and referring arbitrary tsunami heights from the tsunami hazard curves, we make tsunami hazard maps which show spatial distribution of exceedance probabilities.

Keywords: probabilistic tsunami hazard assessment, probability, long-term evaluation, tsunami analysis

Simulation of Tsunami Inundation in City Scale Model

*Takuya Miyashita¹, Nobuhito Mori²

1. CTI Eng. Co., Ltd., 2. Disaster Prevention Research Institute, Kyoto University

Objectives: The 2011 Tohoku Earthquake Tsunami showed complex behaviour of tsunami inundation over the land, especially in city areas, along the Japanese coast. The tsunami behaviour in these city urban areas was different from rural areas and indicated importance of physical roughness (e.g. buildings, houses and streets) on inundation characteristics and hydrodynamic force estimations. The purpose of this study is to understand and validate of two numerical models of tsunami inundation in the city area.

Methods: This study used quasi-three-dimensional (Q3D) model and two-dimensional (2D) nonlinear shallow water model for numerical simulation. Both models are hydrostatic model, Q3D is based on Regional Oceanic Modeling System (ROMS; Shchepetkin and McWilliams, 2005) but vertical discretization are different each other. The two different numerical models are compared to the physical experiments of Seaside, Oregon, by Park et al. (2013), which examined tsunami inundation in an idealized urban shoreline at 1/50 scale.

Results: Both 2D and Q3D model agreed well with the experimental results on the strait street from shorelines. However, the numerical models were differed from the experiment at the points behind large scale buildings. The inundation depth and velocity of the 2D simulation tended to be smaller than those of the Q3D model especially further inland. This is because the 2D model allows for larger wave energy dissipation due to a fixed vertical velocity profile and excluded turbulence and vorticity modelling.

Conclusions: The 2D and Q3D model are available to estimate the damage of the tsunami in city scale but the accuracy of inundation depends on the local reflection and diffraction due to large scale buildings. According to the comparison of Q3D model and 2D model, it is likely that the 2D model underestimates the inundation extent and local hydrodynamic forces during the tsunami inundation process.

Keywords: tsunami, quasi-3D

Transportation of sediment and heavy metal resuspended by a giant tsunami based on three dimensional, tsunami, ocean, and particle tracking coupled simulations

*Satoshi Nakada¹, Mitsuru Hayashi², Shunichi Koshimura³

1. Graduate School of Maritime Sciences, Kobe University, 2. Research Centre for Inland Seas, Kobe University, 3. International Research Institute of Disaster Science, Tohoku University

The Japanese government has reported that a Nankai Trough Earthquake will occur with approximately 70 % probability within 30 years and cause a giant tsunami. Giant tsunamis can disturb marine sediment and form muddy seawater in nearshore areas. Marine sediment can be resuspended and transported by not only the tsunami current but also by the tidal, wind-forced, and density currents in the coastal ocean. Because the marine sediment in the coastal oceans around megacities contains heavy metals and cysts of harmful algae, the resuspension of marine sediments can induce multiple forms of marine pollution, such as harmful red tides and heavy metal contamination in extensive areas. This study evaluated the transportation of resuspended sediment and zinc flux from the seabed in the urban semi-enclosed sea, Osaka Bay as a pilot ocean in terms of heavy-metal pollution based on the greatest tsunamigenic earthquake scenario along the Nankai Trough occurring in the near future. The high-resolution, three-dimension tsunami-ocean coupled simulation was conducted to simulate particle tracking assuming the sediment resuspension forced by tsunami. These simulations demonstrated that the marked resuspension areas of zinc “hot spots” were locally formed in the nearshore region around landfills, and the particles from seabed from those areas vertically advected to the upper layer in the nearshore region and transported offshore owing to the estuarine circulation. After the tsunami, the zinc was transported by the tidal and wind current and widely redeposited in the bay, and gradually migrated to the southern offshore region facing Pacific through the Kitan and Kii Strait. As a result, the benthic environment and ecosystem can be improved only in areas around the “hot spots” where the zinc concentration decreases.

Keywords: Giant tsunami, Heavy metal, Particle tracking simulation, Mega-earthquake along Nankai trough , Osaka Bay

Distribution of the heights of the tsunamis of the 1707 Hoi and the 1854 Ansei-Nankai Earthquakes on the coast between Tanabe City and Kushimoto Town, Wakayama Prefecture



*Takashi Yanuma¹, Yoshinobu Tsuji², Shintaro Ishizuka¹, Misako Ueno¹, Yuya Matsuoka³, Mutsumi Odagiri(Shiraishi)⁴, Masami Sato⁵, Yayoi Haga⁵, Fumihiko Imamura⁵

1. PASCO Co.Ltd., 2. Fukada Geological Institute, 3. Tohoku, 4. Hanamaki City Museum, 5. IRIDeS, Tohoku Univ.

The coast between Tanabe and Kushimoto, on the west part of the Kii peninsula, was hit by huge tsunamis accompanied with an earthquake belonging to the gigantic Nankai earthquake. Many stone monuments are arranged on this coast for the victims of the 1946 Showa Nankai earthquake-Tsunami. In the Edo period (1602 to 1868 AD) two huge earthquakes were generated; one is the Hoi earthquake of 1707, and the other is the Ansei Nankai earthquake of 1854. Hatori(1980) made a field survey for estimating tsunami heights of those earthquake but his result was a rough estimation of the heights of historical earthquakes. In this study we made database of tsunami damage records on the basis of old documents which were introduced on the material books of the historical earthquakes published by Musha(1941, and 1951), and by Earthquake Research Institute (1983,1987,1989, and 1994). We conducted a field survey in the period from 17th to 20th January, 2017. The left figure shows the tsunami height distribution of the Hoi earthquake of 1707. The maximum tsunami height is recorded at a pass in front of Tokoji Temple in Shinjo area, Tanabe city, where two streams of run-up tsunami waves were jointed at the summit of the pass, where the ground height is 12.8 meters above the mean sea level. The residential area of Takai in Tonda area in Shirahama Town is located on a plateau of the height of 6.9 meters and an old document says that all houses were swept away there, which shows that the water thickness were 3.0 meters or more, so the tsunami inundation height was 9.9 meters or more. A stone monument in the cemetery of Manpukuji Temple in Susami town was made as a monument for the victims of the Hoi Tsunami in 1723 AD. On this stone monument it is recorded that the total number of the victims of the Hoi tsunami was 134 in this town.

Acknowledgement: This study was achieved as a part of the commissioned research named “Study on the historical tsunamis in the Pacific coast of Japan (2016)” on disaster prevention for nuclear facilities proposed by the Nuclear Regulation Authority, Japan.

Keywords: Hoi Earthquake-Tsunami, Ansei Nankai Earthquake-Tsunami, Historical earthquakes, Tsunami disaster

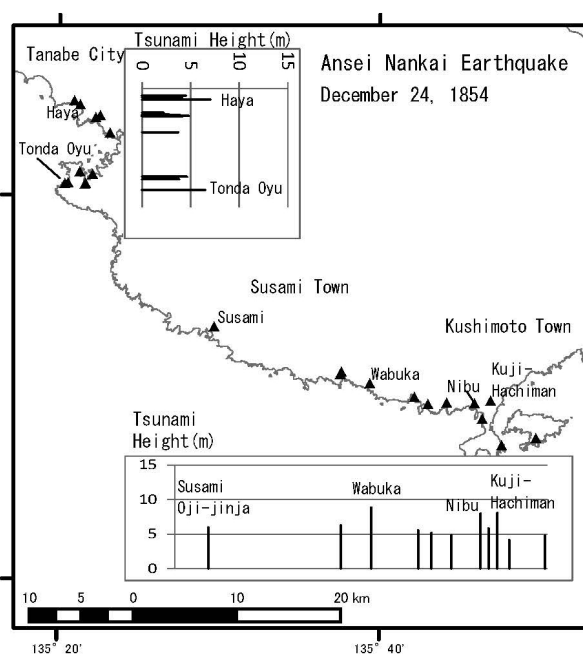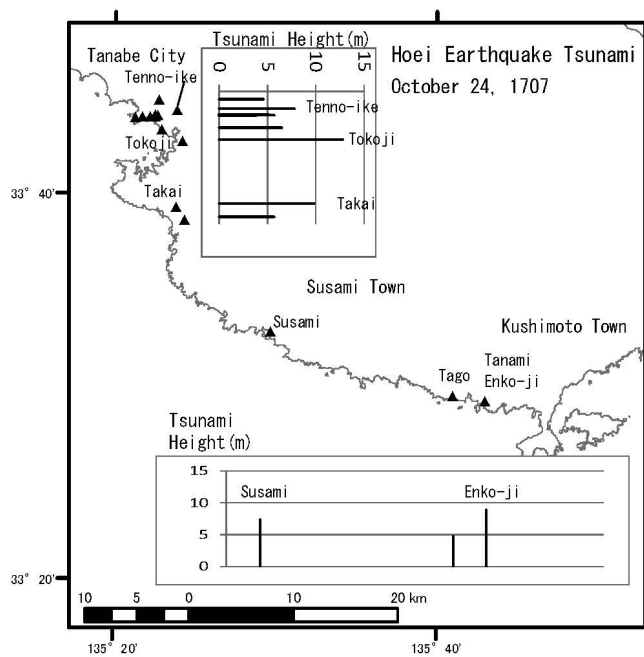

A Characterized Fault Model estimated from the Tsunami height of the 2003 Tokachi-oki earthquake

*Kito Tadashi¹, Kenji Hirata², Hiroyuki Fujiwara², Masaki Osada², Nemoto Makoto¹, Hisanori Matsuyama¹, Yasuhiro Murata³, Shin'ichi Akiyama⁴

1. OYO Corporation, 2. NIED, 3. KOKUSAIKOGYO CO., LTD, 4. CTC (ITOCHU Techno-Solutions Corporation)

1. Purpose

NIED (National Research Institute for Earth Science and Disaster Prevention) has been conducting the project on the probabilistic tsunami hazard assessment along the coastline in Japan (Fujiwara et al., 2013, JpGU). We have already constructed characterized fault models and conducted probabilistic tsunami hazard assessment using the tsunami heights estimated by tsunami simulations along the Japan trench, Nankai trough and Sagami trough. We are currently conducting probabilistic tsunami hazard assessment along the Kuril trench. To carry out such an assessment, the framework of characterized fault models is needed to be effective. This can be verified if we confirm that a tuned characterized fault model reasonably reproduces the tsunami trace heights of historical earthquakes. To verify the validity and effectiveness of characterized fault models along the Kuril trench, we construct characterized fault models to reasonably explain the tsunami trace heights of the 2003 Tokachi-oki earthquake based on the tsunami receipt issued by the Headquarters for Earthquake Research Promotion (2017).

2. Method

Element faults with approximately 5km in length and 5km in width are configured on the surface of the Pacific plate beneath the Kuril trench to take account of fault slip on the curved surface of the subducting plate. The slip angle of each element fault is determined based on the direction of the relative motion between the Pacific plate and the North American plate. The source area is determined by delineating the source area of the 2003 Tokachi-oki earthquake shown in the long-term evaluation by the Headquarters for Earthquake Research Promotion (2004). A large slip area with 2 times of average slip amount is placed within the source area. The moment magnitude of fault models is assumed to be Mw8.3 according to the long-term evaluation, and the average slip amount was calculated using the corresponding seismic moment. These fault parameters are fixed, and the location, the aspect ratio and the area ratio of the large slip area are assumed to be unknown parameters, which are defined by the followings.

1. 3 large slip areas along the trench and 3 other ones in the direction perpendicular to the trench are placed around the area where relatively large slip of the 2003 Tokachi-oki earthquake is estimated by Tanioka et al.(2004) and Yamanaka and Kikuchi (2003).
2. The aspect ratios of the large slip areas are set to 0.9, 1.0 and 1.1 based on the slip distribution of the 2003 Tokachi-oki earthquake estimated by Tanioka et al.(2004) and Yamanaka and Kikuchi (2003).
3. The area ratios of the large slip areas with respect to the source area are set to 25%, 30% and 35% based on the slip distribution of the 2003 Tokachi-oki earthquake estimated by Tanioka et al.(2004) and Yamanaka and Kikuchi (2003).

Forward modeling is performed for the 81 characterized fault models in total.

3. Evaluation of the reproducibility of the models

The residual sum of squares is used to evaluate the reproducibility of the models. The tsunami height data of the 2003 Tokachi-oki earthquake were obtained from Japan Tsunami Trace database (Tohoku University, <http://irides.tohoku.ac.jp/project/tsunami-db.html>) and selected according to Korenaga et al. (2013). The model with the smallest residual sum of squares is located at the western edge of the source

area. The area ratio of the large slip area of the selected model is 25% and the aspect ratio is 0.9. The geometric average K and geometric standard deviation κ for the selected model are estimated to be 0.98 and 1.48, respectively. The selected model is considered to be a characterized fault model to reasonably explain the tsunami trace heights of the 2003 Tokachi-oki earthquake. To verify the effectiveness of characterized fault models, we are planning to construct characterized fault models to reproduce tsunami trace heights of historical earthquakes in the various regions around Japan.

This study is conducted as a part of the research project “Research on the hazard risk assessment for natural disaster” at NIED.

Keywords: 2003 Tokachi-oki earthquake, Characterized fault model, Long-term evaluation

Observation of Coupled Seiche System in Ise Bay and Mikawa Bay by HF Radar

*Yu Toguchi¹, Satoshi Fujii², Hirofumi Hinata³

1. Graduate School of Engineering and Science, University of the Ryukyus, 2. Department of Electrical and Electronics Engineering, University of the Ryukyus, 3. Department of Civil and Environmental Engineering, Ehime University

The tsunami waves and the seiches generated by the “The 2011 off the Pacific coast of Tohoku Earth quake” were observed by the oceanographic radars in Ise Bay and Mikawa Bay. In the present circumstances, stationary measurements on coastal region and offshore region are main streams for tsunami measurement. These can only observe just one point on oceans. However, oceanographic radars can measure current velocities widely as well as the velocities generated by tsunami arrivals and natural oscillations. Thus, it is significantly useful tool for tsunami prevention system. The seiches are bay or harbor resonant oscillations in an enclosed basin, which are generated by direct external force from open ocean such as tsunamis. These produce anomalous tide level and swift currents. Thus, the observation of seiches is of extreme importance for the disaster prevention around the coastal regions.

We used the data observed by each two oceanographic radars installed in Nabeta (NABE) and Tsumatsuzaka (MATU) in Ise Bay, and MITO and MAGUSA in Mikawa Bay. We also examined the data obtained by tide gauge records to compare the effect of tsunami with the radar observations. To analyze the total velocity of the currents generated by the seiche, we used an Empirical Orthogonal Function (EOF). To verify the physical property of the results of the EOF analysis, we calculated the natural oscillation modes by the numerical model proposed by Loomis. The results of EOF analysis showed that the oscillation modes of 120-140 and 60-80 minutes period bands were distributed widely, whereas the oscillation mode of 30-40 minutes period band was distributed locally in Ise Bay. The EOF spatial patterns of each period were good agreement with numerical models.

At the time of the arrival of the tsunami, the sea surface height of the inner part of Mikawa Bay and Ise Bay oscillated alternately. Because Mikawa bay is coupled with Ise Bay on the entrance of the bay, there are some oscillations such as two simple coupled pendulums connected by a spring. In addition to the oscillation modes of Ise Bay, we will show the pendulum system in detail.

Keywords: Seiche, Ise Bay, HF Radar

Analysis of the November 2016 Fukushima tsunami using the slip distribution of the seismic source process analysis

*Kenji Nakata¹, Kenichi Fujita¹, Yasuhiro Yoshida², Yutaka Hayashi¹, Hiroaki Tsushima¹, Akio Katsumata¹

1. Meteorological Research Institute, Japan Meteorological Agency, 2. Meteorological College, Japan Meteorological Agency

An earthquake of Mw 6.9 occurred off Fukushima Prefecture on November 22, 2016. Tsunami was observed in a wide area from Hokkaido to Wakayama, especially tsunami amplitude of 1.4m was measured at Sendai port tide gage station (JMA, 2016).

In this study, the results of the seismic source process analysis are used for the evaluation of the tsunami. First, the slip distribution on the small fault is obtained by the source process analysis. After that, the crustal deformation of the seabed surface due to each fault is calculated. The crustal deformation is given as sea level, and the tsunami is calculated. Here, it is assumed that the sea level is instantaneously given at the occurrence time of the earthquake. The mesh size of the ocean bottom topography data is set to 50 m at the minimum. The seismic moments due to the small faults are added together, and Mw is 7.2 (when the rigidity $\mu = 30\text{GPa}$) and Mw 7.0 ($\mu = 15\text{GPa}$).

The coastal tsunami waveform obtained by calculation well demonstrated the shape and amplitude of the short period waves of the observed tsunami. To adjust the phases of the first wave and the reflected wave obtained by the calculation to that of the observation, the initial water level was translated in the southwest direction. As a result, the wave source of the tsunami became closer to the aftershock distribution, and it gave a result that very well matches the coastal tsunami observation record.

Furthermore, we investigated what would happen if a fault that fits the optimum initial water level is given by a single uniform fault. As a result of preliminary, it was found that it was necessary to set a fault which was considerably out of the scaling law of Mw 6.9, the fault length was 20 km, the width was 15 km, and the slip amount was 6.3 m. Here, the rigidity ratio was assumed to be 15 GPa. Such a large amount of slip appears locally in the slip distribution of the seismic source process analysis and it is considered to be within a reasonable range.

In case of an earthquake deviating from the scaling law of the fault size and slip amount due to magnitude like this time, the information of the wave source of the tsunami by the source process analysis is effective. In addition, when analyzing immediately, in order to deal with the uncertainty of the horizontal position, it is conceivable that a plurality of calculations allowing some error in the grid search are performed and the result is taken out.

Acknowledgment: TUNAMI-N2 was used for tsunami numerical analysis.

Keywords: November 2016 Fukushima tsunami, source process analysis


The Development of Volume Flux Method and the Application on the 1661 Luermen event

*Tso-Ren Wu¹, Han Wu¹, Shun-Kai Hu¹, Yu-Lin Tsai¹

1. National Central University

In 1661, Chinese navy led by General Koxinga at the end of Ming Dynasty had a naval battle against the Netherlands. This battle was not only the first official sea warfare that China confronted the Western world, but also the only naval battle won by Chinese Navy so far. This case was significant because it altered the fate of Taiwan until today. One of the critical points that General Zheng won the battle was entering Lakjemuysse bay unexpectedly. Luermen bay was and is an extremely shallow bay with a 2.1 m maximum water depth during the high tide, which was not possible for a fleet of 20,000 marines to cross. Hence, no defense was deployed from the Netherlands side. However, plenty of historical literatures mentioned a strange phenomenon that helped Chinese warships entered the Luermen bay, the rise of water level. In this study, we will discuss the possible causes that might rise the water level, e.g. Tsunami, storm surge, and high tide. We analyzed it based on the knowledge of hydrodynamics. We performed the newly developed Volume Flux Method (VFM) for finding the potential tsunami sources, and the COMCOT tsunami model was adopted for the nonlinear scenario simulations, associated with the high resolution bathymetry data. Both earthquake and mudslide tsunamis were inspected. Other than that, we also collected the information of tide and weather for identifying the effects from high tide and storm surge. After the thorough study, a scenario that satisfies most of the descriptions in the historical literatures will be presented. The results will explain the cause of mysterious event that changed the destiny of Taiwan.

Keywords: Mudslide Tsunami, Storm Suge, volume flux method (VFM), COMCOT, 1661 Luermen naval battle

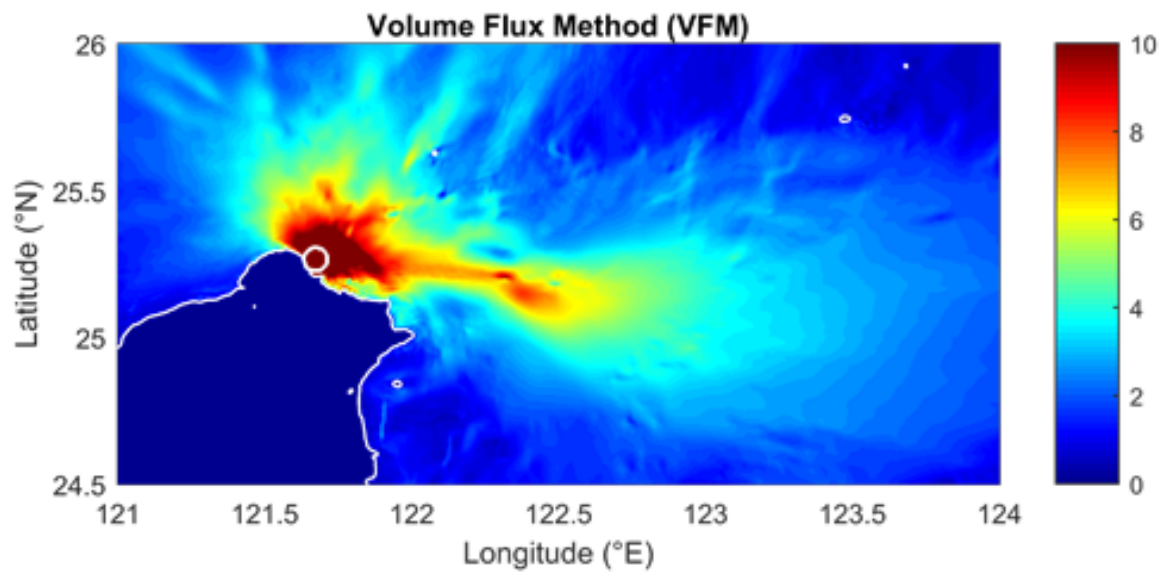

Processing Real Time Tsunami Potential of Earthquakes using Early-est

*Mehmet YILMAZER¹, Fatih TURHAN¹, Ocal NECMIOGLU¹, Aysegul KOSEOGLU¹

1. Bogazici University Kandilli Observatory and Earthquake Research Institute

In this study current status and results of the Processing Real Time Tsunami Potential of Earthquakes Project (Supported by the Research Fund of the Bogazici University, PN12002) will be presented. Bogazici University - Kandilli Observatory and Earthquake Research Institute –Regional Earthquake and Tsunami Monitoring Center (KOERI-RETMC) is providing tsunami-warning services in the Eastern Mediterranean, Aegean and Black Seas since 1 July 2012 and has been accredited as a Tsunami Service Provider of ICG/NEAMTWS at its 13th session during 26-28 September 2016 in Bucharest, Romania. The main purpose of the this project is evaluation of usefulness of the Early-Est method (Lomax and Michelini) by the RETMC for the rapid and robust assessment of the tsunami potential of an earthquake for early warning and emergency response depending both on moment magnitude and rupture duration of the earthquake based on $T_d T_0$ and $T_d T_{50} E_x$ discriminants. Both real time data and the off-line earthquake waveform data are being processed using Early-est software package. In the initial phase of the project, the waveform data belonging earthquakes that have M6.5 available from all over the world are being archived and processed. So far, approximately 1000 events have been processed and prepared for statistical analysis. Next step would be the analysis of the relation between theoretical assumptions and processing results in terms of moment magnitude and tsunami potential. At the end of the study, performance of the method will be investigated using real time processing results are collected during the project period. We would like to thank Dr. Anthony Lomax for his cooperation and support in the operationalization of Early-Est in RETMC.

Keywords: Tsunami, Rupture Duration, Early-Est, Tsunami Potential Discriminant

Beamforming detection of possible tsunami forerunners at the Korean coast

*Satbyul Kim¹, Emile Okal², Tae-Seob Kang¹

1. Division of Earth Environmental System Science, Pukyong National University, 2. Department of Earth and Planetary Sciences, Northwestern University

Korea is mostly surrounded by sea and the west and south offshore have shallow depth which is 51 m and 71 m of the average depth respectively. The eastern sea of Korea has relatively deeper average depth (about 1,497 m) as well as it increases rapidly along the coast, so the sea between the eastern Korean Peninsula and the Japanese Arc is such as a huge bath. When the 2011 Tohoku earthquake occurred, it not only generated a devastating tsunami in the Sanriku region, but also caused small waves in the back-arc region of Japan. They were recorded at several tidal gauges along the coast of the East Sea (Japan Sea) (e.g. Shevchenko et al., 2014; Murotani et al., 2015), and Murotani et al. referred to them as “tsunami forerunner”. The Nankai Trough, which is located to the southeast of Japan, is one of the regions capable of producing a large M9 earthquake in the future (Parsons et al. 2012). Therefore, there is a reason to believe that a potential earthquake may cause sea waves originating in southeastern Japan to reach the Korean Peninsula. In this study, we explore whether a large Nankai earthquake will produce a tsunami forerunner in the back-arc region of Japan observable on the Korean coast. We conducted a numerical tsunami simulation to obtain synthetic waveforms using a 1707 Hiei earthquake model proposed by Furumura et al. (2011). We created two virtual arrays, AR01 and AR02, to obtain synthetic waveforms. Array AR01 is located to the southeast of Korea to detect the tsunami forerunner and array AR02 is between southern Korea and Kyushu Island to record the main tsunami coming from the Nankai Trough. We then used beamforming analysis to verify the direction of tsunami arrivals using simulated waveforms at the two arrays. We determine the direction of a tsunami forerunner using waveforms from array AR01. Because the wave front of the tsunami forerunner is parallel to the array, waves generated in the northwest region of Japan show a back-azimuth angle that points in the north and north-northwestern directions. The distribution of beam-energy at array AR02 clearly shows that the main tsunami generated in the Nankai trough comes from the southeast. The beam-forming technique using tsunami waveforms is not able to accurately determine the direction of tsunami forerunner arrivals because the amplitude of the waves is small and the region has strongly varying bathymetry.

Keywords: tsunami, beamforming detection, Korean coast