

## N<sub>2</sub>、O<sub>2</sub>およびArハイドレートの解離熱測定

### Measurement of dissociation heat of N<sub>2</sub>, O<sub>2</sub>, and Ar hydrates

\*八久保 晶弘<sup>1</sup>、柿崎 圭人<sup>1</sup>、大野 浩<sup>1</sup>、竹谷 敏<sup>2</sup>

\*Akihiro Hachikubo<sup>1</sup>, Keito Kakizaki<sup>1</sup>, Hiroshi Ohno<sup>1</sup>, Satoshi Takeya<sup>2</sup>

1. 北見工業大学、2. 産業技術総合研究所

1. Kitami Institute of Technology, 2. National Institute of Advanced Industrial Science and Technology (AIST)

Gas hydrates are crystalline clathrate compounds composed of gas and water molecules, and stable under low temperature and high pressure conditions. Dissociation heats (enthalpies) of gas hydrates have been obtained from their phase diagrams using the Clapeyron equation; however, the application has also been difficult due to low quality of the phase data. Dissociation heat of N<sub>2</sub> hydrate was reported by Kang *et al.* (2001), but the value is thought to be overestimated because it is larger than that of methane hydrate. Dissociation heat of O<sub>2</sub> and Ar hydrates have not reported yet. In this study, we applied calorimetric technique to determine their dissociation heat.

The samples of gas hydrates were synthesized from fine ice powder and guest gases at 273.2 K and the pressure condition of 20MPa (N<sub>2</sub>) and 16MPa (O<sub>2</sub> and Ar). The ice powder started to melt and formed these gas hydrates. Approximately 1 g of each hydrate sample was set in a pressure cell specially designed for a Tian-Calvet type heat-flow calorimeter, and its dissociation monitored. The experimental setup and technique were the same as the one that was used previously by Hachikubo *et al.* (2009; 2012).

Dissociation heats of N<sub>2</sub>, O<sub>2</sub>, and Ar hydrates from hydrate to gas and ice are 12.8±0.2 [kJ mol<sup>-1</sup>], 12.6±0.1 [kJ mol<sup>-1</sup>], and 13.2±0.1 [kJ mol<sup>-1</sup>], respectively. Yoon *et al.* (2003) reported that dissociation heats of N<sub>2</sub> and O<sub>2</sub> hydrates are 12.18 [kJ mol<sup>-1</sup>] and 11.52 [kJ mol<sup>-1</sup>], respectively, using the Clausius-Clapeyron equation. Therefore, our data are several percent smaller than the previous report.

#### References

Kang S-P, Lee H (2001) Enthalpies of dissociation of clathrate hydrates of carbon dioxide, nitrogen, (carbon dioxide + nitrogen), and (carbon dioxide + nitrogen + tetrahydrofuran). *J Chem Thermodyn* **33**: 513-521.

Hachikubo A, Kida M, Okuda M, Sakagami H, Shoji H (2009) Dissociation heat of mixed-gas hydrate composed of methane and ethane. *Seppyo* **71**(5): 341-351.

Hachikubo A, Khlystov O, Kida M, Sakagami H, Minami H, Yamashita S, Takahashi N, Shoji H, Kalmychkov G, Poort J (2012) Raman spectroscopic and calorimetric observations on natural gas hydrates with cubic structures I and II obtained from Lake Baikal. *Geo-Mar Lett* **32**: 419-426.

Yoon J-H, Yamamoto Y, Komai T, Haneda H, Kawamura T (2003) Rigorous approach to the prediction of the heat of dissociation of gas hydrates. *Ind Eng Chem Res* **42**: 1111-1114.

キーワード：ガスハイドレート、解離熱、水和数、熱量測定

Keywords: gas hydrate, dissociation heat, hydration number, calorimetry

## 窒素ハイドレート生成時のゲストガス安定同位体分別過程 Isotopic fractionation process of guest gas at the formation of nitrogen hydrate

小関 貴弘<sup>1</sup>、\*八久保 晶弘<sup>1</sup>、大野 浩<sup>1</sup>、竹谷 敏<sup>2</sup>

Takahiro Ozeki<sup>1</sup>, \*Akihiro Hachikubo<sup>1</sup>, Hiroshi Ohno<sup>1</sup>, Satoshi Takeya<sup>2</sup>

1. 北見工業大学、2. 産業技術総合研究所

1. Kitami Institute of Technology, 2. National Institute of Advanced Industrial Science and Technology (AIST)

Gas hydrates are crystalline clathrate compounds composed of water and gas molecules that are stable at low temperature, high partial pressure of each gas component, and high gas concentration. Nitrogen hydrate exists in Greenland and Antarctic ice sheets as an air (N<sub>2</sub> and O<sub>2</sub> mixed gas) hydrate. Recently, existence of nitrogen hydrate has been expected in the Titan (the largest moon of the Saturn). On the other hand, isotopic fractionation of carbon and hydrogen in methane and ethane during the formation of gas hydrates was reported by Hachikubo *et al.* (2007). In this study, we report isotopic fractionation of nitrogen during the formation of nitrogen hydrate. The samples of nitrogen hydrate were experimentally prepared in a pressure cell and isotopic compositions of both residual and hydrate-bound gases were measured.  $\delta^{15}\text{N}$  of hydrate-bound molecules was about 0.2 permil higher than that of residual gas molecules in the formation processes. Temperature effect on the isotopic fractionation was small between 226K and 273K.

### Reference

Hachikubo A, Kosaka T, Kida M, Krylov A, Sakagami H, Minami H, Takahashi N, Shoji H (2007) Isotopic fractionation of methane and ethane hydrates between gas and hydrate phases. *Geophys Res Lett* **34**: L21502. doi:10.1029/2007GL030557

キーワード：ガスハイドレート、安定同位体、窒素

Keywords: gas hydrate, stable isotope, nitrogen

## メタン・硫化水素系混合ガスハイドレートのラマン分光分析 Raman spectroscopic analysis of mixed-gas (methane and hydrogen sulfide) hydrate

柿崎 圭人<sup>1</sup>、\*八久保 晶弘<sup>1</sup>、竹谷 敏<sup>2</sup>

Keito Kakizaki<sup>1</sup>, \*Akihiro Hachikubo<sup>1</sup>, Satoshi Takeya<sup>2</sup>

1. 北見工業大学、2. 産業技術総合研究所

1. Kitami Institute of Technology, 2. National Institute of Advanced Industrial Science and Technology (AIST)

Natural gas hydrates in subsurface marine sediment encage hydrogen sulfide. Microbial community produces hydrogen sulfide from methane ascending from deeper sediment layer and sulfate supplied from sea water. The existence of hydrogen sulfide decreases the equilibrium pressure of natural gas hydrate. Therefore, near-surface gas hydrates might exist in shallower area (i.e. less than 300m below sea level). On the other hand, hydration number decides the amount of gas in an unit volume/weight of crystal. In the case of ideal full-occupation of hydrate cages, the value of hydration number is 5.75 (Sloan and Koh, 2008). However, actual hydration number is estimated to be around 6, because small amount of empty cages decrease the free energy and stabilize the crystal. The cage occupancies and the hydration numbers can be estimated from these Raman peak intensities using a statistical thermodynamic model (Sum et al., 1997); however, the effect of hydrogen sulfide on the estimation has not examined yet. In this study, we synthesized methane and hydrogen sulfide mixed-gas hydrate and obtained their Raman spectra.

The mixed-gas hydrates were synthesized in a pressure cell, and retrieved the crystals at the temperature of liquid nitrogen. Hydrate-bound and residual gases were also sampled and their gas compositions were determined using gas chromatograph. Raman spectra were obtained at 123 K in the range 2,800-3,000  $\text{cm}^{-1}$  and 2,500-2,700  $\text{cm}^{-1}$  for the C-H stretching peaks of methane and the S-H stretching peaks of hydrogen sulfide, respectively. The Raman peaks were fitted using a Voigt function to obtain the integrated intensities of the two peaks corresponding to methane and hydrogen sulfide encaged in the large and small cages of the cubic structure I.

The methane peak ratio of large to small cages first increased with the composition of hydrogen sulfide (up to several percent), and then decreased and converged with the number of 3.2. On the contrary, The hydrogen sulfide peak ratio distributed from 2.4 to 2.8, increased with the composition of hydrogen sulfide, and then converged with the number of 3.2. These results suggest that molecules of hydrogen sulfide prefer to be encaged in small cages, although the molecular diameter of hydrogen sulfide is larger than that of methane.

Sloan and Koh (2008) Clathrate Hydrates of Natural Gases, 3rd ed., CRC Press: Boca Raton, FL, USA

Sum et al. (1997) Measurement of clathrate hydrates via Raman spectroscopy. J Phys Chem B 101: 7371-7377.

キーワード：ガスハイドレート、硫化水素、ラマン分光分析

Keywords: gas hydrate, hydrogen sulfide, Raman spectroscopic analysis

## Gas hydrate dissociation behavior from temperature monitoring data

\*Koji Yamamoto<sup>1</sup>, Xiaoxing Wang<sup>2</sup>, Takayuki Kanno<sup>2</sup>, Xiaowei Wang<sup>3</sup>

1. Japan Oil, Gas, and Metals National Corporation, 2. Schlumberger K. K., 3. Baker Hughes Inc.


Because the gas hydrate dissociation is an endothermic process, temperature measurement is an important way to know the response of gas hydrate reservoir to the application of some gas production techniques. Furthermore, a heat source, and how efficiently the heat is supplied from the formation are critical knowledge to evaluate effectiveness of the depressurization method as a practical gas production technique that depends on natural heat supply from formations.

The program of the 2013 first offshore production test of methane hydrate in the Eastern Nankai Trough included temperature monitoring in the production hole (AT1-P) and monitoring holes (AT1-MT1/MC). In all wells, some degree of temperature drop was observed.

During the six-days of the depressurization operation, maximum 5 K and 0.5 K in P and MT1 wells respectively. The vertical profiles of the temperature drop show high degree of heterogeneity, and the dissociation process reached in a localized region of the monitoring well. The water production zone in the production well was also concentrated at a specific depth.

Rapid temperature changes were observed in every well when the sand production event happened and terminated the flow in the seventh day of the test. The data show that the sanding occurred at a specific depth with strong water flow, and effect of it reached the monitoring hole location of 20 to 30 m far away.

Keywords: Gas hydrate, Thermal behavior, Depressurization, Downhole measurement

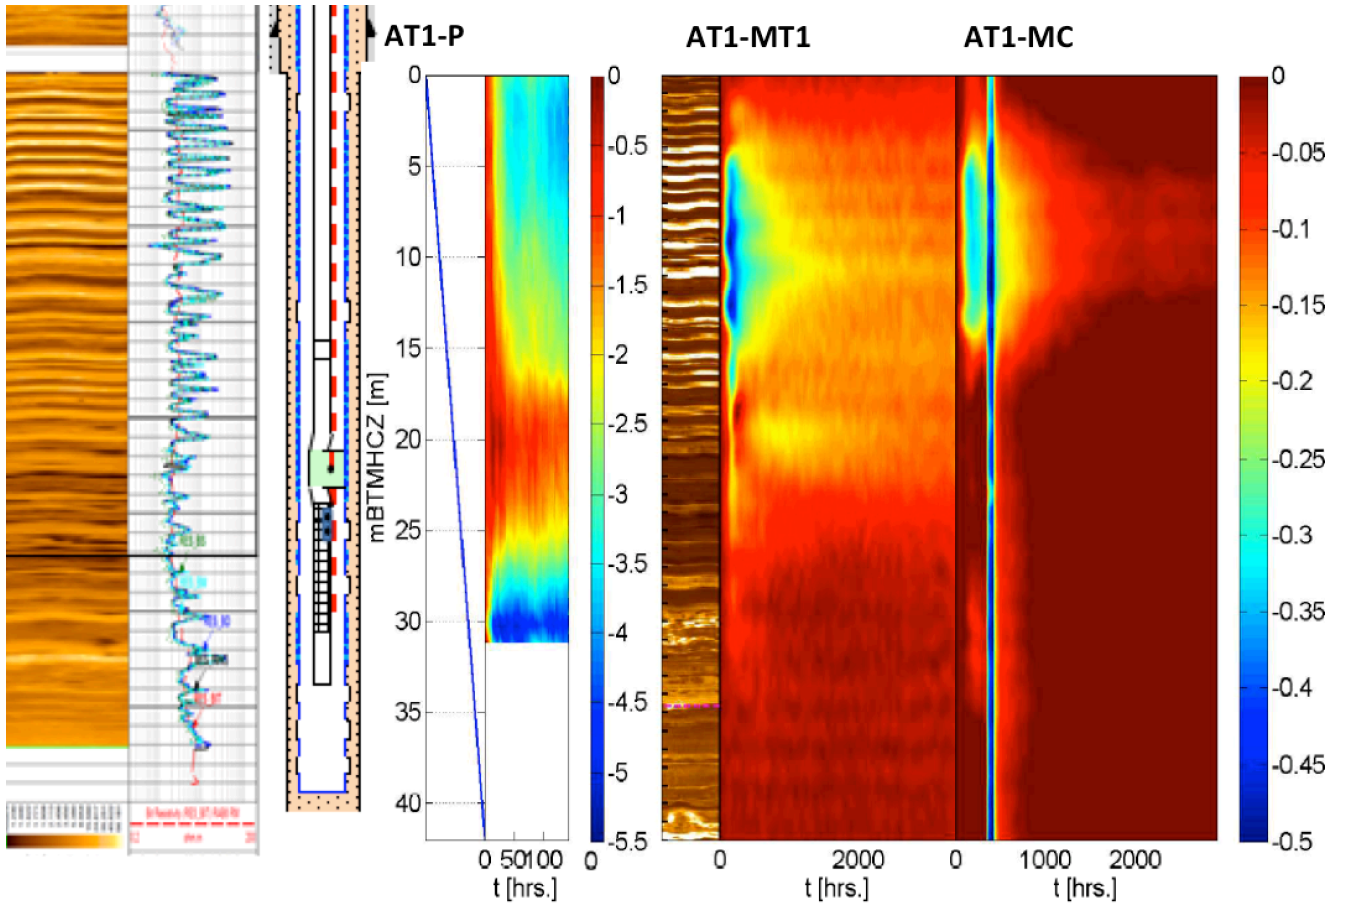

## 4-Component seismic survey in the second offshore production test of methane hydrate

\*小林 稔明<sup>1</sup>、佐伯 龍男<sup>1</sup>、藤井 哲哉<sup>1</sup>、稲盛 隆穂<sup>2</sup>、寺西 陽祐<sup>2</sup>、高橋 浩央<sup>3</sup>、小林 史英<sup>4</sup>

\*Toshiaki Kobayashi<sup>1</sup>, Tatsuo Saeki<sup>1</sup>, Tetsuya Fujii<sup>1</sup>, Takao Inamori<sup>2</sup>, Yousuke Teranishi<sup>2</sup>, Hiroo Takahashi<sup>3</sup>, Fumihide Kobayashi<sup>4</sup>

1. 独立行政法人石油天然ガス・金属鉱物資源機構、2. 株式会社地球科学総合研究所、3. 株式会社オーシーシー、4. 国際ケーブル・シップ株式会社

1. Japan Oil, Gas and Metals National Corporation, 2. JGI, Inc., 3. OCC Corporation, 4. Kokusai Cable Ship Co., Ltd.

JOGMEC carries out 4-component seismic surveys before and after an offshore production test and grasps a change in physical properties by dissociation of methane hydrate (MH) three-dimensionally and evaluates MH dissociation behavior from those data comparisons.

The 4-component seismic survey data was acquired three times in August, 2012 before the production test, in April and August, 2013 after the test in the first offshore production test. The result could show the change in physical properties by the data comparison between before and after the test. On the other hand, improvements of quality of acquired data such as a design of receiver and source points, accuracy of source points and cause of a change in physical properties by data comparison between before and after the test were mentioned as a problem. So, the problems experienced in the first production test were improved for a data acquisition of the second offshore production test. A preliminary simulation was carried out. As a result, it was confirmed that the improvement of the resolution of MH around the production well was possible by the following matters;

- ・ One OBC (Ocean Bottom Cable) would be manufactured additionally and two OBCs would be used.
- ・ Two OBCs would be set in east and west so as to insert the production well. Those direction would be made north and south.
- ・ Source points would be arranged in the range of 4 km north and south and 3 km east and west centering on the production well.
- ・ In order to improve the accuracy of the source points, GPS antenna would be installed at the center of the float hanging an air-gun.

So, one OBC was produced additionally in FY2016 and the 4-component seismic survey data before the test was acquired by the specifications according to the results of the simulation around the production well of the second offshore production test in August, 2016.

From the comparison of the profiles between the acquired data and the data of Daini Atsumi Knol in the geophysical survey project in 'Tokaioki to Kumanonada 'took in 2002, it could be confirmed that the resolution in the MH reservoir, below BSR (Bottom Simulating Reflector), and between the sea bed and the top of the MH reservoir was improved. Therefore, more accurate reservoir structure grasp and the evaluation of MH dissociation behavior by comparing to the data after the test will be expected.

This study shows an example of interpretation of the profile before the test.

This study is performing as part of resources assessment of MHs offshore surrounding Japan that JOGMEC is conducting as a member of a research group for resources assessment of Research Consortium for Methane Hydrate Resources in Japan (MH21).

キーワード：4成分地震探査、海底受振ケーブル、メタンハイドレート

Keywords: 4-Component seismic survey, OBC, Methane Hydrate

# Methane Hydrate Potential of the Hidaka Trough, Offshore Japan

\*藤本 暁<sup>1</sup>、藤井 哲哉<sup>1</sup>

\*AKIRA FUJIMOTO<sup>1</sup>, Tetsuya Fujii<sup>1</sup>

1. 独立行政法人石油天然ガス・金属鉱物資源機構

1. Japan Oil, Gas and Metals National Corporation

JOGMEC, as a member of research group for resources assessment of Research Consortium for Methane Hydrate Resources in Japan (MH21), has been conducting resources assessment of methane hydrate (MH) offshore surrounding Japan.

This study aims to investigate the gas hydrate potential by the analysis of the 3D seismic reflection survey. In terms of resources assessment, it is important to understand the character and distribution of the BSR (bottom simulated reflector), sand distribution, high velocity anomaly and strong amplitudes above BSR to interpret the methane hydrate concentrated zones (MHCZ) quantitatively.

The 3D seismic reflection data (4800 m streamer, 384 channels, 48 fold) acquired in 2013 and 2014 by geophysical vessel 'Shigen', which is owned by Agency for Natural Resources and Energy. We investigated the potential of methane hydrate as resources in the Hidaka trough by the 3D data in Hidaka trough which located in the south Hokkaido government, Japan.

The BSR exists in quaternary sediment and extends over a broad area of the Hidaka trough. Amplitudes of BSR are various and some of them associate with amplitude versus offset (AVO) anomaly. Quaternary sediment is interpreted as hemipelagic and gravity flow deposit. Low amplitude anomaly below BSR associated with low interval velocity and pull down effect are observed as large gas chimney.

Topographical anomalies like small diapir with high amplitude indicates hydrate mounds on the water bottom. They suggest that hydrocarbon matured and generated in deep area, then it migrated and trapped to shallow sediment through several faults caused by tectonics in the foreland basin. It is obvious that hydrate in the basin are closely related to the petroleum system.

Even the focused area has not been drilled, the analysis of 3D seismic data and its interpretations are useful to understand thermal structure, fluid migration, and estimation of the MHCZ in the basin.

キーワード：砂層型メタンハイドレート、反射法地震探査

Keywords: Methane Hydrate, Seismic Reflection

## 間隙水及びガスの地球化学的特徴から見る日高トラフのガストムニー内でのメタンの生成・消費過程

### Methanogenesis and methane consumption within the gas chimney structure in Hidaka Trough, offshore Hokkaido: implications from pore water and gas geochemistry

\*間々田 剛志<sup>1</sup>、中島 亮佑<sup>1</sup>、戸丸 仁<sup>1</sup>、松本 良<sup>2</sup>

\*Mamata Tsuyoshi<sup>1</sup>, Ryosuke Nakajima<sup>1</sup>, Hitoshi Tomaru<sup>1</sup>, Ryo Matsumoto<sup>2</sup>

1. 千葉大学大学院理学研究科、2. 明治大学ガスハイドレート研究所

1. Department of Earth Sciences, Chiba University, 2. Gas Hydrate Laboratory, Meiji University

日高トラフには表層型メタンハイドレート胚胎域に特徴的なガストムニー構造やメタンブルーム、脱ガス構造などが確認されている。堆積物中のガストムニー構造や海中でのガスブルームの形成には堆積物深部からのメタンの供給が重要であり、そのメタンは海底表層堆積物の微生物が関与する化学反応のエネルギー源となっている。本研究では日高トラフのガストムニー構造を伴うマウンド上で採取した堆積物の間隙水溶存イオンや溶存ガスの炭化水素組成、炭素安定同位体を分析し、特にガストムニー構造内で起きているメタンの生成と消費過程に着目し、海底表層堆積物内の化学的環境を考察した。

サブボトムプロファイラーで顕著なガストムニーが確認された地点の堆積物は非常に浅い場所硫酸-メタン境界 (Sulfate-Methane Interface; SMI) が存在し、還元的な環境が海底付近まで広がっていることが明らかになった。SMI周辺では溶存無機炭素 (DIC) の  $\delta^{13}\text{C}$  が鋭い負のピークを示しており、嫌気性メタン酸化が硫酸イオンの消費において支配的であることがわかった。さらにSMI以深のメタンの  $\delta^{13}\text{C}$  と DIC の  $\delta^{13}\text{C}$ 、 $\text{C1}/(\text{C2}+\text{C3})$  比の比較からは、日高トラフでは熱分解起源メタンと微生物起源のメタンが深部から供給されるとともに、微生物が媒介する  $\text{CO}_2$  還元経路によってメタンが生成されていることが示され、これらの寄与が還元的な環境の形成に大きく影響していると考えられる。

本研究は学術研究調査で得られたデータ及び経済産業省のメタンハイドレート開発促進事業の一部であり、産業技術総合研究所の再委託により実施した調査のデータを使用した。



## 隠岐トラフおよび上越海盆の表層型ガスハイドレート賦存域における表層堆積物中のメタンの挙動

### Geochemistry of methane in surface sediment of shallow gas hydrate deposits in the Oki Trough and Joetsu Basin, Japan Sea

\*亀田 凌平<sup>1</sup>、柿崎 喜宏<sup>2</sup>、戸丸 仁<sup>1</sup>、松本 良<sup>2</sup>

\*Ryohei Kameda<sup>1</sup>, Yoshihiro Kakizaki<sup>2</sup>, Hitoshi Tomaru<sup>1</sup>, Ryo Matsumoto<sup>2</sup>

1. 千葉大学大学院理学研究科、2. 明治大学ガスハイドレート研究所

1. Faculty of Science, Chiba University, 2. Gas Hydrate Laboratory, Meiji University

日本海東縁の上越海盆や隠岐トラフの海底に広く存在が確認されている表層型ガスハイドレートは、ガスチムニーやガス湧出を伴って発達しており、ガスの存在そのものが海底～海底面下の環境を決定づける要因であり、そこで起きている物質の変化の中心となっている。本研究では、2015年に実施された表層型ガスハイドレートを対象として掘削航海（PS15）で採取された間隙水中の硫酸イオン濃度、溶存ガス組成、溶存ガスの炭素同位体組成比から、特に硫酸-メタン境界（SMI）周辺での生物地球化学的反応について、海域ごとの違いを明らかにした。

表層型ガスハイドレートが胚胎するサイトの多くでは、SMIは隠岐トラフより上越海盆の方が浅く、基本的なガスの供給量が上越海盆のほうが高いことを反映している。深部のメタンの $\delta^{13}\text{C}$ からは、上越海盆のほうが熱分解起源ガスを相対的に多く含むことが明らかになった。SMI周辺ではメタンの $\delta^{13}\text{C}$ の負異常が見られ、特に上越海盆でのメタンの $\delta^{13}\text{C}$ の変動幅が大きく、SMI周辺での嫌氣的メタン酸化と微生物によるメタン生成がともに活発であることを示唆する。また、同時にSMI周辺での $\text{C1}/(\text{C2}+\text{C3})$ の減少は嫌氣的メタン酸化によるものであるが、 $\text{C1}/(\text{C2}+\text{C3})$ の大きさは上越海盆でのメタン量の多さや隠岐トラフでのエタン量の多さを反映しており、ガスの起源の違いが表層堆積物中でのガスの挙動を規制していることが明らかになった。

本研究は経済産業省のメタンハイドレート開発促進事業の一部であり、産業技術総合研究所の再委託により実施した。

キーワード：表層型ガスハイドレート、日本海

Keywords: shallow gas hydrate, Japan Sea

# 山陰沖表層型メタンハイドレート賦存域における海水・間隙水のイオン分析

## Ionic analysis of seawater and interstitial water in methane hydrate fields off Sain'in region of eastern Honshu, Japan

\*茂手木 竜也<sup>1</sup>、石田 直人<sup>1</sup>、海老沼 孝郎<sup>1</sup>

\*Tatsuya Motegi<sup>1</sup>, Naoto Ishida<sup>1</sup>, Takao Ebinuma<sup>1</sup>

1. 国立大学法人鳥取大学大学院工学研究科社会基盤工学専攻メタンハイドレート科学講座

1. Department of Management of Social Systems and Civil Engineering, Graduate School of Engineering, Tottori University

2016年7月にUT16航海において対馬海盆、大和海盆、隠岐トラフで採取した堆積物の間隙水中の溶存イオンを分析することで海底環境を推定した。その結果、調査海域付近のSMI深度が浅いことからメタンフラックスは高いと考えられる。また、メタンハイドレートを直接採取することはできなかったが、塩素イオン濃度が深度方向に上昇したコアもあり、以深部においてハイドレートが形成している可能性がある。

キーワード：表層型メタンハイドレート、間隙水

Keywords: Methane hydrate, Interstitial water

## Geochemical characteristics of hydrocarbon gases within gas chimney structures in the Tsushima Basin and the Oki Trough, Japan Sea

\*井口 彩<sup>1</sup>、戸丸 仁<sup>1</sup>、茂手木 竜也<sup>2</sup>、石田 直人<sup>2</sup>、松本 良<sup>3</sup>

\*Aya Iguchi<sup>1</sup>, Hitoshi Tomaru<sup>1</sup>, Tatsuya Motegi<sup>2</sup>, Naoto Ishida<sup>2</sup>, Ryo Matsumoto<sup>3</sup>

1. 千葉大学、2. 鳥取大学、3. 明治大学

1. Chiba University, 2. Tottori University, 3. Meiji University

Shallow gas hydrate often develops in gas chimney structure with mound/pockmark in the Japan Sea, however, the distribution and reaction of gas inside the chimney is not well understood. We retrieved cores from the well-developed gas chimneys with mound in the southeastern margin of Tsushima Basin and western and eastern Oki Trough to examine the relationship between the geochemical composition of gas and geological structure of gas chimney in the Japan Sea of Southwest Japan.

Concentrations of sulfate dissolved in pore waters rapidly decrease with depth to the sulfate-methane interface (SMI). Contrarily, concentrations of methane increase downward from the depth of the SMI. Methane/ethane ratios are low (<100) above the SMI, however, those rapidly increase below the SMI. This is because methane was preferentially oxidized by the sulfate at the depth of SMI and methane was generated by methanogenic bacteria above the SMI. The highest methane flux is observed in the western Oki Trough area where the thermogenic methane are most dominant below the SMI among sites. This site is characterized by the subsurface structure of a large-scaled gas chimney complex and the thermal gradient as high as 57mK/m, indicating that thermogenic methane is produced in relatively shallow sediment and is efficiently delivered to the near-surface environments.

キーワード：ガスクムニー、炭化水素ガス、日本海

Keywords: gas chimney, hydrocarbon gas, Japan Sea

## 隠岐トラフの海底～表層の生物地球化学的特徴 Biogeochemistry of the seawater-seafloor of Oki trough

\*近田 みのり<sup>1</sup>、戸丸 仁<sup>1</sup>、松本 良<sup>2</sup>

\*Minori Chikada<sup>1</sup>, Hitoshi Tomaru<sup>1</sup>, Ryo Matsumoto<sup>2</sup>

1. 千葉大学理学研究科、2. 明治大学研究知財戦略機構

1. Faculty of Science, Chiba University, 2. Organization for the Strategic Laboratory of Research and Intellectual Properties, Meiji University

Recently, Shallow methane hydrates near the seafloor has been found in the Japan Sea including Oki Trough area, there are also found characteristic submarine topography such as mound/pockmark topography and chimney structure indicate shallow methane hydrates existence. Some of these features often accompany active methane seepage (methane plume), they cause the local changes of biogeochemical environments near the seafloor. Understanding impact shallow methane hydrates work seafloor environment and water column play important role in understanding ocean environment including shallow methane hydrate areas. We have collected seawater and sedimentary pore water samples in order to characterize the biogeochemical processes associated with the high methane delivery and accumulation. The sampling sites are focused in an area where mound-gas chimney structures are well developed at water depths of 760 m, situated in the Oki Trough of the Japan Sea, ~120 km offshore Tottori.

Concentrations of methane dissolved in water columns collected from fixed point observation of offshore Tottori show little variations near the seafloor, but some variations near depth from 200 meters below the sea-level (mbsl) to 400 mbsl. The concentration of methane dissolved in the seawater is high between 200 and 400 mbsl, which may reflect the formation of shell-like methane hydrates on the surface of the methane bubbles near the seafloor and its dissociation around the upper limit of the hydrate stability around 400 mbsl, and subsequent methane release into the seawater.

Concentrations of methane and ethane dissolved in the sedimentary pore waters collected from the same location are relatively high, comparable to the sites in Offshore Joetsu, and the concentration of sulfate rapidly decrease downward to the sulfate-methane interface at <1.5 meters below the seafloor, methane flux is as high as those in the Offshore Joetsu sites. The chemical compositions of these gases are similar to the sites where bacterial mats and carbonates with frequently high concentrations of methane are widely observed in other areas of Oki Trough.

This study was conducted as a part of the shallow methane hydrate exploration project of METI and the expeditions by the Tottori Prefecture Fishery Research Center.

## Investigation of Gas Hydrate Petroleum System in the Miyazaki-oki Forearc Basin, Japan: Preliminary Results

\*Aung Than Tin<sup>1</sup>、和田 直也<sup>2</sup>、田中 誠<sup>1</sup>、小松 侑平<sup>3</sup>、藤井 哲哉<sup>1</sup>、鈴木 清史<sup>1</sup>

\*Aung Than Tin<sup>1</sup>, Naoya Wada<sup>2</sup>, Makoto Tanaka<sup>1</sup>, Yuhei Komatsu<sup>3</sup>, Tetsuya Fujii<sup>1</sup>, Kiyofumi Suzuki<sup>1</sup>

1. 独立行政法人石油天然ガス・金属鉱物資源機構、2. シュルンベルジェK.K.、3. 日本オイルエンジニアリング株式会社  
1. Japan Oil, Gas and Metals National Corporation, 2. Schlumberger K.K., 3. Japan Oil Engineering Co. Ltd.

JOGMEC Methane Hydrate R&D Group has been conducting long-term feasibility studies to assess the available gas hydrate resources in the eastern Nankai Trough, Japan. In order to understand methane generation, migration and accumulation mechanism of gas hydrate, petroleum system modeling (PSM) approach has been utilized for the resource assessment study of the eastern Nankai Trough with provable results. We have applied the modeling approach of the eastern Nankai Trough study in exploring methane hydrate resource assessment of Miyazaki Oki area. This study presents preliminary results of 1D and 2D modeling study of Miyazaki Oki area in investigating sensitivity of lithology and petroleum systems parameters to simulate gas hydrate stability zone (GHSZ) to match with interpreted bottom simulating reflectors (BSRs).

Study area comprises lower Miocene to Pleistocene, deep to shallow marine sedimentary successions of Hyuganada group and Miyazaki Group overlain the basement Shimanto Group. Based on 6 interpreted sequence boundaries from 3D migration seismic and velocity data, construction of a depth 3D framework model is made and distributed by a conceptual submarine fan depositional facies model derived from seismic facies analysis and referring existing geological report. In contrast to the eastern Nankai Trough, the Miyazaki Oki area is lack of calibration data such as pressure and temperature but an exploratory well, Udo Oki-1X, was drilled in the vicinity of the study area. The exploratory well covers most of Miyazaki group where geochemical data, lithology, temperature and vitrinite reflectance are available. Referring to this well, pseudo wells are constructed and sensitivity analyses of lithology and petroleum system parameters are performed. These 1D pseudo well results are applied to 2D modeling and migration simulation. Biogenic methane generation models, Gaussian distribution with peak temperature (model applied in the eastern Nankai Trough models) and Middleburg model based on sedimentation rate, were applied to generate biomethane. PetroMod compaction and permeability curves are assigned for each lithology and hybrid algorithm (combination of Darcy and Flowpath) were used in migration simulation process.

The 2D modeling study has confirmed that lower boundary of GHSZ at pseudo wells has been simulated with sensitivity of a few tens of meters in comparing with interpreted BSR. Furthermore in terms of geological properties, as gas hydrate accumulation increases, trends of reducing effective porosity and permeability are also observed accordingly. Preliminary results of 1D and 2D modeling will be applied to 3D model to investigate migration of biomethane and accumulation of methane hydrate in spatial distribution. As the future works, simulation run of 3D base case model, investigation of structural development and updating facies distribution are planned to perform.

キーワード：宮崎沖、ガスハイドレート安定領域、石油システムモデリング、ピエスアル  
Keywords: Miyazaki Oki, Gas Hydrate Stability Zone, Petroleum System Modeling, BSR