

# The development and application of PPP technology with multi-constellation GNSS

\*Tomoji Takasu<sup>1</sup>

1. Tokyo University of Marine Science and Technology

Precise point positioning (PPP) was introduced in 1990s as an efficient and robust analysis technique for data provided by global navigation satellite system (GNSS) receivers on the ground. PPP can estimate a single receiver position without generating a baseline by fixing orbits and clocks of GNSS satellites to previously determined precise values. PPP can continuously support many users distributed in world-wide without any reference station.

In data processing in PPP, ionospheric effect is usually eliminated by dual-frequency GNSS signals. Tropospheric term is also estimated as an unknown parameter of zenith total delay (ZTD) with an appropriate mapping function. The ZTD can be easily translated to precipitable water vapor (PWV) at the site. GNSS meteorology has consequently been a popular application of PPP.

For the precise satellite orbits and clocks for PPP, International GNSS Service (IGS) has been make great contributions to develop models, algorithms and products since 1990s. Recently IGS has started to provide real-time products in addition to conventional post-processing ones.

In 2011, Japan Aerospace Exploration Agency (JAXA) started to develop a new suite of software to provide precise orbits and clocks of GNSS satellites called MADOCA (multi-GNSS advanced demonstration tool for orbit and clock analysis). MADOCA intends to support all of multi-GNSS-constellation, including GPS, GLONASS, QZSS, Galileo and BeiDou, both for post-processing and real-time mode. For a client of MADOCA-PPP, an extension of RTKLIB, which was a popular open-source GNSS data analysis software developed by the author, is used including ambiguity resolution (AR) feature.

The lecture summarizes development, implementation, evaluation, application and future of MADOCA and RTKLIB.

Keywords: GNSS, PPP, MADOCA, RTKLIB

## Possibility of real-time volcanic plume monitoring using GNSS phase residual and SNR data

\*Yusaku Ohta<sup>1</sup>, Masato Iguchi<sup>2</sup>

1. Research Center for Prediction of Earthquakes and Volcanic Eruptions, Graduate School of Science, Tohoku University, 2. DPRI, Kyoto University

A volcanic explosion is one of the largest energy release phenomena on earth. The ash fall can seriously affect human activity. Thus, the monitoring and prediction of ash fall is very important. Unfortunately, visible light cameras cannot be used to observe eruptions that occur at night and/or when skies are cloudy. Several researchers have investigated the applicability of meteorological radar to the monitoring of the spatiotemporal distribution of eruption clouds, including the ash. Global Navigation Satellite System (GNSS) data provide a useful alternative to meteorological radar for detecting volcanic plumes (e.g. Ohta and Iguchi, 2015).

Recently, the GSI and Tohoku University have developed a nationwide (>1200 sites) real-time crustal deformation monitoring system (REGARD), based on kinematic GNSS analysis, to determine the coseismic fault model of large earthquakes. We will discuss the possibility of the real-time volcanic plume monitoring using GNSS phase residual and SNR data based on the REGARD system.

Keywords: GNSS, volcanic plume, real-time

## GNSS Buoy Array in the Ocean for a Synthetic Geohazards Monitoring System

\*Teruyuki Kato<sup>1</sup>, Yukihiro Terada<sup>2</sup>, Keiichi Tadokoro<sup>3</sup>, Akira Futamura<sup>4</sup>, Morio Toyoshima<sup>5</sup>, Shin-ichi Yamamoto<sup>5</sup>, Mamoru Ishii<sup>5</sup>, Takuya Tsugawa<sup>5</sup>, Michi Nishioka<sup>5</sup>, Kenichi Takizawa<sup>5</sup>, Yoshinori Shoji<sup>6</sup>, Tadahiro Iwasaki<sup>7</sup>, Naoyuki Koshikawa<sup>7</sup>

1. ERI, Univ. Tokyo, 2. Nat. Inst. Tech., Kochi Col., 3. Nagoya Univ., 4. Nat. Inst. Tech., Yuge Col., 5. NICT, 6. MRI, JMA, 7. JAXA

The GNSS buoy system for tsunami early warning has been developed in Japan and has been implemented as the national wave monitoring system since around 2008. Its record was used to update the tsunami warning at the 11 March 2011 Tohoku-oki earthquake and tsunami, Japan. Yet, the buoys are placed only less than 20km from the coast and are not far enough for effective evacuation of people. We are thus trying to improve the system for putting the buoys much farther from the coast. For this purpose, we employ a new PPP-AR analysis algorithm, instead of conventional RTK-GPS, for positioning. In addition, we use a two-way satellite data transmission in contrast with current surface radio system. We have conducted a series of experiments using this new system in 2013 and 2014, using a buoy used for a fish bed located about 40km south of Cape Muroto, Shikoku, southwest Japan. GEONET data were used to obtain precise orbits and clocks of satellites. Then, the information was transferred to the GNSS buoy using a satellite communication system of the Japanese positioning satellite called Michibiki. The received information on the buoy were used for real-time PPP-AR analysis for every second. The obtained buoy position was then transmitted back to the ground base through a geostationary satellite called ETS-VIII. The received data was then disseminated to public through the internet. The success of these experiments indicate that the GNSS buoy can be placed at nearly anywhere in the ocean. Given this success, we made up a new research plan in which we test a commercially available satellite communication system and try to develop a new GPS-acoustic system for monitoring ocean bottom crustal movements nearly continuously. Moreover, we seek for further application of GNSS data for ionospheric and atmospheric researches. Deployment of such GNSS buoy system as an array in a wide ocean will be a powerful tool for monitoring geohazards in the region as well as for other basic research on earth sciences. The new project started in June 2016 and we are now designing a regional GNSS buoy array in the western Pacific. The first newly designed GNSS system is established at another buoy for fish bed, located about 40km south of Cape Ashizuri, southwest Japan. The system is now under testing. We are planning to implement a GNSS-acoustic system for monitoring crustal movements of the sea floor in early 2017 fiscal year at the same buoy.

Keywords: GNSS buoy, geohazard monitoring, tsunami, ocean bottom crustal movement, GNSS meteorology, ionosphere

## Tomographic studies of 3-D structures of daytime mid-latitude sporadic-E patches from a dense GNSS array

\*Kosuke Heki<sup>1</sup>, Ihsan Naufal Muafiry<sup>1</sup>, Jun Maeda<sup>2</sup>

1. Department of Earth and Planetary Sciences, Faculty of Science, Hokkaido University, 2. Library, Hokkaido University

A dense array of continuously operating Global Navigation Satellite System (GNSS) receivers is useful for drawing 2-dimensional maps of sporadic-E (Es) patches. From changes in the ionospheric total electron content (TEC) observed with Japanese GEONET, Maeda and Heki (2014) revealed that Es irregularities often show frontal structure extending predominantly in east-west. We further performed systematic studies of the morphology and dynamics of Es patches analyzing ~70 cases of daytime mid-latitude Es (Maeda and Heki, 2015). In our recent paper (Maeda et al., 2016), we used Interferometric Synthetic Aperture Radar (InSAR) to draw a high resolution of map of an Es irregularity in Southwest Japan. In the GNSS-TEC method, however, we often assume that the irregularities lie at height of ~100 km, and draw 2-D maps using the penetration point of the line-of-sight (LOS) vectors with the thin layer of prescribed height.

Here we try to infer 3-D structure of the Es patches using the 3-D tomography technique of the ionosphere. We set up 2000-3000 small blocks, with dimensions of a few tens of kilometers, covering the altitudes ranging from the D region to the F region, above a certain district of 300 km x 500 km in Japan. We also make a data set composed of slant TEC anomalies with thousands of LOS connecting ground GNSS stations and satellites (we use both GPS and GLONASS) that penetrate these blocks. Finally, we invert for the electron density anomalies of individual blocks, applying a certain continuity constraint. Before an actual tomography with the real data, we performed checkerboard test using synthesized data, and confirmed the resolution of the inversion.

The attached figure shows the map view at the height of 100 km and longitudinal and latitudinal profiles for the northward drifting frontal-shape Es patches that appeared around 4 UT on 22 May, 2010, shown in Figure 1d of Maeda and Heki (2015). We could confirm that the positive electron density anomalies extend east-west at the E region height. One interesting feature is that positive anomalies extend upward and southward. We also studied a case of the southward drifting Es patches that appeared on the Kanto District at around 8 UT on 21 May, 2010 first studied by Maeda and Heki (2014). In that case, we found the Es patch extend upward and northward. The extension direction might be controlled by the drift directions of the Es patches.


### References

- Maeda, J. and K. Heki, Two-dimensional observations of mid-latitude sporadic-E irregularities with a dense GPS array in Japan, *Radio Sci.*, 49, 28-35, doi:10.1002/2013RS005295, 2014.
- Maeda, J. and K. Heki, Morphology and dynamics of daytime mid-latitude sporadic-E patches revealed by GPS total electron content observations in Japan, *Earth Planets Space*, 67, 89, doi:10.1186/s40623-015-0257-4, 2015.
- Maeda, J., T. Suzuki, M. Furuya, and K. Heki, Imaging the midlatitude sporadic-E plasma patches with a coordinated observation of space-borne InSAR and GPS total electron content, *Geophys. Res. Lett.*, 43, 1419–1425, doi:10.1002/2015GL067585, 2016.

Figure caption: Results of 3-D tomography of the Es irregularity patch that appeared around 4:00 UT (13:00 LT) on May 22, 2010 above the Kyushu, Southwest Japan, see Fig.1d of Maeda and Heki (2015).

Frontal shape Es patches extend east-west, and migrate northward. We show the map view at altitude 100 km (a), longitudinal profile (longitude: 130.5E) (b), and latitudinal profile (latitude: 32N) (c). Blocks in red indicate positive electron density anomaly and correspond to the Es patch. In (b), we can see upward continuation of the Es extending southward, reaching the height of 200 km at the southernmost part of the studied region.

Keywords: sporadic-E, GNSS, TEC, 3-D tomography

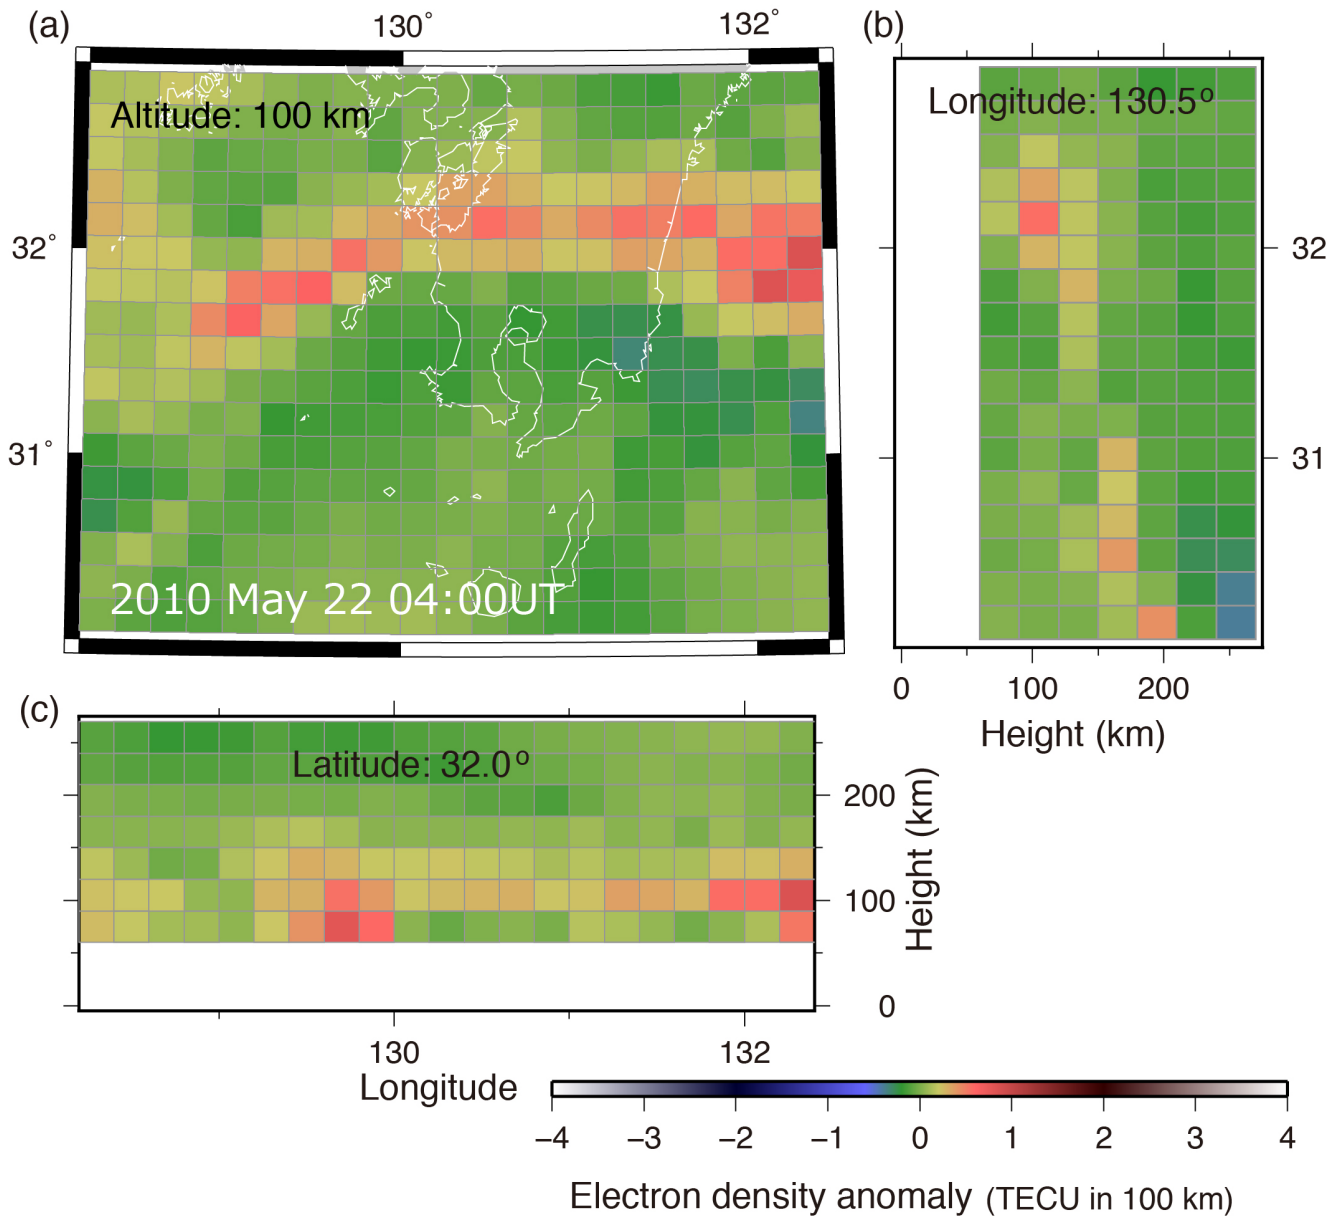

## Extreme water vapor increase as a function of surface temperatures around Japan

\*Mikiko Fujita<sup>1</sup>, Tomonori Sato<sup>2</sup>

1. Japan Agency for Marine-Earth Science and Technology, 2. Hokkaido University

Extreme heavy precipitation is a key phenomenon that impacts on human society and natural environments, which demands our understanding on its behavior under warming climate. Recently, many efforts have been paid for investigating observed extreme precipitation in association with water vapor holdings, which increases with surface air temperature. However, a relationship between atmospheric moisture content and surface air temperature is poorly understood due to the lack of reliable the moisture products for statistical analysis. In this study, we investigate the relationship between atmospheric moisture content and surface air temperature around Japan by using precipitable water vapor (PWV) dataset derived from Global Positioning System satellites that offers high spatial and temporal resolution measurement. We will show the significant PWV increment with surface temperature beyond the Clausius-Clapeyron rate, and the effect of upper air temperature on PWV that can consistently explain the reason for super-CC rate.

Keywords: GPS-PWV, Climate change

## Data Assimilation Experiment of Radio Occultation Refractivity Data by using a Mesoscale LETKF System

\*Hiromu Seko<sup>1</sup>, Toshitaka Tsuda<sup>2</sup>

1. Meteorological Research Institute, 2. Kyoto University

An assimilation method of radio occultation (RO) data for a mesoscale Local Ensemble Transform Kalman Filter (LETKF) (Miyoshi and Aranami, 2006) system has been developed (Seko and Tsuda, 2015). There are the following two difficulties in the assimilation of RO data: (1) An assumption of uniform distribution of refractivity, which is used in the estimation of refractivity profiles at tangent points, is not always valid, and (2) path averaged data is difficult to be assimilated by LETKF system because data assimilation using LETKF is conducted by each grid point. To solve these difficulties, (1) the path averaged refractivity was reproduced from the tangent point data and (2) path- averaged refractivity was divided into the refractivity at grid points around the path by using the statistical data of ensemble forecasts ( ensemble average and spread) obtained by LETKF system. This developed method was applied to the RO data observed on 29 July 2011. The assimilation result of this RO data shows that the sign of the difference between the first guess and observation may be changed when the large mesoscale perturbation of refractivity exists around the tangent points, and that the temperature and water vapor are modified more widely when the path-averaged refractivity is assimilated.

Keywords: GNSS, Data assimilation

# The measurement of the water vapor in the atmosphere using INACORS-BIG, for weather forecasts

\*Syachrul Arief<sup>1</sup>, Kosuke Heki<sup>1</sup>

1. Hokkaido University

Water vapor is an important component of the earth's climate system. Rain is the condensation of water vapor in atmospheric into drops weight enough water to fall and usually arrive on the mainland. The measurement of water vapor in the atmosphere using GPS is an accurate method, who has done some countries. In Indonesia, research with this method is still relatively new. And held still in the area around the island of Java. As research from Realini et al. (2014) proved that the GPS meteorology technique is useful to investigate severe weather conditions over West Java.

The purpose of this research is to provide estimates of the contents of water vapor in the atmosphere, using GPS stations in Indonesia, is known as INACORS-BIG. In this research also shows the accuracy of the test that compared with meteorological data that has been obtained from BMKG. Therefore, this research needs to be done for the benefit of weather forecasts especially rain. And to test the measurement of water vapor using GPS in Indonesia.

Weather forecast models require three-dimensional temperature, moisture, pressure, and wind data (four dimensional in time). Typically this data is obtained through radiosondes and other techniques. These techniques are often limited spatially and temporally, thus limiting the effectiveness of the forecast models. By better understanding water vapor, as well as the other inputs to the models, more accurate forecast models can be developed and new observational techniques can be investigated.

The GPS techniques discussed here will provide additional atmospheric data to increase vertical resolution in the case of space-based GPS receivers and horizontal resolution in the case of ground-based GPS receivers. With both techniques, the temporal resolution will be greatly improved.

Keywords: INA-CORS, Water Vapor, Weather Forecasts



## Impact of advanced ZTD estimate method (Part 2) –Comparison with PWV values by radiosonde observations –

\*Seiichi Shimada<sup>1</sup>

1. Graduate School of Frontier Sciences, University of Tokyo Nippo Co. Ltd.

In the previous paper (Shimada et al., 2015), we propose the new procedure to estimate Zenith Total Delay (ZTD) to obtain GNSS Precipitable Water Vapor (GNSS PWV). In this procedure, we fix the accurate site coordinates in the estimation of ZTD to exclude the trade-off between the vertical coordinates simultaneously estimated in the conventional procedure. The proposed procedure is as follows: In the first step of the procedure, we estimate daily site coordinates as well as hourly ZTD, every four-hourly atmospheric gradient, and independent ambiguities of all regional network sites as well as the IGS fiducial sites applying the GAMIT program. In the second step, we estimate the accurate present-day site coordinates, estimating from the recent 30-days' time series of the site coordinates solutions applying the Kalman filtering of the GLOBK program, constraining the IGS fiducial site coordinates. Then in the final step of the procedure, we estimate every hourly ZTD, as well as every four-hourly gradients of regional sites and independent ambiguities, fixing the site coordinates obtained in the second step. In this paper we compare thus obtained GNSS PWV values with the radiosonde PWV observation values, as well as the GNSS PWV values estimated applying the conventional method. We calculate GNSS PWV values of the GEONET 92110 (Tsukuba1) site and 93002 (Yasato) site using surface barometric and temperature values observed in JMA Aerological Observatory around 6km SSE of Tsukuba1 site and 24km SSW of Yasato1 site. The standard deviation of the difference between the Tsukuba1 site GNSS PWV and radiosonde PWV in Aerological Observatory, for instance, is 15.8mm in every 12h UT observations from March to December 2010, although the standard deviation by the conventional GNSS PWV and radiosonde PWV 17.8mm. Thus we conclude the proposed method estimates more precise PWV values compared with the conventional method.

Keywords: Zenith Total Delay, GNSS precipitable water vapor, Radiosonde precipitable water vapor

## Water vapor estimation using digital terrestrial broadcasting waves

\*Seiji Kawamura<sup>1</sup>, Hiroki Ohta<sup>1</sup>, Hiroshi Hanado<sup>1</sup>, Masayuki Yamamoto<sup>1</sup>, Nobuyasu Shiga<sup>1</sup>, Kouta Kido<sup>1</sup>, Satoshi Yasuda<sup>1</sup>, Tadahiro Goto<sup>1</sup>, Ryuichi Ichikawa<sup>1</sup>, Jun Amagai<sup>1</sup>, Kuniyasu Imamura<sup>1</sup>, Miho Fujieda<sup>1</sup>, Hironori Iwai<sup>1</sup>, Shigeo Sugitani<sup>1</sup>, Toshio Iguchi<sup>1</sup>

1. National Institute of Information and Communications Technology

A method of estimating water vapor (propagation delay due to water vapor) using digital terrestrial broadcasting waves is proposed. Our target is to improve the accuracy of numerical weather forecast for severe weather phenomena such as localized heavy rainstorms in urban areas through data assimilation. In this method, we estimate water vapor near a ground surface from the horizontal propagation delay of digital terrestrial broadcasting waves. The basic idea of using propagation delay is the same as that of retrieving PWV by using GNSS, in which vertical propagation paths are used. In this study, we use horizontal propagation paths of digital terrestrial broadcasting waves to obtain water vapor information. The main features of this observation are, no need for transmitters (receiving only), applicability wherever digital terrestrial broadcasting is available, and its high time resolution. The vertical and horizontal observations would be complementary to each other.

When radio waves propagate at a 5 km distance, a 1% increase in relative humidity causes a propagation delay of about 17 ps (about 5 mm in length). Because the delay due to water vapor is quite small, very precise measurements (at least several tens of picosecond order) are needed for effective observations. We can derive delay profiles using the received digital terrestrial broadcasting signals. The delay profiles are determined as the power of a certain broadcasting wave as a function of path delay. Each peak in a delay profile corresponds to a signal from a certain source through a certain propagation path. Therefore, using delay profiles enables us to identify the radio waves in a multipath or a multisource. The range resolution of a delay profile, which corresponds to the resolution to identify each signal, is about 50 m because the bandwidth of each channel is 6 MHz. By measuring the phase at a peak of a delay profile continuously, we can monitor the variation of the propagation path length of a certain broadcasting signal. We can estimate the delay due to water vapor from the variation of the propagation path length. The wavelength of a broadcasting wave whose frequency is 500 MHz is about 60 cm. If we measure the phase at a peak of a delay profile of this broadcasting wave with the accuracy of a degree, the accuracy of the propagation path change is about 1.7 (= 600/360) mm. Thus, we can monitor the variation of the propagation path change (i.e., delay) in millimeter order. The ISDB-T system, which is adopted in Japan, uses Orthogonal Frequency Division Multiplexing (OFDM) for the modulation. The bandwidth of a single channel is 6 MHz, and 5617 carriers are used within it. In each carrier, scattered pilots (SPs, known signals) are embedded every 4 symbols. A symbol is the base unit of OFDM modulation, whose length is 1.134 ms. Therefore, the transfer functions, i.e., the Fourier transforms of the impulse responses, are calculated every 4.536 ms using SPs. The delay profiles are derived as the inverse Fourier transforms of the transfer functions with this time resolution. We can measure the variation of propagation delay in millimeter order using the phase of a delay profile in principle.

However, there remains a technical problem. Because the propagation delay is quite small, phase noises of local oscillators at radio towers and receivers are major error factors. Therefore, we observe direct and reflected waves at a single receiving site. If there is a reflector at the opposite side from the radio tower, we can observe direct waves and reflected waves simultaneously. Measurement is conducted using single local oscillator at the observing point. The phase noises of this local oscillator and the radio tower, which

remain in sampled signals of both direct and reflected waves, are cancelled out by taking the difference between both signals. We can measure a roundtrip propagation delay between the observing point and the reflector without synchronizing the local oscillators. The data obtained using digital terrestrial broadcasting waves show good agreement with those obtained by ground-based meteorological observation.

Keywords: water vapor, propagation delay, digital terrestrial broadcasting waves

# A New Index Indicating the Degree of Water Vapor Inhomogeneity Utilizing GNSS Slant Path Delay and its Relation with Short-term Heavy Rainfall

\*Yoshinori Shoji<sup>1</sup>

1. The Second Laboratory of Meteorological Satellite and Observation System Research Department, Meteorological Research Institute

Water vapor plays a significant role on development of hazardous cumulus convection. Water vapor monitoring with high temporal and spatial resolution is indispensable for both predicting and monitoring of such disastrous weather phenomenon. In Japan, a nationwide dense continuous ground based GNSS (global navigation satellite system) network named GEONET (GNSS Earth Observation Network, [http://www.gsi.go.jp/ENGLISH/page\\_e30030.html](http://www.gsi.go.jp/ENGLISH/page_e30030.html)) has also been utilized as a continuous water vapor monitoring network by the Japan Meteorological Agency since 2009.

In order to capture finer water vapor variation, we have been developing GNSS slant-path delay (SPD) utilization to detect strong horizontal water vapor gradient within several kilometer which associated with convective activities.

Shoji (2013) developed procedures for retrieving two indices indicating the degree of inhomogeneity of water vapor using the carrier phase of GNSS measured by each GNSS receiver. One index (WVC) describes the spatial concentration of water vapor, while the other (WVI) indicates higher-order water vapor inhomogeneity. Horizontal scales of the two indices are approximately considered to be 60 km and 2-3 km, respectively. A statistical assessment indicates that the two inhomogeneity indices are correlated with strong rainfall.

One of the most important points of the application is its real-time availability. We have tested MADOCA (Multi-GNSS Advanced Demonstration tool for Orbit and Clock Analysis) real-time ephemerides ([https://ssl.tksk.jaxa.jp/madoca/public/public\\_index\\_en.html](https://ssl.tksk.jaxa.jp/madoca/public/public_index_en.html)) applied to the program package for GNSS positioning “RTKLIB (<http://www.rtklib.com/>)” version 2.4.2 (patch 11).

A three-month comparison of WVI index and short-time heavy precipitation in summer (July –September, 2016) in Japan revealed potential of the WVI index for monitoring development hazardous cumulus convection.

Keywords: Watervapor, GNSS, Cumulus convection

# Building An Online System For Managing, Analyzing And Serving Of Geospatial And Geodynamic Data Of Turkey Based On The User Preferences

\*Deniz Basar<sup>1</sup>, Rahmi Nurhan Celik<sup>1</sup>, Onur Gorgun<sup>2</sup>

1. Istanbul Technical University, 2. Nokia Turkey

A geospatial data infrastructure comprises geospatial databases and data handling facilities, also data producer and consumer interactions. Geospatial data's being produced, managed and served globally is depend on the technical policies, standards, human resources, and technology.

The aim of the study is to propose a Geospatial Data Infrastructure to make geodetic and geodynamic data of Turkey manageable and analyzable on web. Proposed Geospatial Data Infrastructure has a multi-tier architecture which is compliant with INSPIRE, including data layer, service layer and application layer. Data layer consists of records, data and metadata about user generated and GNSS related data. For this purpose, PostgreSQL object-relational database is used, and PostGIS is also used to extend PostgreSQL capabilities to store, manage and serve geospatial data on online platforms.

Service layer follows the principles of Service Oriented Architecture (SOA) to build Network Service Architecture. SOA consists of different services with different purposes, and these services work with harmonization and exchange data easily. Interoperability and continuity of these services can be achieved by Extended Markup Language (XML) based Open Geospatial Consortium (OGC) Standard Services; such as Web Map Service (WMS), Web Feature Services (WFS), Web Processing Service (WPS), Web Coordinate Transform Service (WCTS), Web Map Tile Service (WMTS). In SOA architecture data transfer in between client and server is provided by Representational State Transfer (REST) which is proxy independent and uses Hyper Text transfer Protocol (HTTP) Methods. GeoServer is being employed to interpret and to respond user requests, as a web map server.

Application layer offers two main and many other sub-functionalities that only main functionalities are emphasized here; collecting user request and user data, and visualizing response which is interpreted with respect to user preference.

Keywords: GNSS/GPS, Geospatial Data, Web Based System Architecture, OGC web services

## Calibration technique for water vapor Raman lidar using GNSS PWV and meso-scale model

\*Hayato Kakihara<sup>1</sup>, Masanori Yabuki<sup>1</sup>, Toshitaka Tsuda<sup>1</sup>, Makoto Tsukamoto<sup>2</sup>, Toshikazu Hasegawa<sup>2</sup>

1. Research Institute for Sustainable Humanosphere, Kyoto University, 2. EKO INSTRUMENTS. Co., Ltd.

Water vapor is an important component in atmospheric processes, such as thermodynamic influences on convection initiation and localized extreme weather events associated with severe weather disasters. Accurate observations of water vapor in the atmospheric boundary layer are essential for improved weather forecasting. Raman lidar techniques are useful for observing water vapor profiles. However, the calibration factor based on the system constants of both nitrogen and water vapor channels must be determined before estimating the water vapor from Raman signals. Because the calibration factor is usually evaluated by comparing the results of independent measurements (e.g., radiosonde) of water vapor mixing ratio, it is difficult to apply lidar observations at sites where radiosonde observations cannot be carried out.

In this study, we propose a new calibration technique for water vapor Raman lidar using global navigation satellite system (GNSS)-derived precipitable water vapor (PWV) and the Japan Meteorological Agency Meso-Scale Model (MSM). The analysis was accomplished by directly fitting the GNSS-PWV to integrated water vapor profiles combined with the MSM and the results of the Raman lidar observation. This method can be applied to lidar signals under a limited height range due to weather conditions and lidar specifications. For example, Raman lidar using a laser operating in the ultraviolet C (UV-C) region has the advantage of having no daytime solar background radiation in the system. However, the observation range is limited at altitudes lower than 1–3 km because of the strong ozone absorption in the UV-C region. The new calibration method will allow the utilization of various types of Raman lidar systems. In this paper, we will introduce our proposed calibration techniques as well as the preliminary results on the accuracy of the estimated calibration factor based on numerical simulations.

Keywords: water vapor, lidar, GNSS, MSM

## Long-term monitoring of water vapor by using a next generation microwave radiometer “KUMODES”

\*Taketo Nagasaki<sup>1</sup>, Kentaro Araki<sup>2</sup>, Hiroshi Ishimoto<sup>2</sup>, Ryuichi Ichikawa<sup>3</sup>, Hiroshi Takiguchi<sup>3</sup>, Osamu Tajima<sup>1</sup>

1. High Energy Accelerator Research Organization, IPNS, 2. Meteorological Research Institute, Forecast research department, 3. National Institute of Information and Communications Technology

Weather forecasts in the early stage are important to minimize damages caused by natural disasters. In particular, the forecast of sudden natural disasters (e.g. tornadoes, heavy snowfalls, heavy rainfalls) is an important subject. The sudden natural disasters follow the rapid change of atmospheric thermodynamic field. Precise monitoring of the atmosphere in high rate is essential to understand its variation.

"KUMODES" is a next-generation microwave radiometer. It simultaneously measures the atmospheric radiation at 20 - 30 GHz range and 50 - 60 GHz range. The radiation spectrum at 20 - 30 GHz range by using a cryogenic receiver allows us to measure the quantity of water vapor as well as the thickness of clouds. The cryogenic system provides us the low noise data. The spectrum at 50 - 60 GHz range allows us to measure the vertical profile of the physical temperature for Oxygen molecule. Novel calibration technique using a blackbody material maintained at 50 K is useful for long-term observations. Configuration for the atmospheric observation or calibration is switched by using an optical path selector. A direction of wiregrid selects each signal. We can remotely control the configuration by using the mechanical drive for the selector. This technique guarantees the quality of the data in long-term without any special work during the observation.

Towards the research about the atmospheric thermodynamic field, we have observed atmosphere by using KUMODES in Tsukuba city. In this presentation, we will report the status of our long-term observation including comparisons with other monitors. We will also introduce a hand-carry version of KUMODES which is under development.

This research has been funded by “Program for Creating STart-ups from Advance Research and Technology (START Program)” from the Ministry of Education, Culture, Sports, Science and Technology, Japan, <http://www.jst.go.jp/start/en/index.html>.

Keywords: atmospheric water vapor, radiometer, thermodynamic environment

## A comparison of precipitable water vapor retrieved with novel ground-based microwave radiometer, GPS and analysis data in Tsukuba during a cold front passage

\*Ryuichi Ichikawa<sup>1</sup>, Hiroshi TAKIGUCHI<sup>1</sup>, Taketo NAGASAKI<sup>2</sup>, Osamu TAJIMA<sup>2</sup>, Kentaro ARAKI<sup>3</sup>

1. National Institute of Information and Communications Technology, 2. High Energy Accelerator Research Organization (KEK), 3. Meteorological Research Institute

We have developed a state-of-the-art microwave radiometer named KUMODeS (KEK Universal Moisture and Oxygen Detection System) using the technology of millimeter-wave spectroscopy for the high-resolution and high-precision monitoring of water vapor behavior. We have carried out comparative measurements of precipitable water vapor (PWV) in order to investigate the potential of KUMODeS/PWV measurements.

KUMODeS measures spectra using two receivers with frequency bands of 20–30 GHz and 50–60 GHz. The low-noise amplifier of the first receiver and a cold calibration source are implemented in a cryostat, which is maintained at 10 K in order to improve the sensitivity in the detection of the characteristic broad peak of water vapor at around 22 GHz. The second receiver is used to measure the absorption peaks of oxygen (~60 GHz).


The GPS-based PWV is estimated reliably with 1–2 mm accuracy according to previous studies. The GPS PWV values are retrieved from zenith wet delays (ZWDs), which are computed by subtracting the zenith hydrostatic delays (ZHDs) from GPS-based zenith total delays (ZTDs). In this procedure, the ZHDs are obtained from the surface pressure and temperature.

We analyzed the PWV variation in Tsukuba, Japan, derived from three techniques, i.e., using KUMODeS, GPS and JMA operational local analysis (LA), during a cold front passage. The PWV measurements derived from GPS and KUMODeS have temporal resolutions of 30 s and about 2 min, respectively. The estimates from the LA have a temporal resolution of 1 h. A comparison of time series shows good agreement between the PWV measurements retrieved from KUMODeS, GPS and the LA between 20 and 22 December 2016. On the other hand, some differences between them appeared after the heavy rainfall of 22 December.

Although further investigation is required to evaluate the performance of KUMODeS, the preliminary result of the comparison implies the consistency and potential of KUMODeS measurements.

Keywords: microwave radiometer, precipitable water vapor, GNSS



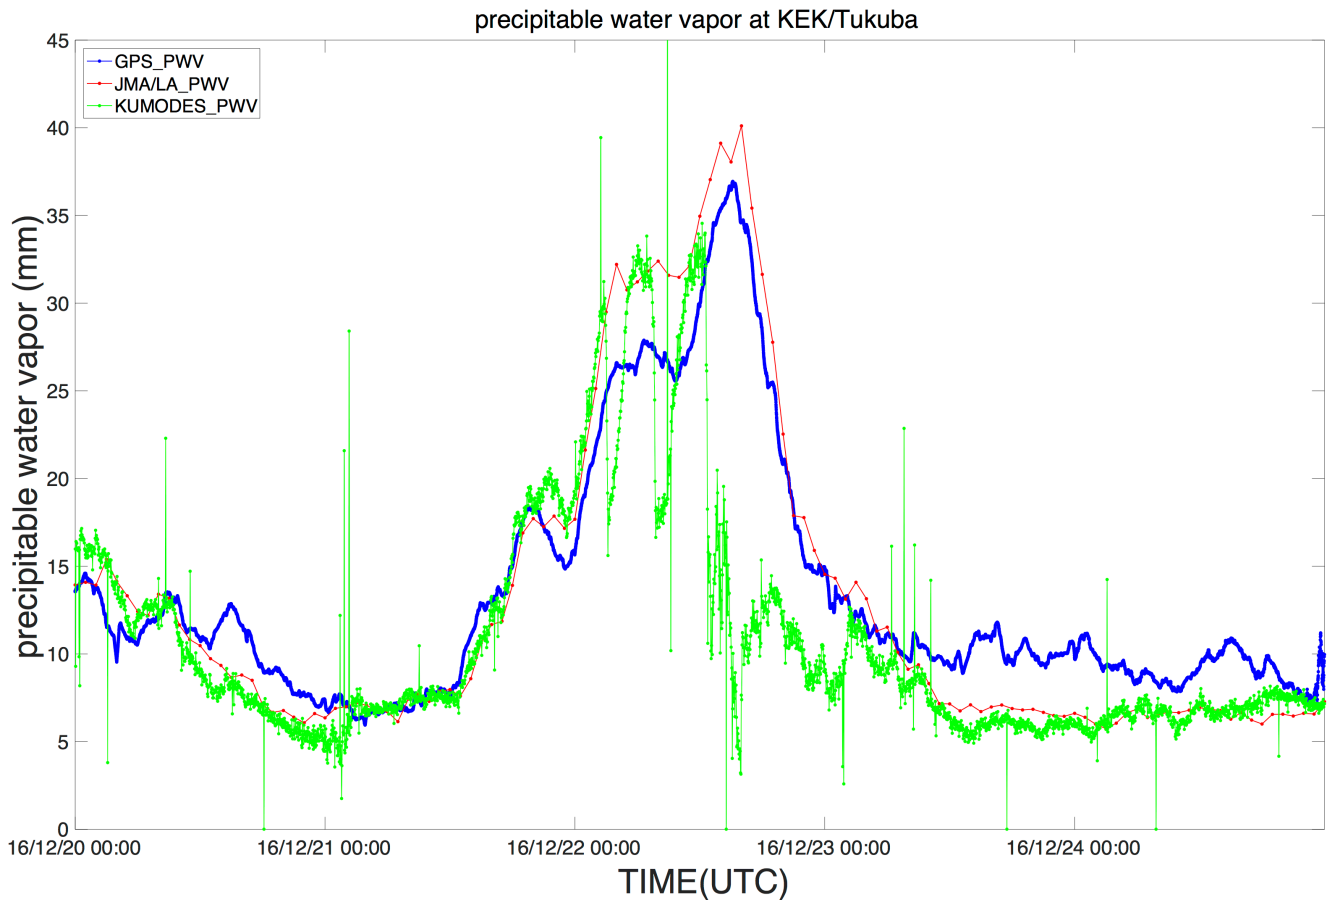

# Long-term behavior of precipitable water vapor over the last 20 years and regionality of atmospheric delay gradient

\*Ryota Sato<sup>1</sup>, Kosuke Heki<sup>1</sup>


1. Hokkaido University department of natural history sciences

Recent increase of extreme climate events has been a focus of debate all over the world, and they believe that global warming is responsible for the increase. IPCC AR5 (Intergovernmental Panel on Climate Change Fifth Assessment Report) suggested that the average temperature on Earth increased by 0.85°C from 1880 to 2012 and the average temperature over the last 30 years is higher than any decadal averages since 1850. There is little doubt concerning the reality of the on-going global warming. It is an important meteorological issue to understand how the changes of atmospheric water vapor influence global warming. By observing the distribution and dynamics of atmospheric water vapor, we can understand its link to the climate change. It will also contribute to improve the accuracy of forecasting precipitation. Precise knowledge of the long-term behavior of water vapor would enable us to predict future climate changes over centuries.

Microwave signals from GNSS satellites experience delays when they propagate the neutral atmosphere. We can infer the amount of wet atmospheric delay (delay caused by water vapor) by subtracting the hydrostatic delay (delay caused by dry atmosphere) from the total delay. In this research, I estimated changes of atmospheric water vapor from 1996 to 2016 by combining the atmospheric delays from the Japanese dense GNSS array GEONET (GNSS Earth Observation NETWORK) with the surface atmospheric pressure data from the Japan Meteorological Agency. I then found that the atmospheric water vapor shows complicated inter-annual variations rather than simple monotonous increase. By comparing the behaviors of the atmospheric delays at various points in Japan, I found that multiple factors, e.g. latitude and height, influence the amount of delay.

Atmospheric delay gradient is an important factor to reduce positioning errors when atmospheric delays are not in azimuthal symmetry. In the early days of positioning with GNSS, they assumed that the atmospheric delay depends only on the elevation angle. Now it became standard to model its azimuthal dependence by introducing the atmospheric delay gradient as a new parameter. Estimating the gradients all over the Japanese Islands also made it possible to assess the non-uniform distribution of water vapor not canceled by taking long-term averages. I found several general tendencies in the time-averaged atmospheric delay gradient vectors, e.g. they often show significant southward components, and they are often perpendicular to the coastline and tend from ocean to land.

Keywords: GNSS, PWV, Long term variation

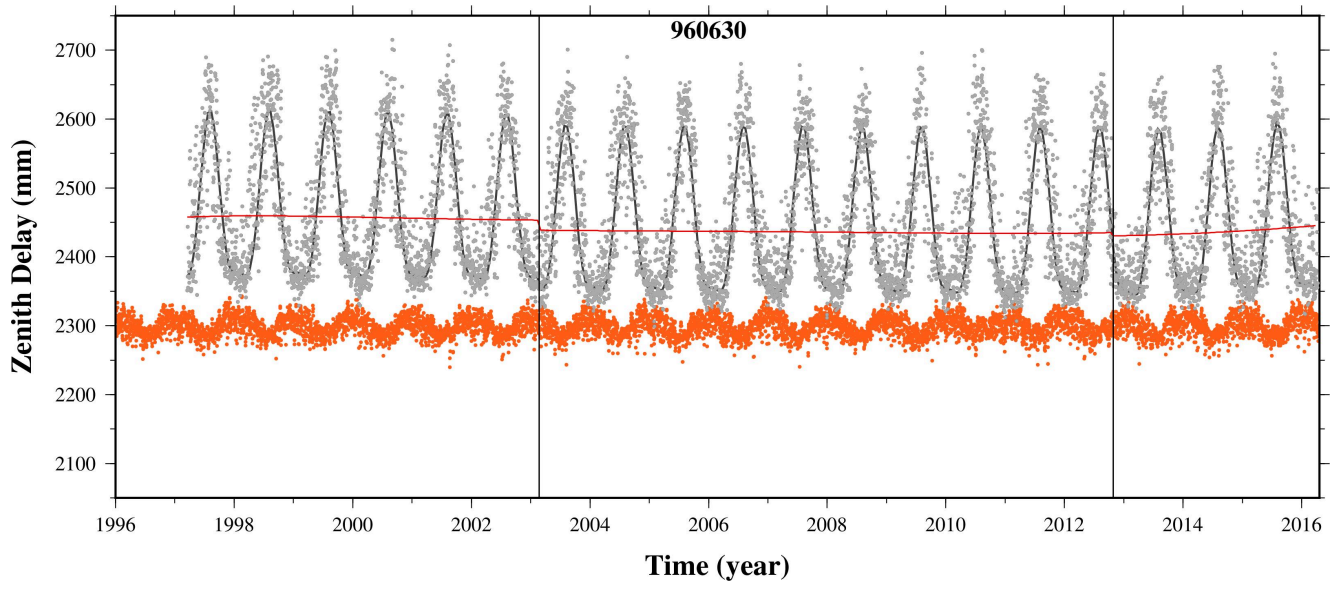

# Relationships among Rainfall Distribution, Surface Wind, and Precipitable Water Vapor derived from GNSS during Localized Heavy Rainfall in Tokyo in Summer

\*Yoshihito Seto<sup>1</sup>, Hitoshi Yokoyama<sup>2</sup>, Tsuyoshi Nakatani<sup>2</sup>, Haruo Ando<sup>3</sup>, Nobumitsu Tsunematsu<sup>3</sup>, Yoshinori Shoji<sup>4</sup>, Kenichi Kusunoki<sup>4</sup>, Masaya Nakayama<sup>5</sup>, Yuto Saitoh<sup>6</sup>, Hideo Takahashi<sup>1</sup>

1. Department of Geography, Graduate School of Urban Environmental Sciences, Tokyo Metropolitan University, 2. National Research Institute for Earth Science and Disaster Resilience, 3. Tokyo Metropolitan Research Institute for Environmental Protection, 4. Meteorological Research Institute, 5. Information Technology Center, the University of Tokyo, 6. West Nippon Expressway Company Limited

In recent years, short-term heavy-rainfall events that have caused various damages such as flooding have frequently occurred in the Tokyo Metropolitan area in summer. This study aims to clarify the evolutionary process of short-term heavy rainfall as a contribution to short-range forecasting of heavy rainfall that occurs locally.

The relationships between the occurrence of intense rainfall and the convergence of surface winds and water vapor concentration for typical heavy-rainfall cases were examined using data from July to August in 2011–2013 obtained from high-density meteorological observations in Tokyo, Japan. Additionally, the differences in the temporal variations in wind convergence and water vapor between days with and without heavy rainfall events were compared.

Corresponding to the heavy-rainfall area, the convergence of surface winds tended to increase for several tens of minutes prior to the heavy rainfall. The peak of convergence was observed 10–30 min before the heavy-rainfall occurrence, and increasing of convergence continued for approximately 30 min until the convergence peak time. Around the heavy-rainfall area, the increase in the water vapor concentration index was observed coincide with the increasing of convergence. From these results, by monitoring the temporal variations and distributions of these parameters using a high-density observation network, it should be possible to predict the occurrence of heavy rainfall rapidly and accurately.

This study is supported by the S-8 Project, Comprehensive Research on Climate Change Impact Assessment and Adaptation Policies, implemented by the Environment Research and Technology Development Fund of the Ministry of the Environment, Japan and Tokyo Metropolitan Area Convection Study for Extreme Weather Resilient Cities (TOMACS) under the Funds for Integrated Promotion of Social System Reform and Research and Development by the Ministry of Education, Culture, Sports, Science and Technology, Japan.

Keywords: localized heavy rainfall, wind convergence, water vapor, high-density observation network

## The Multi-path Effect on PWV Retrieved from Shipborne GNSS Measurements

\*Yoshinori Shoji<sup>1</sup>, Kazutoshi Sato<sup>2</sup>, Masanori Yabuki<sup>3</sup>, Toshitaka Tsuda<sup>3</sup>

1. The Second Laboratory of Meteorological Satellite and Observation System Research Department, Meteorological Research Institute, 2. Japan Aerospace Exploration Agency, 3. Research Institute for Sustainable Humanosphere

Water vapor plays a significant role on development of hazardous cumulus convection. Water vapor monitoring with high temporal and spatial resolution is indispensable for both predicting and monitoring of such disastrous weather phenomenon. In Japan, a nationwide dense continuous ground based GNSS (global navigation satellite system) network named GEONET (GNSS Earth Observation Network, [http://www.gsi.go.jp/ENGLISH/page\\_e30030.html](http://www.gsi.go.jp/ENGLISH/page_e30030.html)) has also been utilized as a continuous water vapor monitoring network by the Japan Meteorological Agency since 2009.

In order to capture finer water vapor variation, we have been developing observation system of water vapor over the ocean using GNSS receivers equipped on top of floating buoys and vessels (Shoji et al. 2016). One of the most important points of the application is its real-time availability. We have tested MADOCA (Multi-GNSS Advanced Demonstration tool for Orbit and Clock Analysis) real-time ephemerides ([https://ssl.tksc.jaxa.jp/madoca/public/public\\_index\\_en.html](https://ssl.tksc.jaxa.jp/madoca/public/public_index_en.html)) applied to the program package for GNSS positioning “RTKLIB (<http://www.rtklib.com/>)” version 2.4.2 (patch 11).

In year 2015, we conducted observations using four shipborne GNSS receivers on three research vessels and one passenger ferry to assess the real-time practicality of measuring GNSS-derived precipitable water vapor (PWV) over the ocean. All antennas were equipped on the upper-most deck of each vessel. A kinematic precise point positioning strategy was used for the GNSS analysis with a real-time GNSS satellite ephemerides (orbit and clock information).

The analyzed time series of PWV was contaminated with unrealistic sharp variations that occasionally occurred. Periodic occurrence of a spiky variation with a cycle of one sidereal day, along with post-fit phase residuals averaged at each elevation and azimuth, indicated that one of the causes of the unrealistically large time variation was interference of reflected signals (multi-path).

A simple quality control (QC) procedure based on the amount of PWV time variation was proposed. After the QC was applied, the retrieved PWVs had 3.4 –5.4mm root mean square (RMS) differences against radiosonde observations, and 2.3 –3.7mm RMS against those retrieved at nearby ground GNSS stations. The proposed QC procedure rejected more than 60 percent of retrieved PWV on research vessels and 6 – 11 percent on a passenger ferry. The results demonstrate the great potential of the real-time ephemerides and the necessity for careful consideration of the observation environment.

On 20 October 2016, we introduced an additional GNSS antenna on top of the mast of a vessel and conducted campaign observation till March 2017. Comparison with PWVs analyzed at nearby GEONET stations resulted that both antennas (mast top and deck) show about 2 mm RMS. In the case of the mast top observation, about 1 percent of retrieved PWV were rejected while more than 30 percent were rejected in the case of the deck observation.

Keywords: Watervapor, GNSS, Kinematic