

## Interdisciplinary studies on groundwater for global sustainability

\*谷口 真人<sup>1</sup>

\*Makoto Taniguchi<sup>1</sup>

1. 総合地球環境学研究所

1. Research Institute for Humanity and Nature

Interdisciplinary groundwater issues related to global environmental changes are, subsurface warming due to global warming and urbanization, global groundwater depression due to rapid increase in groundwater demand, submarine groundwater discharge which is one of the water cycle component but not globally evaluated yet, and groundwater footprint which is related to global sustainability. These issues have been studied not only in the area of groundwater hydrology but also in the multi-disciplines such as coastal oceanography for submarine groundwater discharge, geothermic for subsurface warming, and geodesy for global groundwater depression which was revealed by satellite GRACE. In this paper, interdisciplinary studies on groundwater and subsurface environmental changes for global sustainability have been reviewed with conjunction of oceanography, geothermic and geodesy.

キーワード：地下水、持続可能な地球社会、学際研究

Keywords: groundwater, global sustainability, interdisciplinary

# The Global Groundwater Crisis and Management Implications for Food and Water Security

\*James S Famiglietti<sup>1</sup>, Matthew Rodell<sup>2</sup>, Alexandra S. Richey<sup>3</sup>, John T. Reager<sup>1</sup>

1. California Institute of Technology, Jet Propulsion Laboratory, 2. NASA Goddard Space Flight Center, 3. Washington State University

Groundwater depletion in the world's major aquifer systems poses a major threat to global food and water security. Many of these aquifers are trans-boundary, both within and between nations. However, very few formal trans-boundary groundwater agreements exist, at least internationally. In this presentation we review the 15-year lifetime of GRACE data (2002-2017) and our estimates of changing freshwater availability, including groundwater storage changes at the regional and aquifer scales. A roadmap for ensuring sound international groundwater management is discussed, as are implications for global food security.

Keywords: groundwater depletion, food security, water security

## The contrasting impacts of climate change on groundwater hydrology in the world's major aquifers

\*Min-Hui Lo<sup>1</sup>, Wen-Ying Wu<sup>2</sup>, Yoshihide Wada<sup>3</sup>, James Famiglietti<sup>4</sup>, John Reager<sup>4</sup>, Pat Yeh<sup>5</sup>, Agnès Ducharme<sup>6</sup>, Ren-Jie Wu<sup>1</sup>

1. National Taiwan University, 2. UT-Austin, 3. IIASA, 4. JPL, 5. National University of Singapore (NUS), 6. Directrice de recherche CNRS, UMR METIS (anciennement Sisyphe)

Groundwater is the source for approximately 40% of all global freshwater demand, and is thus critical for water supplies and associated food production in arid and semi-arid regions, especially during dry seasons. The increasing demand for water and food (due to population growth) and variability in water resources (due to climate change) have led to long-term groundwater depletion, compromising the sustainability of human water use in several regions of the world. Here, we utilized fully coupled climate model simulations from the Community Earth System Model Large Ensemble Project to investigate groundwater storage changes in the world's major aquifers (Guarani, Southern Plains, Northwestern India, Middle East, Canning, North China Plain, and Central Valley) under future climate changes. The projections show that climate change contributes to changes in groundwater storage not only via changes in precipitation, but also through changes in plant transpiration under CO<sub>2</sub> fertilization effects, reductions in snowmelt, and enhancement of surface evaporation, which collectively lead to contrasting effects between increased precipitation and increased evapotranspiration.

Keywords: CESM-LE, groundwater

# Large-scale modelling of groundwater resources: insight from the comparison of models and in-situ observations in Sub-Saharan Africa

\*Richard G Taylor<sup>1</sup>

1. University College London

Fundamental challenges remain in the large-scale modelling of groundwater resources using either Global Hydrological Models (GHMs) or Land-Surface Models (LSMs). These challenges include the representation of groundwater recharge processes and geological controls on groundwater occurrence. Current large-scale models, with one notable exception, disregard indirect (*i.e.* focused) recharge that occurs via leakage from surface waters and is often the dominant recharge pathway in semi-arid environments. Further, models do not represent the preferential pathways which can control the timing and magnitude of recharge. Additional challenges include the representation of human withdrawals of groundwater, particularly in areas of intensive irrigation, that are generally disregarded (*e.g.* LSMs) and largely untested. Indeed, because groundwater-level monitoring networks are so limited globally, current assessments of groundwater resources commonly rely upon output from GCMs and LSMs as well as GRACE satellite observations in which groundwater storage changes are resolved using large-scale model data. Such models are furthermore the primary source of information on projected climate change impacts on groundwater resources. There remains a paucity of studies examining the robustness of terrestrial water balances including estimates of groundwater recharge and storage simulated by LSMs and GHMs using in situ observations. On behalf of *The Chronicles Consortium*, I report preliminary analyses comparing groundwater recharge estimated by both LSMs and GHMs to long-term observations of groundwater levels and stable-isotope ratios. Such comparisons require careful consideration as in situ observations may not represent grid-scale averaging. Nevertheless, given the non-linearities in model parameterisations that can occur during the shift to higher grid resolutions (*e.g.* 0.5° to 5 km), it will become increasingly important to reconcile revised model structures with *in situ* observations. Preliminary results derive from the analysis of the relationship between monthly precipitation and subsurface runoff (*i.e.* proxy for groundwater recharge) from 4 LSMs (CLM2.0/CLM4.5, NOAH, MOSAIC, VIC) and 3 GHMs (PCR-GLOBWB, WaterGAP, MATSIRO) at 1°x1° and both multi-decadal records of groundwater levels from 8 countries (Benin, Burkina Faso, Ghana, Niger, South Africa, Tanzania, Uganda, Zimbabwe) and stable-isotope ratios collated from long-term IAEA stations and published sources in 7 countries (Burkina Faso, Chad, Ethiopia, Namibia, South Africa, Tanzania, Zimbabwe). Analyses reveal substantial spatial variability among the GLDAS LSMs in subsurface runoff across Africa. Precipitation and subsurface runoff in LSMs show non-linear (*i.e.* reflecting bias to heavy rainfall), linear, or no bivariate associations in contrast to consistently non-linear relationships noted from the comparison of stable-isotope ratios in rainfall and groundwater. GHMs also demonstrate substantial variability in computed potential recharge though greater consistency is observed in their dependence of groundwater recharge on monthly or seasonal rainfall exceeding a monthly or seasonal threshold, consistent with some piezometric records. A key outcome from the analysis of multi-decadal groundwater-level data is the importance of indirect recharge processes (*e.g.* Niger, South Africa, Tanzania, Zimbabwe) despite their current exclusion from all but one large-scale model. On-going initiatives (*e.g.* GEWEX-GHP/GLASS, *The Chronicles Consortium*) seeking to bring large-scale modelling and GRACE communities together with those analysing *in situ* observations are urgently required to address fundamental and substantial limitations that persist in the modelled representation of groundwater in the terrestrial water balance, particularly in the tropics.

Keywords: groundwater, piezometry, models, stable-isotope ratios

# Global, Regional, and Local-scale Assessment of the Impacts of Irrigation and Reservoir Operation on Land Hydrology and Climate

\*Yadu N Pokhrel<sup>1</sup>, Farshid Felfelani<sup>1</sup>, Sanghoon Shin<sup>1</sup>

1. Michigan State University

In this study, we use two different land surface hydrological models to assess the global, regional, and local-scale impacts of human land-water management practices on land surface hydrology and climate system. The first model is a global land surface model called the HiGW-MAT that simulates the flows and storages of water globally at 1-degree grids, taking into account various human activities such as irrigation, reservoir operation, and groundwater pumping. The second model is the regional hydrological model called the LEAF-Hydro-Flood, which simulates surface and sub-surface hydrological processes including river-floodplain dynamics at 2 to 5km grids; the model has recently been enhanced to simulate anthropogenic water flows by incorporating the schemes to represent the aforementioned human activities. A series of numerical experiments are carried out by turning the human impact schemes on and off in each of the two models. We present four sets of analysis by using the results from the two models. First, results from the global model are used to examine the human-induced changes in global and regional water balance, with an emphasis on the widely debated issue of the desiccation of the Aral Sea in central Asia and the groundwater depletion in northwest India and Pakistan. In this analysis, we make an integrated use of model results and the data from the Gravity Recovery and Climate Experiment (GRACE) satellite mission. Second, we examine the global and regional climate impacts of human activities, particularly irrigation, again by using the results of the global model coupled with its parent climate model MIROC. Third, we compare the results from the two models over the selected river basins to examine the role of increased spatial resolution in the regional model to better simulate certain hydrologic fluxes and stores, essential to capture the human footprint. Finally, we use the results from the regional model to highlight the importance of and challenges in using the high-resolution model to simulate reservoir operation over regional to local scales.

Keywords: Hydrological modeling, Irrigation, Reservoir Operation

## Contribution of groundwater pumping to global sea level rise: regional pattern and temporal evolution

\*Pat J.-F. Yeh<sup>1</sup>, Min-Hui Lo<sup>2</sup>, Yoshihide Wada<sup>3</sup>, Yanru Chen<sup>1</sup>, Chong Zhang<sup>4</sup>, Ren Jie Wu<sup>2</sup>, James Famiglietti<sup>5</sup>

1. National University of Singapore, 2. National Taiwan University, 3. Utrecht University, 4. Beijing Capital Normal University, 5. NASA Jet Propulsion Laboratory, California Institute of Technology

This study examines the impacts of groundwater pumping on terrestrial and atmospheric water balances and quantify its contribution to global sea level rise (SLR) using a global climate modelling approach. This is a follow-up of the pioneering study by Wada et al. (2016). In contrast to Wada et al (2016) in which the analysis was limited to the global-integrated long-term averages, the present study extends to analyse spatial and temporal patterns in the water balance at global, continental and aquifer levels, and quantify the contributions from terrestrial water storage (TWS) changes and anthropogenic pumping to SLR on the continental and aquifer scales. This research is divided into: 1. Global analysis, 2. Continental (Africa, Asia, Europe, North America, Oceania, and South America) analysis, and 3. Aquifer-based analysis (contribution from TWS changes to SLR will be analysed based on 37 global major aquifers).

Keywords: Groundwater pumping, sea level rise, terrestrial water storage

## Who is eating up the world's aquifers? Groundwater depletion embedded in international food trade.

\*Carole Dalin<sup>1</sup>, Yoshihide Wada<sup>2,3,4,5</sup>, Thomas Kastner<sup>6</sup>, Michael Puma<sup>3,4</sup>

1. Univ. College London, 2. International Institute for Applied Systems Analysis, 3. Columbia Univ., 4. NASA Goddard Institute for Space Studies, 5. Utrecht Univ., 6. Senckenberg Biodiversity and Climate Research Centre

Recent hydrological modelling and Earth observations have located and quantified alarming rates of groundwater depletion over the world. This is primarily due to water withdrawals for irrigation, but the connections with their main driver, global food consumption, have not yet been explored. Here we show that approximately eleven percent of non-renewable groundwater use for irrigation is embedded in food trade, of which two thirds are exported by Pakistan, the United States and India alone. We provide the first quantification of depleting groundwater embedded in the world's food trade by combining unique global, crop-specific estimates of non-renewable groundwater abstraction with international food trade data. A vast majority of the world's population lives in countries sourcing nearly all their staple crop imports from partners who deplete groundwater to produce these crops, highlighting risks for global food and water security. Groups of countries are found particularly exposed to these risks as they both produce and import food irrigated from rapidly depleting aquifers, such as the USA, Mexico, Iran and China. These results can help improve the sustainability of global food production and groundwater resources management by identifying priority regions and agricultural products at risk as well as the end-consumers of these products.

Keywords: Food trade, Groundwater depletion, Embedded water resources (virtual water)



# Drought impacts to water footprints and virtual water transfers of the Central Valley of California

Landon Marston<sup>1</sup>, \*Megan Konar<sup>1</sup>

1. University of Illinois at Urbana Champaign

The Central Valley of California is one of the most productive agricultural locations in the world, made possible by a complex and vast irrigation system. Beginning in 2012, California endured one of the worst droughts in its history. Local impacts of the drought have been evaluated, but it is not yet well understood how the drought reverberated through the global food system. Here, we quantify drought impacts to the water footprint (WF) of agricultural production and virtual water transfers (VWT) of the Central Valley of California. To do this, we utilize high spatial, temporal, and water source resolution datasets and a crop model from pre-drought conditions (2011) through three years of exceptional drought (2012--2014). Despite a 6.5% reduction in crop production over the course of the drought, the WF of agricultural production in the Central Valley increased by 1.3%. This was due to greater crop water requirements from higher temperatures and a shift to more water-intensive orchard and vine crops. The groundwater WF increased from 5.93 km<sup>3</sup> in 2011 to 11.64 km<sup>3</sup> in 2014, predominantly in the Tulare Basin. During the drought, transfers of food commodities declined by 1.3%. However, total VWT increased by 4.2% (0.57 km<sup>3</sup>), driven by an increase in groundwater VWT (3.31 km<sup>3</sup>), offsetting declines in green and surface VWT. During the drought, local and global consumers doubled their reliance on the already overexploited Central Valley Aquifer. These results indicate that drought may strengthen the telecoupling between unsustainable groundwater withdrawals and distant consumers of groundwater-intensive agricultural commodities.

Keywords: Water footprint, Drought, Virtual water trade, Groundwater, California

# Human impact on hydrological drought in the 20<sup>th</sup> and 21<sup>st</sup> century

\*Niko Wanders<sup>1,2</sup>

1. Civil and Environmental Engineering, Princeton University, Princeton, USA, 2. Department of Physical Geography, Faculty of Geosciences, Utrecht University, Utrecht, the Netherlands

Human actions impact current drought conditions and, in combination with climate change, will very likely impact future hydrological drought characteristics across the world. Here, I quantify the impact of human water use, groundwater pumping, reservoir regulation and climate change on historical and future low flows


on a global scale. I use the global hydrological and water resources model PCR-GLOBWB to simulate daily discharge for the period 1950–2100.

First, I will show a historical analysis for the period 1950-2015, where we focus on the recent drought in the state of California and the alterations in drought characteristics that have occurred due to human water management. Next, I use the latest CMIP5 climate projections taken from five General Circulation Models (GCMs) and four emission scenarios (RCPs), under the framework of the Inter-Sectoral Impact Model Intercomparison Project to project human impact on drought for 2000-2100. A natural or pristine scenario was used to calculate the impact of the climate on hydrological drought and was compared to a scenario with human influences.

The results show that drought is severely affected by human actions, mainly by groundwater pumping and reservoir operations, respectively worsening and alleviating drought severity. For the case study in the state of California, we see the severe impact of human actions on drought in the increase in drought duration compared to the pristine conditions. The impact is most evident in groundwater and discharge, because most of the human impact is caused by groundwater pumping and surface water abstraction. For the 21<sup>st</sup> century, we see a significant impact of climate change and human water use in large parts of Asia, Middle East and the Mediterranean, where the relative contribution of humans on the changed drought severity can be close to 100 percent. The differences between RCPs are small indicating that human water use is proportional to the changes in the climate. Reservoirs tend to reduce the impact of drought by water retention in the wet season, which in turn will lead to increased water availability in the dry season, especially for large regions in Europe and North America. The impact of climate change varies throughout the season for parts of Europe and North America, while in other regions (e.g. North Africa, Middle East and Mediterranean) the impact is not influenced by seasonal changes.

This study illustrates that the impact of groundwater pumping and reservoirs is non-trivial and can vary substantially per region and per season. Considering their large impact on changing drought conditions, human influences should be included in projections of future drought characteristics.

Keywords: Human impact, Drought, Climate change, Groundwater, Reservoirs, PCR-GLOBWB

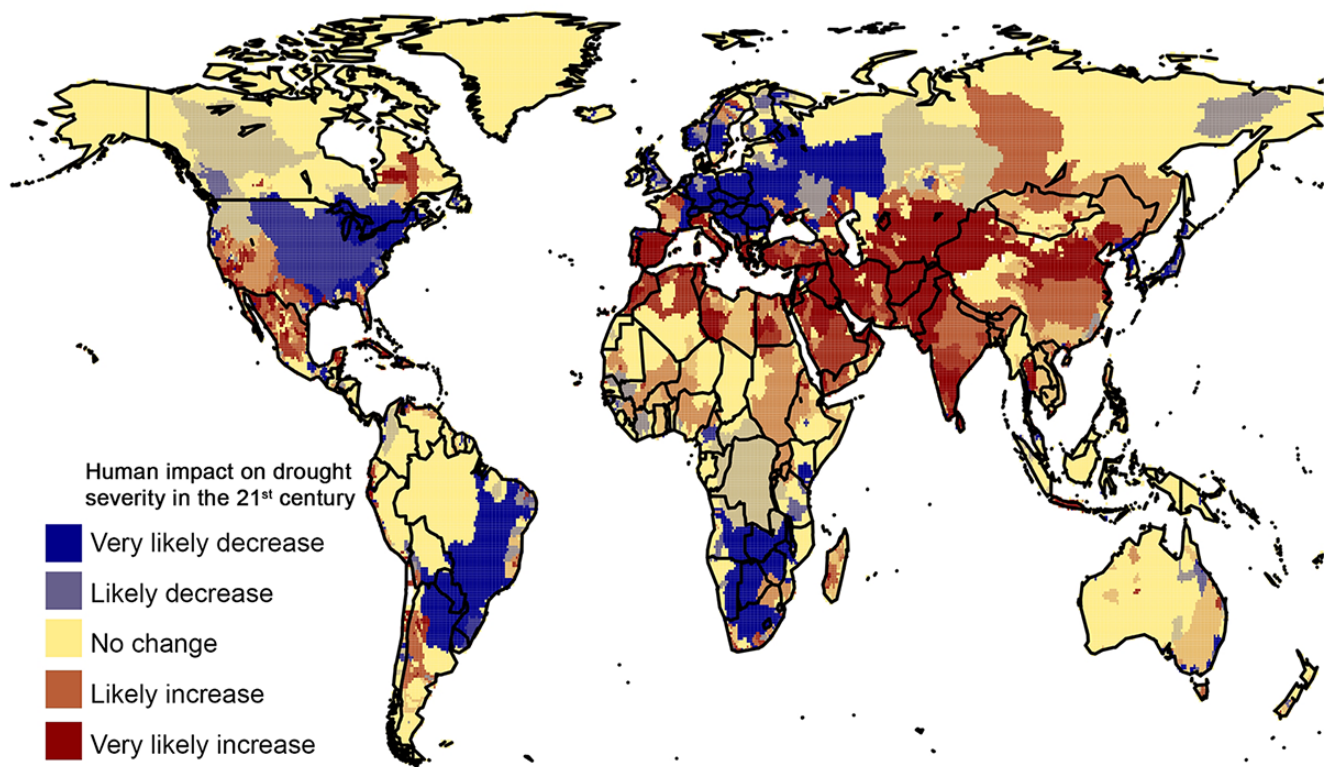

# New approaches for estimating groundwater drought in near real-time in the absence of observed groundwater level data: the 2015 European drought case

\*Anne Frederike Van Loon<sup>1</sup>, Rohini Kumar<sup>2</sup>, Vimal Mishra<sup>3</sup>

1. School of Geography, Earth and Environmental Sciences, University of Birmingham, Birmingham, United Kingdom, 2. UFZ-Helmholtz Centre for Environmental Research, Leipzig, Germany, 3. Civil Engineering, Indian Institute of Technology, Gandhinagar, Gujarat, India

In 2015 central and eastern Europe were affected by severe drought. Impacts of the drought were felt across many sectors, incl. agriculture, drinking water supply, electricity production, navigation, fisheries, and recreation. This drought event has recently been studied from meteorological and streamflow perspective, but no analysis of the groundwater drought has been performed. This is not surprising because real-time groundwater level observations often are not available. In this study we use previously established spatially-explicit relationships between meteorological drought and groundwater drought to quantify the 2015 groundwater drought over two regions in southern Germany and eastern Netherlands. We also tested the applicability of the Gravity Recovery Climate Experiment (GRACE) Terrestrial Water Storage (TWS) and GRACE-based groundwater anomalies to capture the spatial variability of the 2003 and 2015 drought events.


We use the monthly groundwater observations from 2040 wells to establish the spatially varying optimal accumulation period between the Standardized Groundwater Index (SGI) and the Standardized Precipitation Evapotranspiration Index (SPEI) at a 0.25° gridded scale. The resulting optimal accumulation periods range between 1 and more than 24 months, indicating strong spatial differences in groundwater response time to meteorological input over the region.

Based on these optimal accumulation periods, we found that in Germany a uniform severe groundwater drought persisted for several months (i.e. SGI below the drought threshold of 20<sup>th</sup> percentile for almost all grid cells in August, September and October 2015), whereas the Netherlands appeared to have relatively high groundwater levels (never below the drought threshold of 20<sup>th</sup> percentile). The differences between this event and the European 2003 benchmark drought are striking. The 2003 groundwater drought was less uniformly pronounced, both in the Netherlands and Germany, with the regional averaged SGI above the 50<sup>th</sup> percentile. This is because slowly responding wells still were above average from the wet year of 2002-2003, which experienced severe flooding in central Europe.

GRACE-TWS does show that both 2003 and 2015 were relatively dry, but the difference between Germany and the Netherlands in 2015 and the spatially-variable groundwater drought pattern in 2003 were not captured. This could be associated to the coarse spatial scale of GRACE. The simulated groundwater anomalies based on GRACE-TWS deviated considerably from the GRACE-TWS signal and from observed groundwater anomalies. These are therefore not suitable for use in real-time groundwater drought monitoring in our case study regions.

Our study shows that the relationship between meteorological drought and groundwater drought can be used to quantify groundwater drought and that the 2015 groundwater drought in southern Germany was more severe than the 2003 drought, because of preconditions in slowly responding groundwater wells. For sustainable groundwater drought management strategies the use of groundwater level monitoring is needed to study the spatial variability of local groundwater drought, which mostly coincides with drought impacts.

Keywords: groundwater drought, limited data, new techniques, standardised indices, GRACE, 2015  
drought Europe

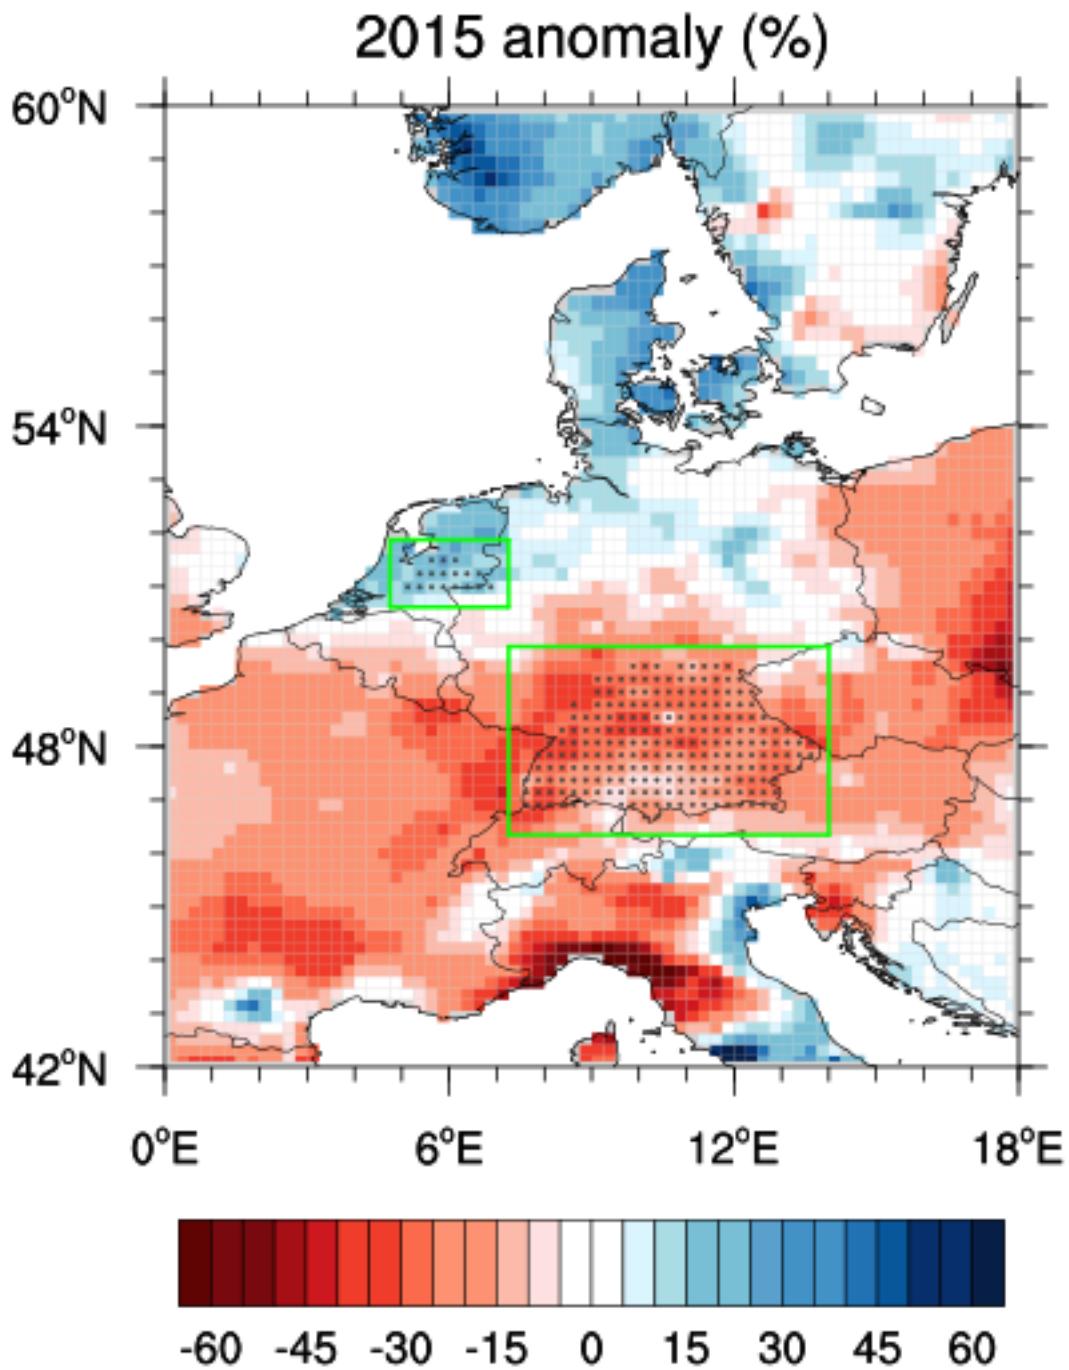

# Impact of the South to North Water Diversion Project on Groundwater Resources of the Beijing Metropolitan Area: Implications for Sustainable Groundwater Use

\*Di Long<sup>1</sup>, Yoshihide Wada<sup>2,3</sup>

1. Tsinghua University, 2. International Institute for Applied Systems Analysis, 3. Utrecht University

As China's Capital, Beijing currently has a population of 22 million people with per capital water resources of less than 100 m<sup>3</sup>, one twentieth of the national average and one eightieth of the global. Groundwater withdrawals (2.3 billion m<sup>3</sup>/year) account for approximately two thirds of total water use (3.5 billion m<sup>3</sup>/year) in Beijing, resulting in significant groundwater depletion and associated environmental issues, such as land subsidence. Ever-growing population and economy will add further pressure on Beijing's groundwater resources. Unsustainable groundwater use threatens societal and economic development of Beijing and poses a large uncertainty in future water supply. To partly alleviate the water shortage issue in the more arid and industrialized North China, the Chinese government has launched the largest water diversion project in the world, i.e., the South to North Water Diversion Project (SNWD), which is a multi-decadal mega-infrastructure project, with the aim to transfer 44.8 billion m<sup>3</sup> of fresh water annually from the Yangtze River in the more humid south through three canal and pipeline systems (east, central, and west routes). Its central route flows from the upper reaches of the Han River, a tributary of the Yangtze River to Beijing, Tianjin and other major cities in Hebei and Henan Provinces. Since Dec 2014 when the water transferred by the central route reached Beijing to Feb 2017, totally 2 billion m<sup>3</sup> of water has been transferred. This has profoundly altered the structure of water supply in Beijing. This study quantifies how the SNWD project impacts groundwater storage of Beijing using modeling, and ground and satellite observations, and projects how groundwater storage changes in the future under different climate and, social and economic scenarios.

Keywords: Groundwater, South to North Water Diversion Project in China, Beijing

## Economic costs of reducing unsustainable groundwater use: Application of IIASA global hydro-economic modeling framework

\*TaHER kahil<sup>1</sup>, Simon Parkinson<sup>1</sup>, Peter Burek<sup>1</sup>, Yusuke Satoh<sup>1</sup>, Peter Greve<sup>1</sup>, Günther Fischer<sup>1</sup>, Sylvia Tramberend<sup>1</sup>, Simon Langan<sup>1</sup>, Yoshihide Wada<sup>1</sup>

1. International Institute for Applied Systems Analysis

Global water withdrawals for beneficial purposes have been increasing substantially in the last century, driven by the growth in population, food production, and income. The ensuing damages have been building up rapidly during recent years, with many basins around the world undergoing pervasive water scarcity conditions and progressive depletion of groundwater. Moreover, impacts of future climatic and socio-economic changes are projected to further exacerbate supply deficit in those basins. Therefore, the development of adaptation strategies to address growing water scarcity is needed. Groundwater resources are expected to play an important role and groundwater pumping will likely increase in the future to offset the declines in surface water availability and to provide a buffer against extreme drought events. However, groundwater resources are vulnerable to human activities and climatic conditions. For instance, aquifer systems in numerous regions around the world have been suffering considerable pressures during recent years, with extraction rates well above recharge. Intensive extractions have been brought about mainly by the adoption of low-cost pumping technologies and the supply of subsidized energy.

The damages from groundwater depletion on water and food security and ecosystem wellbeing could be substantial and irreversible, which call for the design of sustainable groundwater management policies. The design of policies requires quantitative tools for planning and policy evaluation that integrate biophysical, institutional, environmental, and economic metrics, reflecting decision-making objectives and processes. This study presents a global hydro-economic modeling framework developed at IIASA that represents water resource systems, infrastructure, management options and associated economic values in an integrated manner. The model is able to interact with existing global integrated assessment tools or global hydrological models. The model includes an economic-hydrologic optimization procedure that aims to balance water demand and supply at the level of large-scale river basins worldwide. The objective of the optimization is to minimize total costs of meeting water demands from agricultural, industrial and domestic sectors, subject to various technical and resource constraints. The optimization includes capacity expansion and is solved over a multi-decadal horizon. Sub-annual variability is incorporated at a monthly time-scale. The model can be used to simulate a variety of basin management decisions including resource extractions, inter-basin transfers, reservoir operation regimes, and water infrastructure investment. The model uses information on water demand and availability provided by existing global integrated assessment models and global hydrological models.

In this study, the model is used to evaluate the effects of different groundwater management policies (unlimited pumping vs. sustainable pumping) under future socio-economic and climatic scenarios (combinations of Shared Socio-economic Pathways (SSPs) and Representative Concentration Pathways (RCPs)). The model is applied to basins in the Middle East and North Africa (MENA) region which provides a challenging case study. However, the modeling framework is designed to be adaptable for any basin elsewhere. Model results show the economic and environmental tradeoffs among the different policy choices and the hurdles facing policies aimed at reducing unsustainable groundwater use. Specifically, our results suggest that addressing the redoubled challenge of adaptation to growing water scarcity and sustainable use of groundwater resources in the MENA region will require major investments in more efficient water use technologies and unconventional freshwater supply options, such as wastewater

recycling and desalination, with potential consequences on water supply costs, energy use and carbon emissions.

Keywords: Hydro-economic modeling, Water scarcity, Groundwater resources, Sustainable management, Policy tradeoffs



## Leave it more to aquifer? Characterizing potential benefits and unintended consequences of weather index insurance on irrigated cropland

\*Chitsomanus P. Muneeppeerakul<sup>1</sup>, Rachata Muneeppeerakul<sup>1</sup>

1. University of Florida

Irrigation is commonly employed as the main strategy to maintain target crop production under climate fluctuations. Weather index insurance presents another mean to cope with climate uncertainty by providing farmers with additional financial resilience at low transaction cost, while avoiding moral hazard and adverse selection that plague traditional crop damage-based insurance. Thus, the integrated use of weather index insurance and irrigation has the potential to reduce groundwater use as irrigation presents a significant share of groundwater depletion. So far, however, weather index insurance has been used almost entirely on rain-fed cropland owing to technical difficulties in the conventional approach to insurance design. We propose an alternative approach to overcome these obstacles and demonstrate how to adopt weather index insurance optimally with available irrigation strategies from a financial perspective. This optimal result, however, may present either potential benefits or unintended consequences for aquifer management.

Keywords: weather index insurance, irrigation, groundwater

# アジアとヨーロッパの巨大都市における地表面温度履歴の推定 Reconstruction of the Thermal Environment Evolution from Subsurface Temperature Distribution in Asian and European Mega cities

\*濱元 栄起<sup>1</sup>、Blum Philipp<sup>2</sup>、Benz Susanne<sup>2</sup>、Limberg Alexander<sup>3</sup>、谷口 真人<sup>4</sup>、宮越 昭暢<sup>4</sup>、有本 弘孝<sup>6</sup>、後藤 秀作<sup>5</sup>、山野 誠<sup>7</sup>

\*Hideki Hamamoto<sup>1</sup>, Philipp Blum<sup>2</sup>, Susanne Benz<sup>2</sup>, Alexander Limberg<sup>3</sup>, Makoto Taniguchi<sup>4</sup>, Akinobu Miyakoshi<sup>4</sup>, Hirotaka Arimoto<sup>6</sup>, Shusaku Goto<sup>5</sup>, Makoto Yamano<sup>7</sup>

1. 埼玉県環境科学国際センター、2. Karlsruhe Institute of Technology、3. Senate Department for the Environment, Transport and Climate Protection, Berlin、4. 総合地球環境学研究所、5. 産業技術総合研究所、6. 地域地盤環境研究所、7. 東京大学地震研究所

1. Center for Environmental Science in Saitama, 2. Karlsruhe Institute of Technology, 3. Senate Department for the Environment, Transport and Climate Protection, Berlin, 4. Research Institute for Humanity and Nature, 5. National Institute of Advanced Industrial Science and Technology, 6. Geo-Research Institute, 7. Earthquake Research Institute, University of Tokyo

筆者らは、過去の地表面温度履歴の推定のために、これまで東京地域、大阪地域、バンコク地域、ベルリン地域で地下温度分布の測定を行ってきた。本発表では、これらのデータの中から地下水流動の影響が極めて小さいものを地下温度分布の形状から抽出したうえで、東京地域で2地点、大阪地域で6地点、バンコク地域で6地点、ベルリンで8地点のデータをもとに過去数百年間の地表面温度履歴を推定した結果を紹介する。この解析では、地質柱状図から地層境界を区分し異なる熱物性を考慮した多層モデルによる解析を行った。ただし地下への熱熱輸送は熱拡散のみを想定した。

解析した全ての地表面温度履歴の推定結果からこの百年間で地表面の温度上昇が明らかになった。これらの温度上昇の幅は場所によって異なり0.4Kから5.0Kまでである。その傾向として都市の温度上昇の方が農村地域に比べて大きい。このような傾向は都市化の程度や人間活動の違いを反映していると思われる。

キーワード：地下温暖化、ヒートアイランド、地球温暖化、地表面温度、都市化

Keywords: subsurface warming, heat island effect, global warming, ground surface temperature, urbanization

# On the thresholds of withdrawal-to-availability ratio: a perspective from a global hydrological simulation including groundwater

\*Hanasaki Naota<sup>1</sup>

\*Naota Hanasaki<sup>1</sup>

1. 国立環境研究所

1. NIES National Institute of Environmental Studies

Withdrawal to availability ratio (WTA) is a widely accepted empirical index to express water stress in the world. It accompanies two empirical thresholds or the regions where WTA exceeds 0.2 and 0.4 are categorized as medium and high water stress respectively, but the rationale of these thresholds has been little explained. Here we show these thresholds are linked with physical water scarcity using a state of the art global hydrological model. The model enables us to simulate global water supply and demand at the spatial resolution of  $0.5^\circ \times 0.5^\circ$  at a daily temporal interval with distinction of seven water sources including groundwater. From the simulation results, we obtained the relationship between WTA and the fraction of water abstraction from local and renewable sources to all (FLRE). We found that when WTA exceeds 0.2 and 0.4, FLRE shows a sudden drop in FLRE or the regions require additional non-local and/or nonrenewable water sources. The results support the general validity of WTA and the threshold as an index to assess water scarcity. At the same time, they also call the users attention that considerable spread between WTA and FLRE: WTA could be a surrogate of FLRE in limited extent

キーワード：水資源

Keywords: water resources

# Groundwater over-exploitation and terrestrial water storage change: A global analysis using hydrological models and GRACE

Farshid Felfelani<sup>1</sup>, \*Yadu N Pokhrel<sup>1</sup>

1. Department of Civil and Environmental Engineering, Michigan State University, East Lansing, MI, USA

In this study, we use different spherical harmonic products from the gravity recovery and climate experiment (GRACE) satellite mission and the results from two state-of-the-art hydrological models that explicitly simulate groundwater extractions to (1) examine the variations in terrestrial water storage (TWS) and its individual components, (2) attribute the changes in TWS to natural and human-induced factors, especially groundwater overexploitation, over a range of global river basins, and (3) assess the performance of different GW schemes incorporated in two models. Analysis of the spatial patterns of the long-term trend in TWS from the two models and GRACE suggests that both models capture the GRACE-measured direction of change, but differ from GRACE as well as among each other in terms of the magnitude over different global regions. A detailed analysis of the seasonal cycle of TWS variations shows notable differences not only between models and GRACE but also among different GRACE products and between the two models. The isolation of natural and human-induced changes in TWS in some of the managed basins reveals a consistently declining TWS trend during 2002-2010 caused primarily by groundwater overexploitation, however; significant differences are again obvious both between GRACE and models and among different GRACE products and models. Results from the decomposition of the TWS signal into the general trend and seasonality indicate that while one model doesn't capture the long-term trend which dominates the original time series over the basins impacted by continuous drought and long-term GW storage depletion, the other model fails to estimate the seasonality in snow-dominated basins.

Keywords: Groundwater over-exploitation , Terrestrial water storage, Hydrological models, GRACE, Human impacts

## Simulating large-scale groundwater table fluctuations : An application to the Community Water Model (CWATM)

\*佐藤 雄亮<sup>1</sup>、ピーター ブレック<sup>1</sup>、ピーター グレーブ<sup>1</sup>、タヘル カヒル<sup>1</sup>、和田 義英<sup>1,2,3,4</sup>  
\*Yusuke SATOH<sup>1</sup>, Peter Burek<sup>1</sup>, Peter Greve<sup>1</sup>, Taher Kahil<sup>1</sup>, Yoshihide Wada<sup>1,2,3,4</sup>

1. 国際応用システム研究所、2. ユトレヒト大学、3. ゴッダード宇宙研究所、4. コロンビア大学

1. International Institute for Applied Systems Analysis, 2. Department of Physical Geography, Utrecht University, 3. NASA Goddard Institute for Space Studies, 4. Center for Climate Systems Research, Columbia University

Groundwater is widely utilized as a valuable water resource, and currently, more than one-quarter of global population heavily relies on groundwater. Recently, many studies report depletion of groundwater resources due to overexploitation, especially in major irrigated areas and highly populated areas, indicating the use is no longer sustainable. The pressure to groundwater resource will increase in future, as it is expected that water demands will increase driven by a growing population and economic development. Climate change will also affect water availability and groundwater recharge. Thus it is an urgent issue to assess and appropriately manage groundwater resource, regarding water and food security and sustainable development. Also, groundwater plays a significant role in the hydrological cycle, and it is indispensable for the ecological and biophysical cycle.

Studies of groundwater dynamics at the global scale are significant in order to understand global environmental issues. They require a better understanding of impacts of changing the climate and anthropogenic activity, such as groundwater pumping and land use change, and feedback to them. Although there are numbers of local or regional studies that discuss groundwater dynamics with models, such as LEAFHYDRO and MODFLOW, however, still only few global models can represent the depletion of groundwater resource. To our knowledge, two hydrological models (PCR-GLOBWB, WaterGAP2.2a) can simulate variability of groundwater storage and two land surface models HiGW-MAT and MATSIRO-GW represents dynamics of groundwater table.

The purpose of this study is to introduce dynamic groundwater scheme into the Community Water Model (CWATM), a global hydrological model, which is able to assess changes in accessibility to groundwater resource and to investigate its impact on water and heat exchange at the surface through soil moisture, simulating the dynamic behavior of groundwater table. As well as the groundwater table, CWATM is going to include water quality module and hydro-economic module to provide a portfolio of economically optimal solutions for future water problems. CWATM is an integrated global hydrological model developed to assess how water availability and water demand will look in future under changing climate and socio-economic condition. Therefore it includes both components and it is designed to run at different scales from local to global. CWATM is open source and a community-driven model. Thus its specification is user-friendly and flexible enough to implement/link new modules.

The dynamic groundwater table scheme is developed as an external module of current CWATM's hydrological module. Originally, it has a groundwater reservoir under three soil layers. The explicit description of groundwater table variabilities enables us to quantify deterioration of accessibility to groundwater resource. Eventually, with hundreds-years long-term simulations, this modeling framework will provide insights of past and future impacts of climate change and anthropogenic activities on the variability of groundwater table, respectively. Taking the accessibility to groundwater resource into account, we will evaluate how effective solutions are to decrease water demand, such as improvement of

water use efficiency and better timing of groundwater use to control groundwater table depression. Furthermore, given these solutions, the assessment is going to reveal a time scale to restore depressed groundwater to its sound state to achieve sustainable water use.

キーワード：地下水資源、地下水面、全球モデル、気候変動、人間活動影響

Keywords: Groundwater resource, Groundwater table, Global model, Climate change, Anthropogenic impact

# On the behavior of reservoir operation in a global hydrological model under multiple meteorological forcing

Yoshimitsu Masaki<sup>2</sup>, \*Naota Hanasaki<sup>1</sup>

1. NIES National Institute of Environmental Studies, 2. Hirosaki University

We performed an intercomparison of simulated river discharge using the H08 hydrological model with four meteorological forcing datasets to investigate regulatory dam functions on river flow. An intensive case-study was performed at Fort Peck Dam on the Missouri River. Results demonstrated that dam-regulated river flow reduces the temporal variability for large time periods (smoothing effects). Consequently, this dampened the natural variability present within the meteorological forcing data. We also observed that during wet years, occasional floods pass through the dam control. This was attributed to simulated dam overflow and resulted in a distinctive hydrograph shape downstream of the dam (pulsing effects), which created divergences between simulated peak flow discharges for the different meteorological datasets. To confirm whether the pulsing effects were commonly seen globally, we evaluated other major dam sites. The results showed that the differences in the magnitude of simulated peak flow between the meteorological forcing datasets increased downstream at 37 of 47 global major dam sites for wet years. Depending upon the meteorological forcing data, dams act as a selective filter against peak flow events. That is, dams nonlinearly magnified differences in meteorological data and produced large uncertainties in regulated river discharge primarily downstream of dams.

Keywords: water resources, dam