

Seismic gravity changes of the 2004 Sumatra-Andaman earthquake and static gravity anomaly

*Yusaku Tanaka¹, Kosuke Heki¹


1. Graduate School of Science, Hokkaido University

The 2004 Sumatra-Andaman earthquake (Mw9.1-9.3) is the first very large earthquake after the launch of the GRACE satellites in 2002. The results of the time series analysis of postseismic gravity changes indicate that those of the 2004 Sumatra-Andaman earthquake have almost ended. This is the first two-dimensional observation result of total seismic gravity changes.

These observation data may also allow us to research interseismic gravity changes because (1) the static gravity anomaly is formed by the repeat of inter-, co-, and postseismic gravity changes and (2) the data of the static gravity anomaly have been given and co- and postseismic gravity changes of one earthquake have been observed.

In my presentation, I will show several observation results and explain the details of what I wrote above.

Keywords: coseismic gravity changes, postseismic gravity changes, interseismic gravity changes, GRACE, The 2004 Sumatra-Andaman earthquake, earthquake cycle

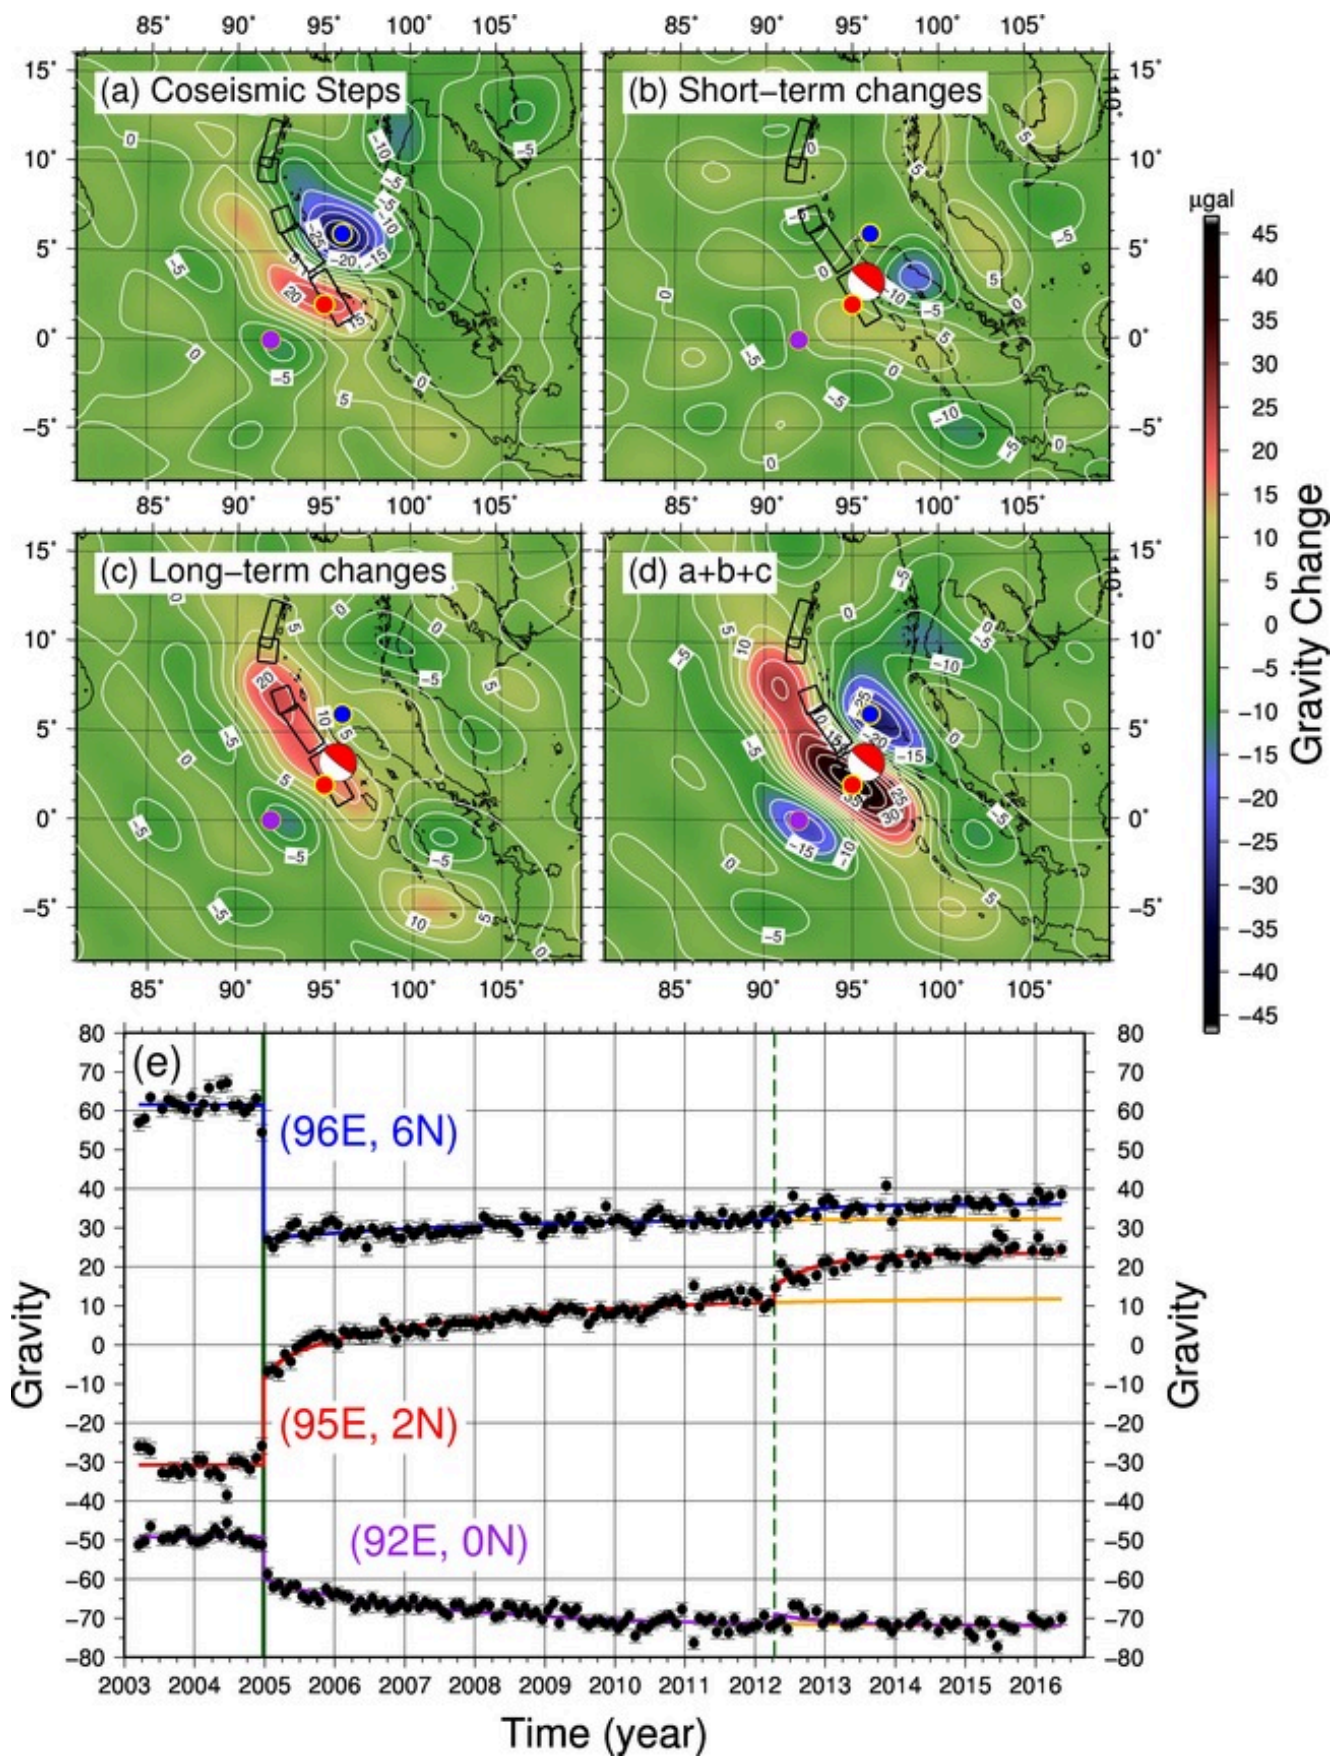

Water mass variation in the Japan Sea from satellite gravimetry: Comparison with seasonal movements of GNSS stations

*Suguru Doto¹, Kosuke Heki¹

1. Department of Natural History Sciences, Graduate School of Science, Hokkaido University

Fifteen years have passed since the gravity satellite GRACE (Gravity Recovery and Climate Experiment) was launched by NASA/DLR in 2002. Most of the past researches focused on the land area, but it is gradually becoming possible to discuss the time-variable gravity in the ocean. The Red Sea is located between the Arabian Peninsula and Africa. Wahr et al. (2014) studied seasonal gravity changes there by combining the seasonal gravity change from GRACE with satellite altimetry and various in-situ data, and found that the seasonal ocean mass changes are driven by wind stress exerted near the strait connecting the Red Sea with the Indian Ocean. We also analyzed seasonal changes around the world oceans using GRACE data 2002-2016, and found significant seasonal variability in the Arctic Sea, Hudson Bay, Arafura Sea, Japan Sea, etc. Here, we focus on the Japan Sea.


To analyze the gravity changes, we used of the Stokes' coefficients with degrees and orders complete to 60 from the Level-2 RL-5 data released by CSR, University of Texas, and applied the de-stripping filter and the Gaussian filter with average radius of 300km. In our previous report (Doto & Heki, Geod. Soc. Japan, Fall Meeting, 2016), we analyzed data from GSM files, in which the oceanic and atmospheric mass changes are supposed to be removed using various geophysical models. In the present study, however, we added back the values in GAD files to recover the originally observed gravity changes in the ocean. In the GSM files, the gravity maximum occurred in November and the minimum occurred in June in the Japan Sea, and the peak-to-peak amplitude was ~10 cm in equivalent water depth. In the GSM + GAD files, however, the maximum and the minimum moved to October and February, respectively, and the amplitude decreased to ~4 cm (Fig.1). This means that the non-tidal mass change model used to make the GAD files is wrong at least in the Japan Sea.

We compared the GRACE data with the average seasonal variation of the sea surface height using the tide gauge data at the Tobishima and Okushiri (both in Japan Sea) observatories. The tide gauge showed the amplitude ~5 times as large as the GRACE data with maximum in August and September. This result suggests that the sea surface height changes mainly reflect thermal expansion of warm water above the thermocline rather than the real change of the amount of sea water.

Seasonal gravity changes also occur above the land area of Northeast Japan, and its maximum (February to March) suggest that it comes from snowpack in winter. GNSS stations in NE Japan often show clear seasonal movements, and a large part of them comes from the seasonal load, i.e. snow on land and sea water in the Japan Sea. We try to validate the GRACE results by comparing them with the GNSS data on land.

Figure 1: Gravity deviation in October compared with February, converted to equivalent water depth from the GRACE data. We can see the positive deviation in the Japan Sea.

Keywords: GRACE, Water mass variation, Japan Sea, Crustal deformation, GNSS

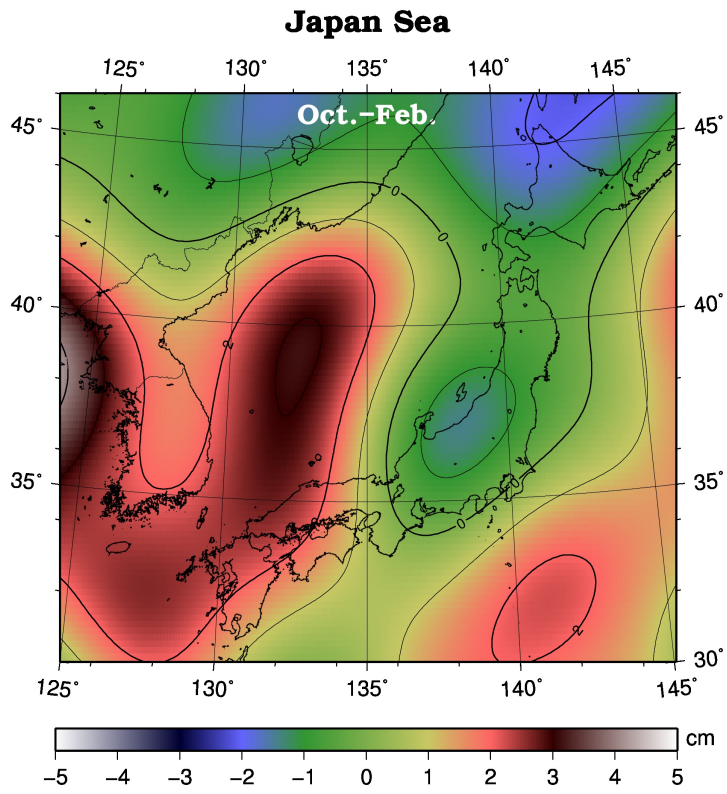

Distributions of elevation-gravity anomaly of subduction zones its mechanical implication

*Yuto Iwase¹, Ryoya Ikuta¹

1. Shizuoka Univ.

We classified the global subduction zones based on their gravity and topography distribution to consider the possibility of huge earthquakes.

We used elevation data of Global Bathymetric Chart of Ocean (GEBCO) and Free-air gravity anomaly of World Gravity Map (WGM) by International Gravimetric Bureau (BGI), and volcanic eruption catalogue by National Oceanic and Atmospheric Administration (NOAA).

First, we divided all global subduction zones into shallow and deep ones.

The subduction zones with their trench depth shallower than 6000 m generate M8 or greater earthquakes everywhere. Spatial variation of the gravity anomaly and the elevation around these trenches are so small that further classification based on gravity and topography is difficult. Gravity anomaly is suppressed for the buoyant young lithosphere with shallow trench because Isostasy would be easily established due to its relatively flexible lithosphere.

In contrast, the subduction zone where the trench is deeper than 6000 m does not cause frequent great earthquakes of M8. However, we experienced two M9-class huge earthquakes at off the coast of Tohoku and off Kamchatka Peninsula included in this group. It is impossible to classify the possible source area of huge earthquakes only by the depth of the trench. We divided variation patterns of gravity anomaly around the deeper trenches into four types: 1-a. Steep and monotonic increase from trench toward arc (1 deg or less before reaching the maximum value). 1-b Slow and monotonic increase (larger than 1 deg to reach the maximum value). 2. A small peak with a trough behind it before increase toward arc. 3. Mismatch of trench and gravity minimum: Minimum gravity occurs at arc-side of the trench. Among these four groups, slow and monotonous increase include subduction zones that have ever caused earthquakes of M8 or greater (Japan, Kamchatka, Tonga, northern and middle Chile).


Scatter plot between distances of gravity maximum and volcanic front from trench shows a positive correlation between them. Since the trench distance of volcanic front corresponds to inverse subduction angle, distant gravity peak corresponds to gentle subduction angle of the slab.

Bassett and Wasst (2015) proposed a trench-parallel fore-arc ridges (TPFRs) induced from gravity anomaly and topography. They used deviatoric values of gravity (TPGA=Trench parallel gravity anomaly) and topography (TPTA=Trench parallel topography anomaly) from trench-distance ensemble average for each subduction. They proposed that the down dip limit of inter-plate seismogenic zones corresponds to location of TPRF. This is because stress concentration at the down-dip limit by inter-plate coupling during inter-seismic period cumulate a plastic deformation just above it, which develops TPRFs. They advocate that TPRF is useful as an index for evaluating earthquake potential. Some of the peak gravity locations obtained in this study correspond to that of their TPRFs. This suggests that TPRFs can be seen even in the case of absolute value and there was no big difference as distribution. Furthermore, in our study, the peak of gravity anomalies appears in the fore arc in all of the subduction zones deeper than 6000 m in contrast

that Basset and Wasst (2015) do not necessarily show TPF for all the trench. Although their subtraction of ensemble average should well emphasize along-trench perturbation for relatively uniform angle subduction zone, subduction zone whose slab angle varies laterally may generate apparent variation of TPGA and TPTA preventing to see actual perturbation due to inter-plate coupling.

As a future research, I will investigate the relationship between the peak of gravity anomaly and seismic activity.

Keywords: subduction zones, huge earthquakes, Free-air gravity anomaly, Elevation, TPFs

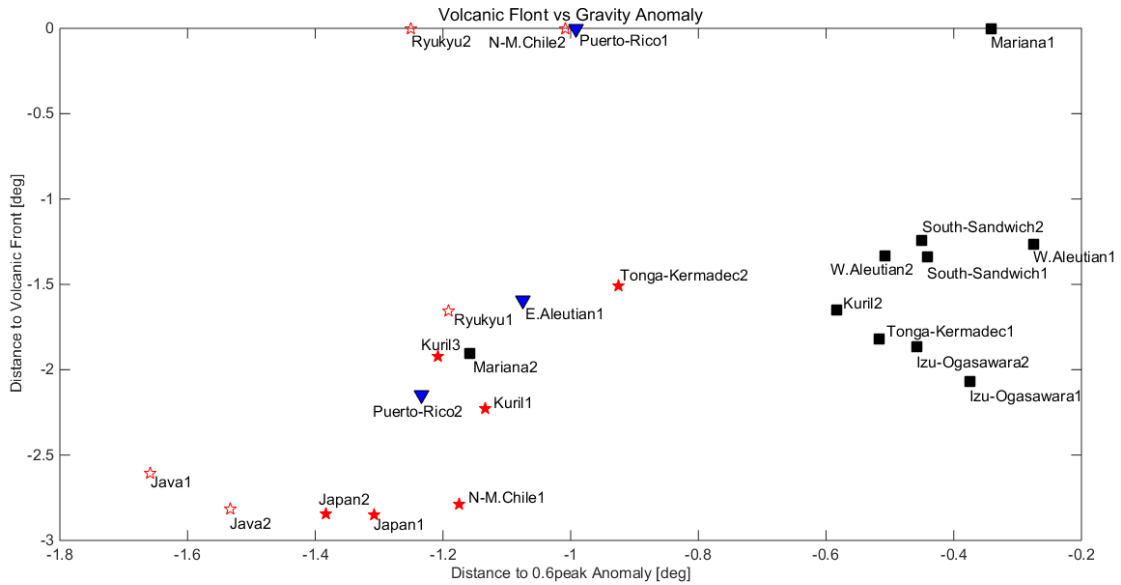

Major earthquakes resulting in gravity changes detected by GRACE

*Benjamin Fong Chao¹, Jen-Ru Liao^{1,2}

1. Inst. of Earth Sciences, Academia Sinica, Taiwan, 2. Dept. of Earth Sciences, National Central Univ., Taiwan

The twin-satellite mission - Gravity Recovery and Climate Experiment (GRACE) launched in 2002 measure the time-variable gravity (TVG) field. We analyze the GRACE data to study the TVG due to earthquake faulting and the associated mass dislocations in the Earth. Most GRACE TVG signals are directly related to changes in surface processes, primarily the water cycle. So we first strive to remove the terrestrial water signal using the Global Land Data Assimilation System model outputs and the seasonal (annual and semi-annual) signals by the least-squares estimation. Then we apply the method of Empirical Orthogonal Function (EOF) analysis to extract the earthquake-induced TVG signals in the epicentral region in terms of change pattern and time evolution. Our EOF results corroborate past findings of the GRACE TVG signals caused by the greatest recent earthquakes not only for co-seismic but also post-seismic behavior. We do so notably for the 2004 Sumatra-Andaman (Mw 9.1), 2010 Chile (Mw 8.9), and 2011 Tohoku (Mw 9.0) events, as well as somewhat smaller earthquakes including the 2005 Nias (Mw 8.5) event otherwise largely masked by the 2004 Sumatra-Andaman signals, the 2007 Sumatra (Mw 8.5) event, the 2012 Sumatra (double event of Mw 8.2 and 8.6 in one day) event which is largely strike-slip, and even possibly the 2013 deep-focused Okhotsk (Mw 8.3) event. We also conduct least-squares fitting with a co-seismic step function representing the earthquake for every grid point in the considered region, to augment to and confirm the EOF results. Furthermore, assuming a point-source double-couple dislocation and a spherically symmetrical Earth, the earthquake-induced displacement field is expanded by spherical harmonics where components of order greater than 2 vanish. We transform the epicenter to the North Pole in the canonical coordinates and could duplicate the whole TVG signal by spherical harmonics up to degree 60 but only order 2, which accentuates the EOF and least-squares fitting results that are approximated by co-seismic double-couple phenomena.

Keywords: earthquake, gravity change, Gravity Recovery and Climate Experiment (GRACE), Empirical Orthogonal Function (EOF)

Implementation of Domestic Comparison of Absolute Gravimeters Ishioka Geodetic Observing station and construction of Japan Gravity Standardization Net 2016 (JGSN 2016)

*Chiaki Kato¹, Kenji Yoshida¹, Yoshifumi Hiraoka¹, Toshihiro Yahagi¹

1. GSI of Japan

Geospatial information authority of Japan (GSI) has held the Domestic Comparison of Absolute Gravimeters (DCAG) annually since 2002 with several domestic organizations which own absolute gravimeters. By comparing with the results of the FG5 absolute gravimeters, which is operated by the National Institute of Advanced Industrial Science and Technology (AIST) and routinely participate in International Comparison of Absolute Gravimeters supported by BIPM, we could expect to confirm the consistency of our equipment with international standard.

While DCAG had been held at a hotel located in Mt. Tsukuba area until 2015, it was done at GSI's new Ishioka Geodetic Observing Station (Ishioka city, hereinafter referred to as Ishioka station) in 2016. Since Ishioka station has a special room for DCAG as described later, it is expected that we can conduct DCAG much more precisely under better environment.

The gravity measurement facility of Ishioka station is very unique in several respects. It is firmly coupled to the support layer with a plurality of concrete piles and its base plate is isolated from the building in order to reduce the effect of ground vibration. It is designed to set up six absolute gravimeters simultaneously on each points which have precise coordinates decided by GNSS and leveling before the construction. Since Ishioka station also has the VLBI facility, we can utilize the distributed hydrogen maser's signal to minimize clock errors between absolute gravimeters. Of course, we can expect less artificial noise because of its suburban location. Thanks to those improvements, we successfully achieved good results in the latest DCAG within the range of instrumental error.

GSI has released a new Japan Gravity Standardization Network (JGSN) 2016 in March 2017 for the first time in 40 years. It was composed of both absolute and relative gravity measurement data carried out by GSI between 2002 and 2016. On the course of its measurements, we used our FG5 calibrated by DCAG to determine the absolute gravity values. DCAG obviously played a key role in making JGSN2016 highly reliable and consistent with the global gravity standards.

We will report the results of past DCAG and its contribution to the JGSN2016.

Keywords: Domestic comparison of Absolute Gravimeters, FG5 Absolute gravimeter, Japan Gravity Standardization Net 2016

Improvement of method that makes Japanese old and dense gravity data consistent with Japan gravity standardization net 2016

*Takayuki Miyazaki¹

1. GSI of Japan

Geospatial Information Authority of Japan (GSI) have established a new gravity standardization network of Japan, named the Japan Gravity Standardization Net. 2016 (JGSN2016) that is constituted of about 30 absolute measure stations and 200 relative measure station, from the latest land gravity measurements covering the whole country. The accuracy of JGSN2016 is evaluated around 10 micro Gal for absolute measurement and 20 micro Gal for relative measurement in standard deviation. GSI also had conducted relative gravity measurements at benchmarks and some of triangular control points from 1967 to 1993 in order to obtain dense spatial distribution of surface gravity and also utilize them for orthometric height correction of levelling survey. The data obtained by the measurements comes to 14,000 in total, refers JGSN75 and has been utilized for calibration of measurement devices etc. as nationally authorized gravity standard. But these dense gravity data are not consistent with recent measurements referring JGSN2016 and the difference sometimes exceeds range of the measurement error. The maximum difference between JGSN75 and JGSN2016 at the gravity station of GSI is over some 100 micro Gal.

GNSS-derived orthometric height determination has been recently developed. As a result, the importance of land gravity data densely covering the whole country has been gradually increasing because the data has been increasingly utilized as fundamental data for modeling of geoid, a reference surface for orthometric height. The latest, Highly-reliable land gravity data covering the country are essential for improving accuracy and reliability of geoid model. However, it is almost impossible to obtain new data referring JGSN2016 with in short period by newly conducting time- and cost-consuming land gravity measurement for the whole country.

To resolve these problems, we have developed a method that makes Japanese old and dense gravity data consistent with JGSN2016. We reported a solution for that problem in JpGU2016. In the method, we estimated uplift/subsidence displacement of observation station due to crustal deformation, mass redistribution caused by earthquake event and system offset that has existed since establishment of each gravity reference individually. Consequently, we achieve to convert old gravity data to new gravity data in about 40 micro Gal precision. In the method, however, vertical gravity gradient value which is used for convert uplift/subsidence displacement of station to gravity change is assumed that all station have same vertical gravity gradient (Bouguer) value. Therefore spatial variation of vertical gravity gradient is abbreviated.

We newly developed gravity terrain correction program that use 10m mesh DEM data provided by GSI. And we calculated vertical gravity gradient of each station for more precise estimation. In addition, we will present method for calculating displacement of station that takes into account fault geometry and estimation for system offset using data assimilation.

By this research, gravity change that are caused by crustal deformation is estimated. And relation of old and new gravity data is revealed. Thus old and dense gravity data recover accuracy. Consequently, basic data for developing more precise geoid are provided.

Keywords: Japan Gravity Standardization Net. 2016 (JGSN2016)

Absolute gravity measurements in New Zealand (2nd report)

*Yoichi Fukuda¹, Hiroshi Takiguchi², Jun Nishijima³, Takahito Kazama¹, Vaughan Stagpoole⁴, Sergei Gulyaev⁵, Tim Natusch⁵, Matt Amos⁶

1. Graduate School of Science, Kyoto University, 2. National Institute of Information and Communications Technology, 3. Graduate School of Engineering, Kyushu University, 4. GNS Science, New Zealand, 5. Institute for Radio Astronomy and Space Research, Auckland University of Technology, 6. Land Information New Zealand

To enhance and extend the absolute gravity (AG) measurements in New Zealand, we had conducted AG measurements using a FG5 (#210 of Kyoto University) in January and March 2016 as reported in 2016 JpGU meeting. The measurements were made at three points in North Island and five points in South Island. To compliment the AG measurements, we also conducted relative measurements using a LaCoste & Romberg G-meter (#680) at five points from Bilham et al. (2016) in Southern Alps. Among them, two points are located near the summits and only accessible by a helicopter. Thus we could conduct a single loop measurement only, due to restricted time and weather condition in 2016.

Although we have not conducted AG measurements in 2017, relative measurements using two LaCoste & Romberg G-meters (#680 and #805) have been conducted at four points near the summits including the two points occupied in 2016, and conducted two loops of the measurements for those points. In addition to these, we conducted the measurements at most of the AG points occupied in 2016 and some additional points from Stagpoole et al. (2015) for the calibration of the scale factors of the gravimeters, and the gravity connections to the spare points near the AG points. Moreover, for planning the AG measurements in the area of 2016 Kaikoura earthquake (Mw 7.8), we conducted test measurements at a few points where huge uplifts have been observed. In this talk, we present the results in 2017, and the future observation plan particularly in the area of Kaikoura earthquake. This study was partially supported by JSPS KAKENHI Grant No. 15H05205.

Keywords: New Zealand, absolute gravity measurements, gravity network, gravity changes, NZ Southern Alps, Kaikoura earthquake

Comparison of Superconducting and Spring Gravimeters at the Mizusawa VLBI Observatory of the National Astronomical Observatory of Japan

*Satoshi Miura¹, Tae-Hee Kim¹, Hiroshi Ikeda², Yoshiaki Tamura³

1. Graduate School of Science, Tohoku University, 2. Research Facility Center for Science and Technology, University of Tsukuba, 3. Mizusawa VLBI Observatory, National Astronomical Observatory of Japan

Continuous microgravity monitoring is utilized to gain new insights into changes in the subsurface distribution of magma and/or fluid that commonly occur beneath active volcanoes. Rather new superconducting and spring gravimeters, iGrav#003 and gPhone#136 are collocated with a superconducting gravimeter, TT#70 at the Mizusawa VLBI Observatory of the National Astronomical Observatory of Japan, since the end of September, 2016 in order to evaluate those performances before field deployment planned in 2017.

Calibration of iGrav#003 was carried out by collocation with an absolute gravimeter FG5 of the Earthquake Research Institute, University of Tokyo (Okubo, 2016, personal comm.) at a Fundamental Gravity Station in Sendai in July, 2016. Based on the scale factors of iGrav#003 obtained by the calibration and of gPhone#136 provided by the manufacturer (Micro-g LaCoste, Inc.), tidal analyses are performed by means of BAYTAP-G (Tamura et al., 1991, GJI). Amplitudes and phases of each major tidal constituent mutually agree well within $\pm 4\%$ and ± 3 degrees, respectively.

The instrumental drift rate of iGrav#003 is very low, about 5 micro-Gal/month, whereas that of gPhone#136 is very high, about 500 micro-Gal/month. The high drift rate of gPhone#136, however, is well approximated by a quadratic function at present and can be removed. The detrended time series of gPhone#136 shows good agreement with iGrav#003 time series in the overall feature: gravity fluctuations with amplitudes of about a few micro-Gal and with durations of a few days, which may be due to variations in the moisture content of the topmost unsaturated sedimentary layer and the water table height. It suggests that both instruments may capture volcanic signals associated with pressure changes in magma chambers, dike intrusion/withdrawing, and so on.

iGrav#003 will be installed in the Zao volcanological observatory of Tohoku University located at about 3 km from the summit crater, and gPhone#136 will be deployed in the Jododaira Astronomical Observatory located at about 0.5 km from Oana crater of Azumayama volcano in the spring of 2017. Both of the volcanoes, Zao and Azumayama show minor volcanic activity with frequent shallow earthquakes, changes in the total magnetic force, pressure changes at depth, and so on in 2014 and 2015.

Keywords: Gravity measurement, Superconducting Gravimeter, Spring Gravimeters, Collocation

Development of a new portable gravity gradiometer for field measurements

*Sachie Shiomi¹, Kaito Seto¹, Yousuke Kimura¹, Kailun Xue¹, Taichi Hikosaka¹, Syunsuke Watanabe¹, Kou Yamada¹

1. School of Science and Technology, Gunma University

Laser interferometric gravity gradiometers have been expected to be a useful tool for geophysical observation and the basic concepts have been discussed and patented since 1970s. However, they have not been practically applied to field measurements yet. This is mainly because of the technical difficulty in carrying out repeated measurements with precision sufficient for laser interferometry. To overcome the technical difficulty, a new interferometric gravitygradiometer has been developed [1]. In this gravity gradiometer, a pair of test masses located at different heights (the separation is about 70 cm) is thrown up at the same time in a vacuum tank. The differential acceleration between the test masses in free fall is measured by a Mickelson interferometer. This gravity gradiometer is designed to release the test masses quickly and precisely by applying a mounting method developed for an earth orbiting free-fall experiment (Satellite Test of the Equivalence Principle) [2]. This release mechanism was found to be effective for the realisation of precise repeated measurements [1].

The first prototype of the gravity gradiometer was tentatively operated at the Sakurajima Volcanological Observatory of Kyoto University, located on the active volcanic island of Sakurajima, Kyusyu Japan. From this tentative operation, it was found that the instrument was robust against seismic vibration; the resolution was $\pm 0.3 \mu\text{Gal/m}$, which is the same level as that operated at a quiet observation station. This result indicates that this gravity gradiometer could detect local underground activities, which are buried in seismic noise and have not been detected by previous gravimeters. However, the first prototype is heavy (weighs about 200 kg) and it was difficult to install it at the local observatory without crane equipment. We are developing a new laser-interferometric gravity-gradiometer that is designed to be portable and more practical for field measurements. In this presentation, I will report the status and prospects of the development.

References

[1] S. Shiomi et al. (2012): Development of a Laser-interferometric Gravity-gradiometer, Journal of Geodetic Society of Japan Vol. 58, No.4, pp. 131-139.

[2] S. Shiomi (2002): Test mass metrology for tests of the Equivalence Principle, Ph.D. thesis, The University of Birmingham, Edgbaston, Birmingham, UK.

Keywords: gravity gradiometer

Monte Carlo Simulation of Gravity Gradient for Observing Volcanic Activity

*Kailun Xue¹, Sachie Shiomi¹, Kaito Seto¹, Yousuke Kimura¹, Kou Yamada¹

1. Division of Mechanical Science and Technology, Faculty of Science and Technology, Gunma University

Attempts to detect mass distribution changes, associated with volcanic activity, by measuring gravitational fields have been done since the 1920s in Japan. Measurement was done by using the gravity-variometer, such as the torsion balance on the Sakurajima volcano. In the early 1990s, Absolute Gravimeter (FG 5) of Micro-g LaCoste Company, which is simple to use and lightweight, became popular in field measurements. The absolute gravimeter has a resolution of 10^{-8} m/s² level when used at a quite observation station. When observing volcanic activity with an absolute gravimeter, it is possible to estimate the height of the magma head from gravity change. However, the absolute gravimeter is sensitive to environmental disturbances, and the error is thought to mislead the height of magma head by several hundred meters.

The instrument we are developing is a new gravity gradiometer. The gravity gradiometer can measure vertical gravity gradients with a resolution of 10^{-9} 1/s² level at an observation station with seismic vibration. In this gravity gradiometer, two test bodies are thrown upward at different heights in a vacuum tank at the same time, and the difference between the free fall acceleration of the two test bodies is obtained by a Michelson interferometer. Gravity is proportional to $1/r^2$ and the gravity gradient in the vertical direction is proportional to $1/r^3$, where r is the distance between the gravitational source and the instrument. Therefore, the gravity gradiometer has a better sensitivity to nearby gravity sources, and is suitable for observation of the environmental disturbances, such as rainfall and groundwater fluctuation. Simultaneous observation of the absolute gravimeter and gravity gradiometer at the same observation station could allow us to estimate the displacement of the magma head more accurately.

Assuming a simple volcano model, we have calculated the gravity change by Monte Carlo simulation for Mt. Asama and Sakurajima volcanos, and examined the usefulness of the simultaneous observation of the absolute gravimeter and gravity gradiometer. In this presentation, I will report the results of the simulation and discuss the optimum observation station for the absolute gravimeter and gravity gradiometer.

Keywords: gravity gradient, volcano

Physical modeling of hydrological gravity changes observed by the iGrav-003 superconducting gravimeter in Southeast Alaska

Tomoya Yokoyama¹, *Takahito Kazama¹, Satoshi Miura², Tae-Hee Kim², Yoshiaki Tamura³

1. Kyoto University, 2. Tohoku University, 3. NAO Mizusawa

Crustal uplift of 3 cm/year at a maximum has been observed in Southeast Alaska, associated with glacier melting (Larsen et al., JGR, 2007). The crustal uplift includes (1) the Earth's viscoelastic deformation due to past glacier melting and (2) the Earth's elastic deformation due to present-day glacier melting, and the two effects can be separated by simultaneous observations of crustal deformations and land gravity changes (Wahr et al., GRL, 1995). However, the land gravity data is often disturbed by hydrological variations such as soil water infiltration and groundwater flow, so they need to be corrected from the original gravity data in order to understand the gravity signals due to glacier melting quantitatively. In particular, spatiotemporal water distributions near gravity sites should be modeled accurately, because most of the hydrological gravity disturbances are dominated by time variations in attraction force due to water mass around gravimeters.

We thus modeled the local water balance and consequent gravity changes at the EGAN gravity site in Juneau, Southeast Alaska, and compared the modeled gravity with the hydrological gravity disturbances observed by the iGrav superconducting gravimeter (serial number: 003). We first estimated the spatiotemporal distributions of soil water and groundwater around EGAN using the G-WATER [3D] software (Kazama et al., JGR, 2015), and calculated the time variation in attraction force ($g_1(t)$) by the spatial integral of the water mass distributions. We also estimated the attraction effect of lake water in Auke Lake (120 m from the gravimeter; 0.65 km²) and accumulated snow on the site facility ($g_2(t)$ and $g_3(t)$, respectively), using the observed data of lake water level and snow depth. We finally calculated the total gravity value to be $g_{cal}(t) = g_1(t) + g_2(t) + g_3(t)$, and compared $g_{cal}(t)$ with the gravity change collected by the iGrav gravimeter ($g_{obs}(t)$).

The gravity change due to underground water ($g_1(t)$) had the highest amplitude of about 4 microGal in peak-to-peak, whereas the amplitudes of both $g_2(t)$ and $g_3(t)$ are about 1 microGal. The sum of the three effects (i.e., $g_{cal}(t)$) agreed with $g_{obs}(t)$ observed from September to December 2012, in terms of rapid gravity increase during precipitation events and gradual gravity decrease after the events. However, the amplitude ratio of $g_{cal}(t)/g_{obs}(t)$ was only 30% if the small value of $\sim 10^{-8}$ m/s was chosen for soil permeability in modeling underground water variations; strong capillary force in the low-permeability soil leads to high steady water content, and all of precipitation cannot infiltrate into the soil during the precipitation events because of little porosity left. We thus re-calculated the underground water distributions and consequent gravity changes ($g_1(t)$) using six different permeability values, and found that the amplitude ratio of $g_{cal}(t)/g_{obs}(t)$ became the highest value of 55% when the permeability value of $1.5 \cdot 10^{-6}$ m/s was used in the G-WATER modeling. The permeability value is consistent with that of glacier silt, which is assumed to spread around the EGAN gravity site. The remaining 45% difference between $g_{obs}(t)$ and $g_{cal}(t)$ may lie in soil heterogeneity and/or regional hydrological variations, so direct measurements of soil parameters around EGAN are needed in the future, in addition to gravity calculations utilizing wide-area hydrological model such as GLDAS and WaterGAP.

Keywords: hydrological gravity change, superconducting gravimeter, iGrav, glacier, soil water, groundwater

Constraining the focal mechanism of the 2015 Gorkha earthquake by using the continuous gravity observations

*Ying Jiang¹, Ziwei Liu¹, Xiaotong Zhang¹, Hui Li¹

1. Key Laboratory of Earthquake Geodesy, Institute of Seismology, China Earthquake Administration

The amplitudes of the Earth's free oscillations have a close relationship to earthquake focal mechanisms. Focal mechanisms of large earthquakes can be well analyzed and constrained with observations of long period free oscillations. On 25 April 2015, a magnitude Ms 8.1 interplate thrust earthquake ruptured a densely instrumented region of Gorkha. After Earthquake, the focal mechanism solutions of Gorkha earthquake were provided by well-respected international earthquake research institutions based on different data and methods, which were different. We compared free oscillations observed by 18 spring gravimeters of continuous gravity stations with synthetic normal modes corresponding to 3 different focal mechanisms for the Gorkha earthquake, and the focal mechanisms solutions of Gorkha earthquake were analyzed and constrained by spherical normal modes in a 2 to 5 mHz frequency band. Based on the best focal mechanisms solution, the accurate magnitude was searched. The results show that the focal mechanism of Gorkha earthquake can be estimated by spherical modes in the 2 to 5 mHz frequency band. The synthetic modes corresponding to the focal mechanism determined by the Gcmt Moment Tensor Solution showed agreement to the observed modes, the average of misfit factors F was 0.03, and the average of scaling factors was 1.04, which was closest to 1, suggesting that earthquake magnitudes predicted in this way can reflect the total energy released by the earthquake. Based on the focal mechanisms solution provided by Gcmt, keeping the strike, dip, slip, depth constant, adjusting the scalar moment, the real scalar moment was searched. When the average of scaling factors was 1, the average of misfit factors F was only 0.03. After calculation, the scalar moment of Gorkha earthquake was 8.09×10^{20} Nm, and the corresponding magnitude was Mw7.91.

Keywords: Gorkha earthquake, Focal mechanism solutions, Earth's free oscillations, Gravimeter observations

Joint inversion of receiver function and gravity data for crustal thickness and velocity ratio

*Lei Shi¹, Lianghui Guo²

1. IGP Institute of Geophysics, China Earthquake Administration, 2. China University of Geosciences (Beijing)

The H- κ stacking technique in receiver function analysis is popular for estimating parameters of crustal thickness (H) and velocity ratio (κ), and has been widely applied in many areas. However, ambiguities occur in the result of this technique when the phases of multiple waves are not clear, or the structure beneath the station is complicated, resulting in difficulty for picking out optimum H and κ parameters from the H- κ stacking map. In this paper, based on the previous studies, we simplified and improved the algorithm of joint inversion of receiver function and gravity data, to decrease the ambiguities and enhance the precision and efficiency. Herein, the Bouguer gravity anomaly is considered to be composed of the Moho gravity anomaly and the crustal gravity anomaly, in which the former one is related to the crustal thickness and the latter is closely related to the crustal density and velocity ratio. According to the relationship between the gravity anomaly and the H and κ , the Bouguer gravity anomaly can be inverted by using the likelihood estimation approach to obtain the H and κ parameters. The gravity inversion utilizes the initial H and κ parameters from both the gravity interface inversion and the H- κ stacking of receiver function, while its inverted results are used to constrain the H- κ stacking of receiver function. The principle and work flow of the joint inversion between receiver function and gravity data are presented in details in the paper. Tests on both the synthetic data and the real data from the northeastern margin of the Tibetan Plateau demonstrated that the presented approach could effectively decrease the ambiguities with high precision and efficiency.

Keywords: gravity, H-K stacking, Joint inversion

Evaluation of INS/GNSS Integration for Gravimetry with UAV

*Cheng-An Lin¹, Chung-Yen Kuo¹, Kai-Wei Chiang¹

1. National Cheng Kung University

The airborne gravimetry system based on Inertial Navigation System and Global Navigation Satellite System (INS/GNSS) integration has been successfully developed to observe the gravity field and estimate the gravity disturbance, which is defined as the difference between the actual gravity and the normal gravity, with the accuracies of approximately 3–4 mGal for vertical component. This technique is more cost-effective than terrestrial gravimeters, and provides higher resolution than satellite missions. Therefore, it currently contributes to geodetic applications and Earth sciences. However, the present airborne gravimetry systems have some shortcomings. It is expensive to rent an aircraft for surveying, and strict rules and regulations exist for acquiring permission to conduct a flight mission. The availability and flexibility of conducting small area surveys or spatial information collection are limited. In addition, detecting short wavelength gravity signals has become a challenge because higher altitude would cause a decrease in the gravity magnitude. Generally speaking, decreasing the altitude of the system is an easy and direct way to overcome these problems.

This research integrates a navigation-grade INS and GNSS for gravimetry based on the use of Unmanned Aerial Vehicle (UAV). The advantages include its high maneuverability and operational flexibility, and it is an intermediate system between the aerial and terrestrial survey in terms of coverage and resolution. The preliminary results show that the internal accuracies of horizontal and vertical gravity disturbance at crossover points are approximately 6–11 mGal and 4 mGal, respectively, with a 0.5-km resolution. As expected, the accuracy in down component is higher than that in horizontal components because the orientation errors could cause large error in horizontal components. The capability of INS/GNSS integration for gravimetry with UAV from determining and de-noising processing has been evaluated in this research.

Keywords: INS, GNSS, Gravity disturbance, UAV



Estimation of Groundwater Content in Mingzhu Basin by Combination of Gravimetry and Electrical Resistivity Tomography

*ChunMin Shih¹, Shen Yu Hsiao¹, LiChun Tseng¹, LiPing Li¹, Chang Jung Chieh¹, FENG SHIH LIN¹

1. National Chung Hsing University

We combine the technologies of gravimetry and electrical resistivity tomography (ERT) to estimate the groundwater content in Minzhu Basin (Fig A). Gravimetry and ERT are used to observe mass variations and groundwater levels, respectively. Four joint surveying missions combining gravimetry and ERT have been carried out in September and December in 2016, and also will be carried out in March and June in 2017, respectively. On field surveys of gravimetry, we use the absolute gravimeter FG5 and relative gravimeter CG5 to collect the gravity observations at 16 gravity stations in Minzhu Basin (Fig B); on field surveys of ERT, we will lay 7 surveying profiles on both sides of Jhuoshuei River to collect the ERT observations. The gravimetry-derived and ERT-derived data will be combined with the data of 5m resolution DEM (Fig C) and ground water wells in Minzhu Basin area in order to estimate groundwater changes during the period from September 2016 to June 2017. The overall goal of this study is to estimate the groundwater content in Minzhu Basin during 2016~2017. To reach this purpose, the following issues have to be considered in advance: (1) analyze the suitability of the gravity and ERT observing stations; (2) determine the best geological density; (3) analyze the influence of gravity observation distance on groundwater change; (4) analyze the influence of groundwater level change on gravity values.

Keywords: Gravimetry, Electrical Resistivity Tomography, Groundwater Content

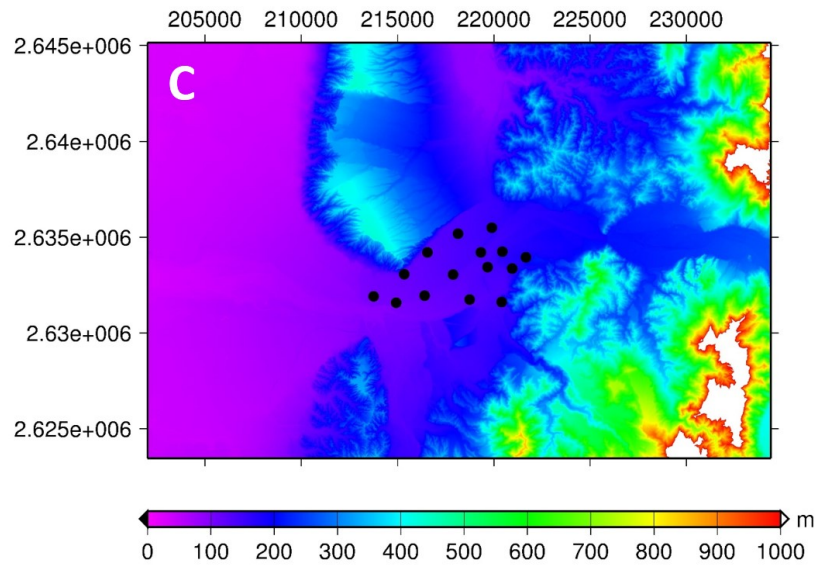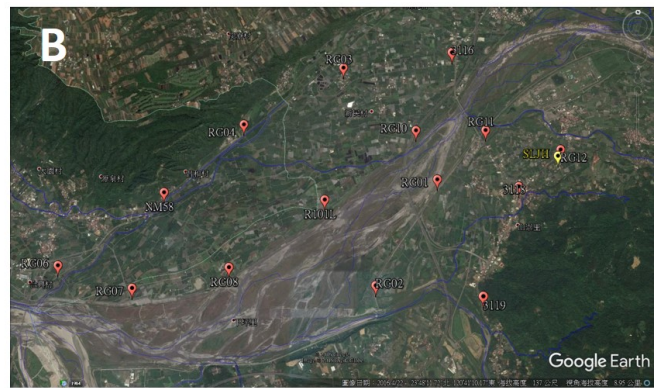

Combined use of a superconducting gravimeter and Scintrex gravimeters for hydrological correction of precise gravity measurements - A superhybrid gravimetry

*Yuichi Imanishi¹, Kazunari Nawa², Yoshiaki Tamura³, Hiroshi Ikeda⁴, Ryo Honda⁵, Takashi OKUDA⁶, Makoto OKUBO⁷

1. Earthquake Research Institute, The University of Tokyo, 2. AIST, 3. NAOJ, 4. University of Tsukuba, 5. MFRI, 6. Nagoya University, 7. Kochi University

Precise gravity observations are often subject to influence of temporally variable distribution of underground water near the observation sites. It is in general difficult to model and correct such effects from the observed gravity series, because it requires knowledge of the hydrological nature of the underground which varies from place to place. The superconducting gravimeter CT36 at Ishigakijima, Okinawa, Japan also experiences very complicated effects of underground water, apparently combined with the atmosphere and the ocean. Effects of the fluids near the surface on gravity must be precisely corrected so that the possible gravity signals associated with the long-term slow slip events occurring near the Ryukyu trench can be detected.

To overcome this difficulty, we employ combined use of the superconducting gravimeter (SG) and Scintrex CG-5 gravimeters. The latter are used as mobile instruments, measuring relative gravity values with respect to the SG pier as in a local gravity survey. One of the advantages of the CG-5 gravimeter is that it enables continuous measurements and therefore comparison with the SG, thus greatly mitigating the problems of instrumental drift inherent to mobile gravimeters. Under the assumption that temporal gravity changes are common within the survey area, using the SG data as reference helps improving estimates of the local gravity field significantly.

We made an experiment of this kind of measurements (which we term superhybrid gravity measurements) using two CG-5's at Ishigakijima in January 2017. Preliminary analysis of the data has shown that relative gravity values at a particular point measured on different days were in agreement at 1 microgal precision. We will present further results and discuss temporal changes of gravity in relation to the dynamics of underground water.

Keywords: superconducting gravimeter, Ishigakijima, underground water, superhybrid gravimetry

The relationship between groundwater level and soil moisture for reduction of gravity disturbance.

*Toshiyuki Tanaka¹, Ryo Honda¹

1. Tono Research Institute of Earthquake Science, Association for the Development of Earthquake Prediction

Tono Research Institute of Earthquake Science (TRIES) has been conducting continuous gravity observations in and around the Mizunami Underground Research Laboratory (MIU) aiming at the detection of earthquake-related gravity change. Quantification of gravity disturbances caused by groundwater level (or pore pressure) fluctuations has been refined by previous studies (Tanaka et al. 2006 G-cubed; 2013 EPS; under review). In particular, the primary factor of the gravity change in the order of a day or less, which is important in monitoring of crust activity, is precipitation (or unconfined groundwater level). By the way, in comparison with the groundwater level observation, soil moisture observation is incredibly easy and has much flexibility to install the instruments. Hence, we want to clarify these relationships based on observation data of gravity, groundwater level, and soil moisture, and then want to estimate gravity response caused by rainfall from soil moisture measurement. We have started parallel observations of an unconfined groundwater level (SBS16 borehole), a combined weather observation system including two soil moisture meters (made by Onset Computer Corp.), and a profile moisture meter (made by Delta-T Devices Corp.), at Syobasama Observation Point about 1.3 km away from the MIU site, since the fall of 2016. Meanwhile, continuous observation using gPhone gravimeters has been continuing inside and outside the MIU. At the time of this writing, because of the small amount of data and insufficient processing of collected data, we still have found no high precipitation or groundwater fluctuation events detectable by the gravimeter (approximately 10 mm on hourly precipitation, 30 mm on daily precipitation). However, when hourly precipitation exceeds about 5 mm, the SBS16 borehole is possible to respond on the order of meters in groundwater level. On 13-14 December 2016, there was a maximum 7 mm on hourly precipitation. At this time, in the soil moisture observations, the volume moisture content increased between 0 to 20%. The 0% was at the depth 30 and 40 cm channels of the profile moisture meter. On the other hand, the 20% was at the depth 10 cm channel of the same meter. The 20 cm depth channel of the profile moisture meter and the two soil moisture meters showed about 5% increase in water content volume. To adopt as a substitute observation for groundwater level observation, such the results indicate that the soil moisture meter should be installed and interpreted carefully because of its susceptibility to the setup situation. In future, we want to estimate these mutual conversion coefficients by comparing both groundwater level and gravity observation data after adequate data accumulation. Furthermore, we will aim to utilize soil moisture meter for correction of gravity observation of a place where groundwater level observation is unavailable.

Acknowledgement: Tono Geoscience Center of JAEA permitted and supported our combined weather observation system including soil moisture observations at Syobasama site.

Keywords: soil moisture, groundwater level, rainfall

Local gravity measurement to detect temporal gravity change in Antarctica

*Koichiro Doi^{1,2}, Hideaki Hayakawa¹, Toshihiro Higashi³, Yuichi Aoyama^{1,2}, Yoichi Fukuda⁴

1. National Institute of Polar Research, 2. The Graduate Univ. for Advanced Studies, 3. TerraGrav LLC., 4. Kyoto University

Relative gravity measurements have been carried out at four times since February 2012 at five sites along Yatude Zawa valley in Langhovde, East Antarctica. Yatude Zawa valley locates in the vicinity of the Langhovde Glacier and we intend to detect gravity changes induced by mass change of the Langhovde Glacier and surrounding Antarctic ice sheet.

Metal markers of the measurement sites were constructed on outcrop rocks on February 4th, 2012 in the JARE53 operation (Doi et al. 2015). Simultaneously, relative gravity measurements with a LaCoste & Romberg (LCR) gravimeter G-1110 were conducted at the sites referring an absolute gravity measurement at AGS01 in Langhovde measured on February 3, 2012 (Kazama et al. 2013). After the first relative measurement, three round-trip measurements were conducted at the five sites at November 25, 2012 with LCR G-805, September 16, 2015 with LCR G-805 and December 27, 2015 with LCR G-1110. Gravity increases of a few hundred micro-gals are observed at the all relative measurement sites for approximately four years, although measurement errors at the all sites are greater than 170 micro-gals at the last measurement. We plan to carry out absolute and relative gravity measurements at the same sites again in 2017-2018 austral summer season. We will use multiple relative gravimeters at the relative measurements to improve the measurement accuracy.

In the presentation, we will show the gravity measurements in detail. We also intend to investigate causes of the temporal gravity increase from the aspect of ice sheet mass changes.

Keywords: Relative gravity measurement, Ice sheet mass change, East Antarctica

Gravimetric Connection with CG type Relative Gravimeter in Kamioka

*Ryo Honda¹, Yuichi Imanishi², Yoshiaki Tamura³

1. Mount Fuji Research Institute, Yamanashi Prefectural Government, 2. Earthquake Research Institute, The University of Tokyo, 3. National Astronomical Observatory of Japan, Mizusawa VLBI Observatory

Gravimetric connection was executed in October 2016, between four points in and around the Kamioka Observatory, Institute for Cosmic Ray Research, University of Tokyo (ICRR). The measurement was performed by two relative gravimeters, Scintrex CG-3M (National Astronomical Observatory of Japan) and CG-5 (Nagoya University). Before this measurement, we had found by some experiments that the Scintrex CG type relative gravimeter shows hysteresis like behavior after each transportation. This portable type gravimeter shows gravity decrease of several tens of micro-gal just after any state of tilt, and recovers exponentially (Some CG-3 shows gravity increase, contrary). The recovery time seems to depend on its length of time under the tilted state, and sometimes it takes more than several hours. Taking this feature into account, we carefully performed the gravity connection by continuous measurement.

The gravity stations we connected are as follows. 1) Superconducting Gravity (S.G.) measurement station in the CLIO section, ICRR. 2) Absolute Gravity (A.G.) measurement station just ten meters away from the S.G. station. 3) Newly installed station at the Atotsu Entrance of ICRR. 4) Newly installed station at the Atotsu-KAGRA Entrance of ICRR. We first measured at the Atotsu Entrance for about an hour, then moved to the CLIO section. Then we measured each two times at S.G. and A.G. station for about half an hour by two gravimeters, alternately. The measurement time on each station is about 30 minutes to 1 hour like the way denoted above. We also made continuous measurements through the night-time to test the scale factor difference and to stabilize the instruments. As a result, we acquired two continuous sets of gravity data by the two gravimeters. After the earth tide correction, we gave offset values to each measurement sequences at each station, so that all the data are smoothly fitted to one line. Then we adopted the offset values as gravity differences between the stations. The gravity differences from the A.G. station are -0.096 mGal to the S.G. station, -50.084 mGal to the Atotsu-KAGRA Entrance station, and -53.684 mGal to the Atotsu Entrance station.

Acknowledgement

We appreciate Kamioka Observatory, ICRR for every convenience. We are also thankful to Nagoya University for allowing us to use CG-5 gravimeter.

Keywords: Gravity, Gravimetric Connection

Twelve Years of Gravity Observation at Kamioka with a Superconducting Gravimeter

*Yoshiaki Tamura¹, Yuichi Imanishi², Hiroshi Ikeda³, Kazunari Nawa⁴, Mituhiko Sugihara⁴, Ayumu Miyakawa⁴

1. National Astronomical Observatory of Japan, Mizusawa VLBI Observatory, 2. Earthquake Research Institute, The University of Tokyo, 3. Cryogenic Division, University of Tsukuba, 4. National Institute of Advanced Industrial Science and Technology

We had been carried out continuous gravity observation at Kamioka using GWR superconducting gravimeter (SG) model TT70#016. We started the observation in October 2004 and finished in April 2016. The observation site belongs to Institute for Cosmic Ray Research, University of Tokyo. The observation site is located about 1km under the ground and it is surrounded by rigid bedrock. The site is expected to provide quite and stable observation environment.

We got several observation results from SG such as Earth tide, free oscillation of the Earth, coseismic and postseismic gravity changes, seasonal change, and secular change. The SG has a low drift rate but it is difficult to distinguish secular gravity change from instrumental drift. To compensate the weakness of SG, we carried out absolute gravity measurements several times at Kamioka. In early time, Micro-g gravimeter FG5#210 of Kyoto University was used. In latter time, FG5#217 of AIST (National Institute of Advanced Industrial Science and Technology) was used. The data of absolute gravity measurements were used to discuss secular gravity change, and used for SG scale factor calibrations.

For the study of coseismic gravity change, we discussed the change caused by the Noto Hanto Earthquake in 2007. For the study of postseismic gravity change, we discovered steady decrease at the rate of about 10 micro gals per year in gravity after the great Tohoku Earthquake in March 2011. For the study of seasonal change, we found large seasonal gravity change of 10-30 micro gal. We investigated ground water behavior, especially the effect of fallen snow, to understand seasonal gravity change. We will report complete gravity observation results for twelve years at Kamioka.

Keywords: superconducting gravimeter, gravity change, Kamioka, Tohoku Earthquake