

Global Dynamic Exposure and the OpenBuildingMap - Communicating Risk and Involving Communities

*Danijel Schorlemmer^{1,5}, Thomas Beutin¹, Naoshi Hirata², Ken Xiansheng Hao³, Max Wyss⁴, Fabrice Cotton¹, Karsten Prehn¹


1. GFZ German Research Centre for Geosciences, 2. Earthquake Research Institute, University of Tokyo, Japan, 3. National Research Institute for Earth Science and Disaster Prevention, Tsukuba, Japan, 4. International Centre for Earth Simulation Foundation, Geneva, Switzerland, 5. University of Southern California, Los Angeles, USA

Detailed understanding of local risk factors regarding natural catastrophes requires in-depth characterization of the local exposure. Current exposure capture techniques have to find the balance between resolution and coverage. We aim at bridging this gap by employing a crowd-sourced approach to exposure capturing, focusing on risk related to earthquake hazard. OpenStreetMap (OSM), the rich and constantly growing geographical database, is an ideal foundation for this task. More than 3.5 billion geographical nodes, more than 200 million building footprints (growing by ~100'000 per day), and a plethora of information about school, hospital, and other critical facilities allows us to exploit this dataset for risk-related computations.

We are combining the strengths of crowd-sourced data collection with the knowledge of experts in extracting the most information from these data. Besides relying on the very active OpenStreetMap community and the Humanitarian OpenStreetMap Team, which are collecting building information at high pace, we are providing a tailored building capture tool for mobile devices. This tool is facilitating simple and fast building property capturing for OpenStreetMap by any person or interested community. With our OpenBuildingMap system, we are harvesting this dataset by processing every building in near-realtime. We are collecting exposure and vulnerability indicators from explicitly provided data (e.g. hospital locations), implicitly provided data (e.g. building shapes and positions), and semantically derived data, i.e. interpretation applying expert knowledge. The expert knowledge is needed to translate the simple building properties as captured by OpenStreetMap users into vulnerability and exposure indicators and subsequently into building classifications as defined in the Building Taxonomy 2.0 developed by the Global Earthquake Model (GEM) and the European Macroseismic Scale (EMS98). With this approach, we increase the resolution of existing exposure models from aggregated exposure information to building-by-building vulnerability.

We report on our method, on the software development for the mobile application and the server-side analysis system, and on the OpenBuildingMap (www.openbuildingmap.org), our global Tile Map Service focusing on building properties. The free/open framework we provide can be used on commodity hardware for local to regional exposure capturing, for stakeholders in disaster management and mitigation for communicating risk, and for communities to understand their risk.

Keywords: Seismic Hazard and Risk, Exposure, Citizen Science, Big Data

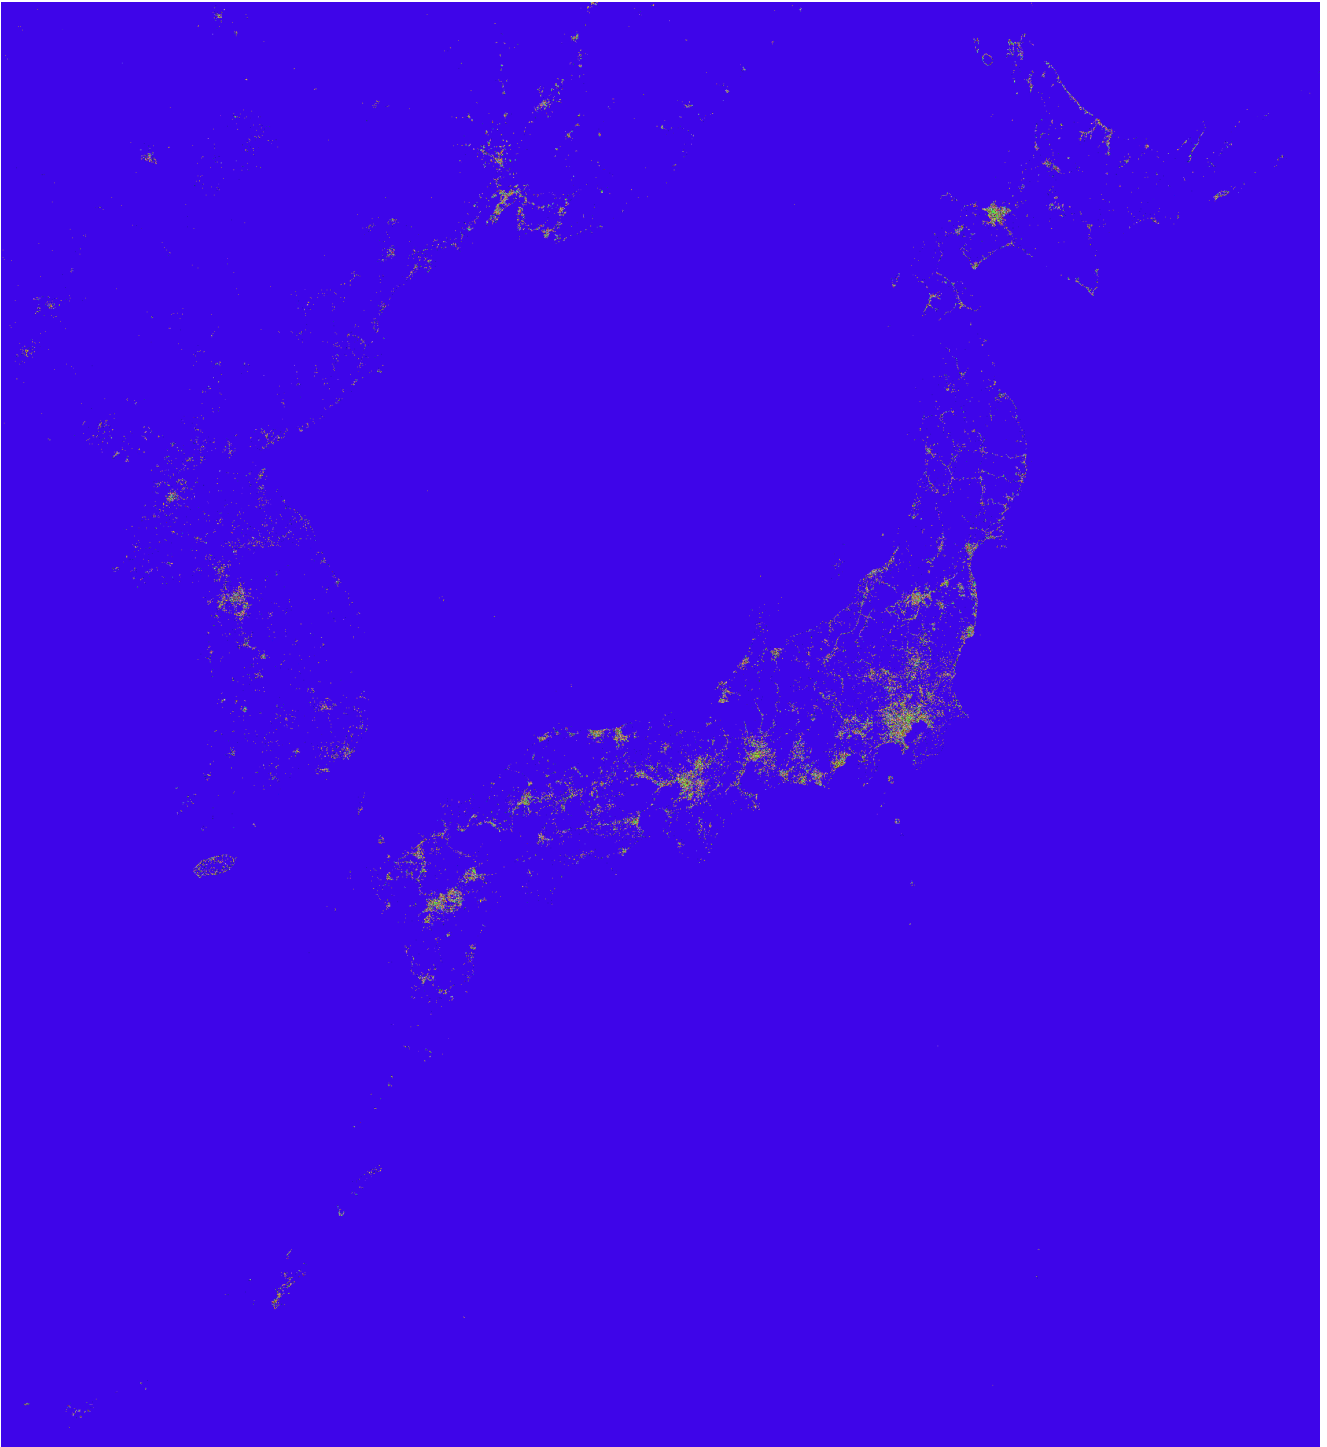

Citizen Earthquake Science in Taiwan: From Science to Hazard Mitigation

*Wen-Tzong Liang¹, Jian-Cheng Lee¹, Nai-Chi Hsiao², Kate Huihsuan Chen³, Simon C. Lin⁴

1. Institute of Earth Sciences, Academia Sinica, 2. Seismological Center, Central Weather Bureau, Taiwan, 3. Dept. Earth Science, National Taiwan Normal Univ., 4. Academia Sinica Grid Computing Centre, Taiwan

Taiwan is located at seismically highly active area, where is a convergent plate boundary zone between the Eurasian plate and the Philippine Sea plate. To bring seismology in a simple way to citizens at school and home, we are incorporating the Quake-Catcher Network (QCN) program into an educational seismic network that is maintained by teachers in more than 200 high schools in the whole island of Taiwan. We established a web-based educational platform so that users are encouraged to interact with these collected seismic waveform data and even to conduct further signal analysis on their own. In addition, to collect field observations for any earthquake-induced ground damages, such as surface fault rupture, landslide, rock fall, liquefaction, and landslide-triggered dam or lake, etc., we are developing an earthquake damage reporting system for public but particularly relying on trained volunteers who have taken a series of workshops, organized by this project. This Taiwan Earthquake Scientific Report (TSER) system is based on the Ushahidi mapping platform, which has been widely used for crowdsourcing. Some online games and materials for educational purposes on learning earthquakes will be ready in a near real-time manner for students and teachers. All These constructed products are now operated at the Taiwan Earthquake Research Center (TEC). With these newly developed platforms and materials, we are aiming not only to raise the earthquake awareness and preparedness, but also to encourage public participation in earthquake science in Taiwan.

Keywords: citizen science, crowdsourcing, Taiwan Earthquake Science Information System, Taiwan Earthquake Research Center

Japanese New Guidelines for the Information of the Prospect of Seismic Activity after Big Earthquakes and their Applications

*Noriko Kamaya¹, Kiyoshi Takeda¹, Tetsuo Hashimoto¹

1. Japan Meteorological Agency

A big earthquake of M6.5 with maximum seismic intensity 7 in Japan Meteorological Agency (JMA) seismic intensity scale occurred in Kumamoto Prefecture at 21:26 on 14 April, 2016 (Japan Standard Time). That was the beginning of the sequence of “The 2016 Kumamoto Earthquake”. After 18 hours of this earthquake, JMA issued prospect of aftershock activity that there was a possibility to suffer strong ground motion with JMA seismic intensity 5+ or 6- in some areas by aftershocks for about one week. The probability of aftershocks which cause JMA seismic intensity 6- in some areas was calculated to be 20% for the next 3 days from 16:00 on 15 April, and the number of the probability was announced by JMA. This prospect was based on guidelines determined by the Earthquake Research Committee (ERC) of the Headquarters of Earthquake Research Promotion (HERP) in 1998. However, after 10 hours of the issuance of the prospect, a bigger earthquake of M7.3 with JMA seismic intensity 7 occurred at 01:25 on 16 April in the same region as the first big earthquake of M6.5, and triggered distant earthquakes. The seismically active area was finally spread southwest to northeast up to about 150km long from Kumamoto Prefecture to Oita Prefecture. As this seismic activity was revealed that it was not a simple mainshock - aftershock patterns, JMA stopped issuance of the following information about prospect of aftershock activity. Instead of issuance of prospect, JMA called attention to people to high seismic activity and strong ground motion by big earthquakes on the basis of previous cases in that area.

With lessons learned from this, seismologists and JMA discussed under a framework of the HERP, and the ERC of HERP published new guidelines for the information of the prospect of aftershock activity after big earthquakes in August 2016. The points of the guidelines are followings.

- (1) JMA calls attention to strong ground motion which is similar level to the first big earthquake for about one week after big earthquakes.
- (2) If there were prior cases of foreshock - mainshock - aftershock series or earthquakes with similar magnitude which occurred in the short term near the big earthquakes, JMA calls attention to such cases.
- (3) If active faults and assumed source regions of big thrust-type subduction-zone earthquakes existed near the big earthquakes, JMA explains the characteristics and calls keeping in mind them.
- (4) After one week, if the active seismic activity continues, JMA issues aftershock probability. The probability is shown by magnification ratio which compares to the probability just after the biggest earthquake and before the big earthquakes.
- (5) JMA uses a word “earthquake” instead of “aftershock” when JMA calls to attention to strong ground motion by aftershocks, because the word of “aftershock” gave some impression to people that bigger earthquakes would not occur.

We will introduce new Japanese guidelines and show some actual examples of its applications.

Keywords: Kumamoto Earthquake, Prospect of Seismic Activity, Aftershock Probability, Seismic Information, Aftershock

The influence of the Kumamoto earthquakes on public risk perception and trust toward authorities

*Shoji Ohtomo¹, Reo Kimura², Naoshi Hirata³

1. Konan Women's University, 2. University of Hyogo, 3. University of Tokyo

The magnitude 6.2 foreshock on the 14th of April and the magnitude 7.3 main shock on the 16th of April happened in the 2016 Kumamoto earthquakes. The main shock over than the magnitude 6.2 was not anticipated because the foreshock was considered to be the main shock. After the earthquakes, the meteorological agency changed the policy to discontinue the announcement of probability of aftershock occurrence. The experience of Kumamoto earthquakes and the policy change of risk communication may affect public risk perception of earthquake and trust toward authorities. For example, the Fukushima nuclear accident that was an unexpected disaster changed the perception of nuclear risk and trust toward the authorities (i.e. Government, electronic power company) to negative (Ohtomo et al., 2014). Social amplification of risk is occurred after the large-scale accident or disaster (Slovic et al., 1991). The social amplification makes people exaggerate risk perceptions and aversive reactions. The study examines how the people suffered from the Kumamoto earthquakes perceive an earthquake risk and evaluate trust toward authorities. In the study, the damages and coping behaviors after the foreshock, main shock, and the policy change of the meteorological agency were measured to investigate the influence on the risk perception and trust.


The mail survey was implemented from the end of November to the middle of December in 2016.

Respondents were collected based on the level of earthquake damage and population ratio of areas in Kumamoto prefecture. The figure showed the framework of the questionnaire. The study analyzed the relationships between the damages and coping behaviors and risk perceptions of earthquake and trusts toward the government, meteorological agency, and local governments.

The study illustrates the patterns of coping behavior after the shocks and the policy change affected the risk perception and trusts, in addition to the level of earthquake damage. Especially, there might be differences between people who changed coping behaviors and people without change after the main shock. Implications for risk communication of earthquake are discussed herein.

Keywords: Kumamoto earthquakes, risk communication, risk perception, social amplification, trust

Time →

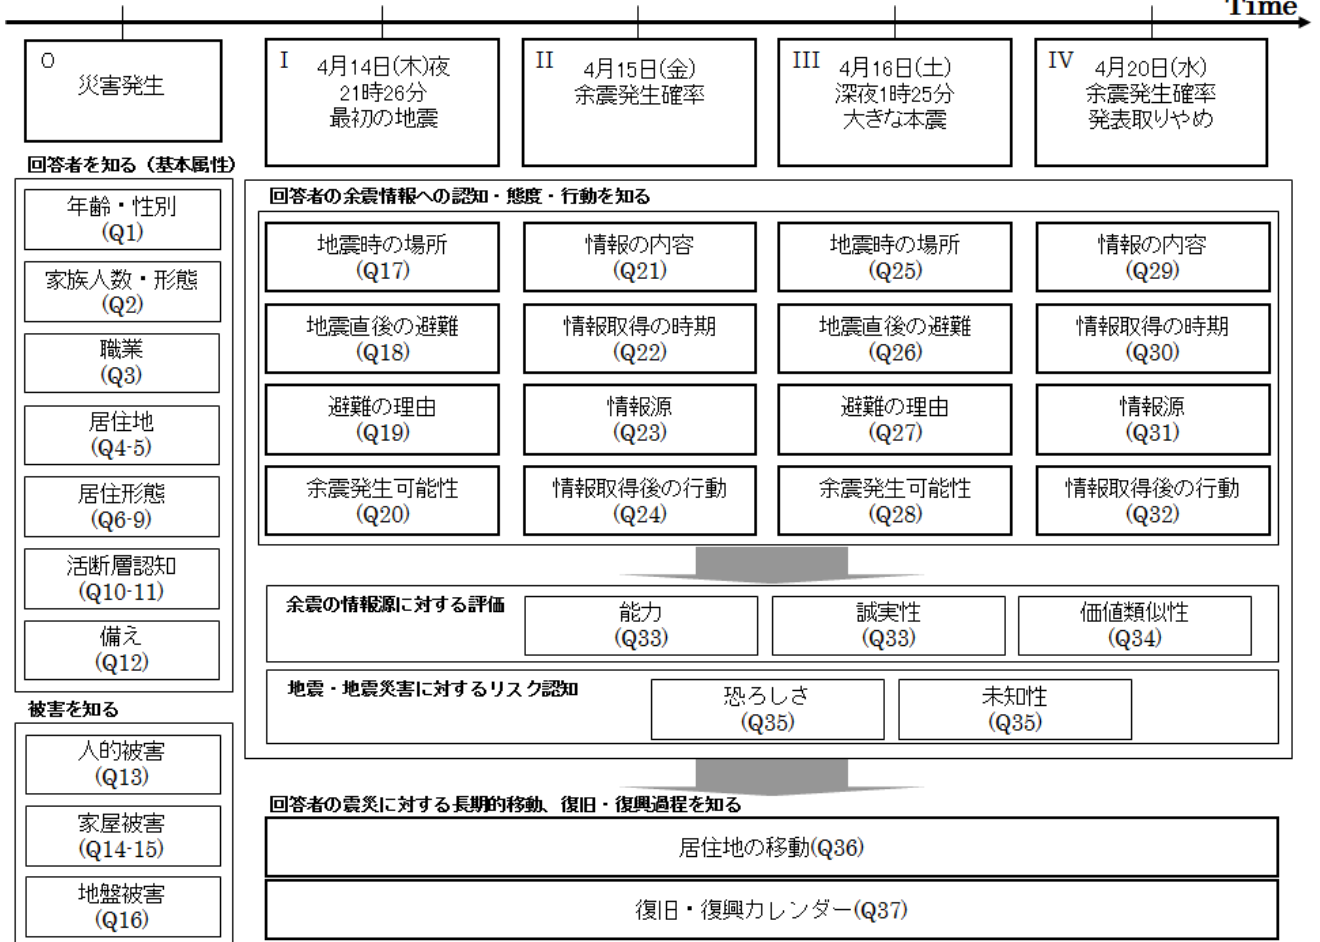

The Importance of Seismic Death Risk Assessment Each Household Unit

*NAKASHIMA TADAYOSHI¹, OKADA SHIGEYUKI¹

1. Hokkaido University

1.Introduction

The Kumamoto earthquake started with a foreshock at 21:26 in April 14, 2016. It had an Mj of 6.5 and a Japan Meteorological Agency (JMA) seismic intensity of 7 in Mashiki town (JMA 2016). The subsequent mainshock of which Mj was 7.3 occurred at 01:25 JST in April 16, 2016. Accordingly, the people staying in Mashiki town have experienced tremendous strong motions of a JMA seismic intensity of 7 twice a couple of days (JMA 2016). The 2016 Kumamoto earthquake resulted in the death of 50 people in the Kumamoto Prefecture (2016).

The highest death count was recorded in Mashiki town, where 19 people totally killed by collapsed buildings. The death count breakdown showed that 7 and 12 people killed during the foreshock and the mainshock, respectively. During a series of disasters, many people in Mashiki town evacuated to designated evacuation sites or rushed to their own cars immediately after the foreshock. It resulted that the foreshock activates residents to evacuate into safer sites and decreases killed people by the subsequent mainshock. We estimated that the total number of deaths caused by building damage from a series of shocks would reach to 45, if nobody could evacuate after the foreshock. Result, the death toll decreased by 26 people (Nakashima and Okada, 2016). Generally, most of people evacuated are prone to return home as time goes by. As a result, many people die at the time of a subsequent mainshock. It is important to provide death risk information to each household for the purpose of supporting their decision making of appropriate evacuation.

2.Method

We estimate the death risk of the household where the dead occurred due to collapse building. The death ratio of household was obtained by applying the equations of Nakashima and Okada (2008, 2016).

3.Risk Estimation for Household Unit

Using the proposed method, we estimate the death rate of each household for the main shock and the foreshock. Consider as an example that a house is built in the 1970s and three people stay there at the earthquake occurs. Assuming that the seismic intensity of the foreshock is 6.49 and the main shock is 6.77, the occurrence probability of wooden building damage in the foreshock is estimated to 12% at the damage degree of D4 and 6% at D 5 and 1% at D 6, and it increases to 16% at D4 and 18% at D5 and 12% at D6 in the mainshock. In addition, the probability of death increases to 3% in the foreshock and 15% in the main shock. Similar results were obtained for other households.

4.Conclusion

Such information about death risk each household unit will be useful for decision-making of the evacuation start immediately after the disaster.

1)Japan Meteorological Agency: The 2016 Kumamoto Earthquake Portal

2)Kumamoto Prefecture: Damage situation by the Kumamoto earthquake (83rd Report), 6, 3, 2016 (in Japanese).

3)National Police Agency: Damage and police measures in the 2016 Kumamoto earthquake, 4, 28,2016

(in Japanese).

4) Tadayoshi Nakashima and Shigeyuki Okada: Trial Calculation of Reduction Effect on Casualties by the Foreshock in The 2016 Kumamoto Earthquake, The Seismological Society of Japan: program and abstracts, 2016

5) Nakashima Tadayoshi and Shigeyuki Okada: Seismic strengthening strategy for wood frame dwellings targeting to minimize the death toll from a view point of temporal variation -case study for Tokai region, Japan, in the forthcoming Tokai-Tonankai earthquake, Journal of Structural and Construction Engineering, 73, 623, 79-86, 2008

6) Shigeyuki OKADA, Tadayoshi NAKASHIMA, et al: A NEW CAUSALITY MODEL FOR EVALUATING THE PROBABILITY OF HUMAN DAMAGE FROM INJURY TO DEATH IN COLLAPSED BUILDINGS, Proceeding of 16th World Conference on Earthquake Engineering, pp.1-10, 2017.

Keywords: The 2016 Kumamoto Earthquake, casualty, Risk assessment

Estimating Resource Management of Nursing Home Support in the Assumed Tokyo Metropolitan Earthquake

*Keiko TAMURA¹, Munenari INOBUCHI²

1. Risk Management Office, Risk Management Headquarters, Niigata University, 2. Faculty of Informatics, Shizuoka University

Abstract

This study proposes elements for creating scenarios covering those needing support during a natural disaster, comprising: 1) coefficients for scenarios concerning those needing support during a disaster, and 2) quantitative damage estimation cases related to facilities for those needing support during a disaster. These elements have not been incorporated into conventional damage estimation. The scenarios were applied to Tokyo, which is assumed to be an area affected by earthquakes occurring directly beneath the Tokyo Metropolitan Area, to establish a support system and implement map training.

Estimate the Resources Damage

2011 East Japan Earthquake created disaster awareness in Japan more than ever before. The fact raises awareness more that the possible occurrence of the Mega Urban Earthquake, which directly hits Tokyo is expected 70% in 30 years. The research outcome is highly expected to implement the workable disaster response in social welfare field.

We constructed the geospatial data of social welfare facilities in Tokyo. 1609 facilities exist which contribute facility care services. We overlapped the layer of this map to the seismic intensity map of assumed Earthquake in northern Tokyo Bay, which is expected to bring the most severe damage. There were 12 types of facilities categorized by the class of social services; however, detailed classification is not necessary for disaster responders to consider the resource dispatch in emergency phase. So we re-classified those 12 to 5 focusing on the disaster vulnerabilities. Figure 2 shows the result of the analysis. There were 97.1% facilities are in the area of over intensity 5 upper, which means that 104,879 people might be affected; however their numbers contains self-reliant people. The important thing is to detect how much reliant people in the category named "Diverse Range of Caretakers" in order to implement the resource assessment properly.

As the outcome of this research Tokyo Metropolitan Social Welfare Council decided to improve resource management system based on our research outcomes; 1) construct operational posts of social welfare support in each administrative district, 2) develop task forces in order to be varied to suit the situation after disasters. The resource management model made it possible to vary the situation on real time basis. The goal of this study is to establish disaster reduction measures to avoid a national crisis by dividing the fluctuating and independent part: the former is addressed by disaster reduction policies, while the latter is tackled by proposing and implementing disaster reduction action plans. The research results were proposed in "study committee of broad welfare support for disasters in Tokyo" to facilitate better understanding of the assumed damage of those needing support and welfare facilities during earthquakes occurring directly beneath the Tokyo Metropolitan Area. The accomplishments of this study include proposing components for scenarios to be established concerning those needing support during a national crisis disaster. For this purpose, a study on the services of an organization structure, including expert volunteers, was led by the Tokyo Council of Social Welfare, which usually works for those who needs nursing care.

- Keiko Tamura, Munenari Inoguchi, Constructing Resource Assessment Method of Vulnerable People Support in the Assumed Tokyo Metropolitan Earthquake, ITC-CSCC 2015, 2015.6, 20-21
- Proposal of Elements for Creating Scenarios for Those Needing Support During National Disasters (Special Issue on the Worst Disaster Damage Scenarios Resulting National Crisis and Reduction), Journal of disaster research 11(5), 870-880, 2016-10
- S.Suzuki, "Geo Portal Online, Urban Resilience Project" , <http://mexturp.maps.arcgis.com/home/>, 2015.

Keywords: Tokyo Metropolitan Earthquake, Vulnerable population, Resource management

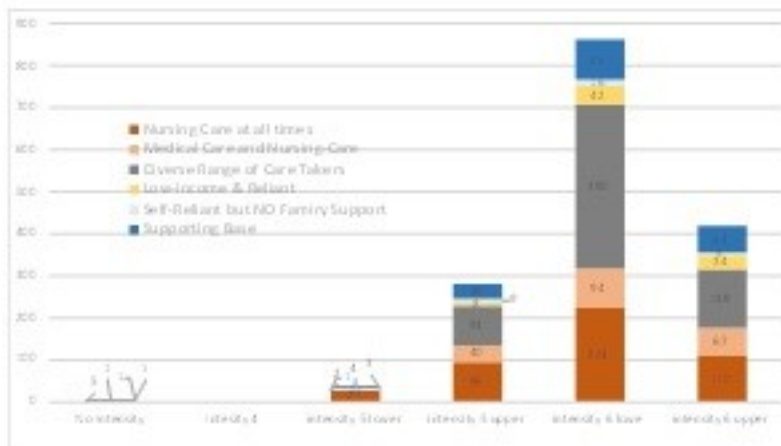


Fig. Social Welfare Facilities Classified in Assumed Seismic Intensity Scale of the Japan Meteorological Agency